


# Limit Switches **CM series**

## Summary

**APPROVALS:** UL 508 / CSA C22-2 N. 14 / IEC 60947-5-1



CB-SCHEME certification according to IEC 60947-5-1

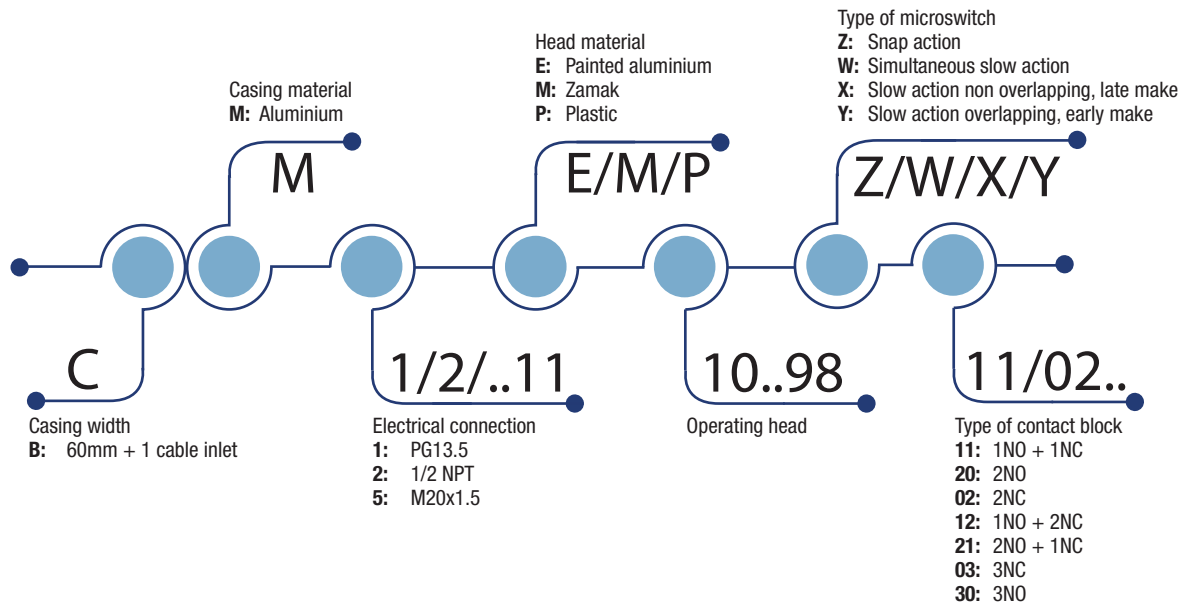

## HOW IS IT MADE?

### 01 A variety of actuators

- Plain plunger
- Roller plunger
- Roller lever, adjustable or not, etc.

### 02 Wide range of heads

- Assembled using 4 x Ø4 screws

### 03 Casing:

- 60 mm. with dimensions acc. to EN 50041

### 04 Mounting screws

- 2 x M5 screws on top part

### 05 Cover

- 4 screws 3 pozidriv 1

### 06 Contact Block


- Positive opening operation
- Snap action or slow action
- Electrically separated contacts

### 07 Connecting terminals

- Block of 2 contacts: M3.5 (+, -) pozidriv 2 screw
- Block of 3 contacts: M3 (+, -) screw
- Screw head with captive cable clamp
- Markings conform with IEC 60947-1, IEC 60947-5-1 standards

### 08 Electrical connection

- 3 x threaded cable inlets suitable for cable gland

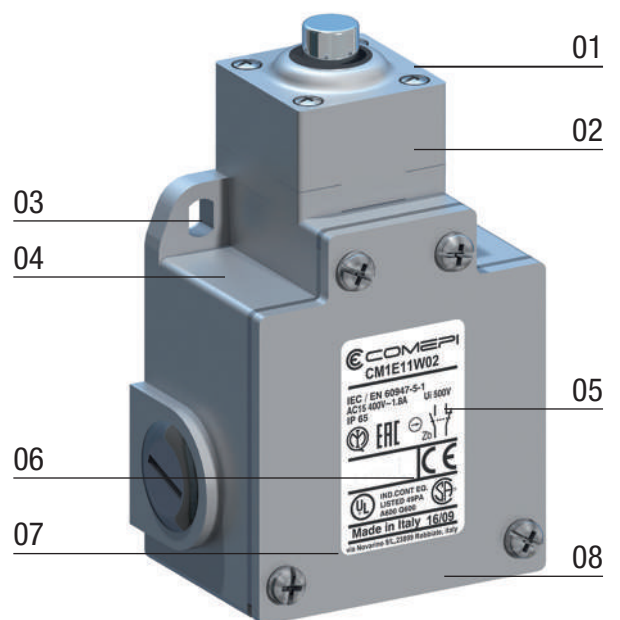

# Limit Switches **CM series**

## Description

### APPLICATIONS

Easy to use, electromechanical limit switches offer specific qualities:

- Visible operation.
- Able to switch strong currents (10 A conventional thermal current).
- Electrically separated contacts.
- Precise operating points (consistency).
- Immune to electromagnetic disturbances.

They are purpose-built detection devices thanks to these characteristics:


- Presence/absence.
- Positioning and travel limit.
- Objects passing/counting.

### DESCRIPTION

Limit switches, which are made aluminium, are mechanically more resistant and three times lighter than the ones in zinc alloy and they offer a degree of protection of IP66.

They comply with the requirements of European Directives (Low Voltage and RoHS) and are conform to European and International Standards.

The CE declaration of these products are available in the download section of website [www.comepi.it](http://www.comepi.it) or by writing to the following email address: [tecnico@comepi.it](mailto:tecnico@comepi.it)  
DDC02 - Limit Switches.

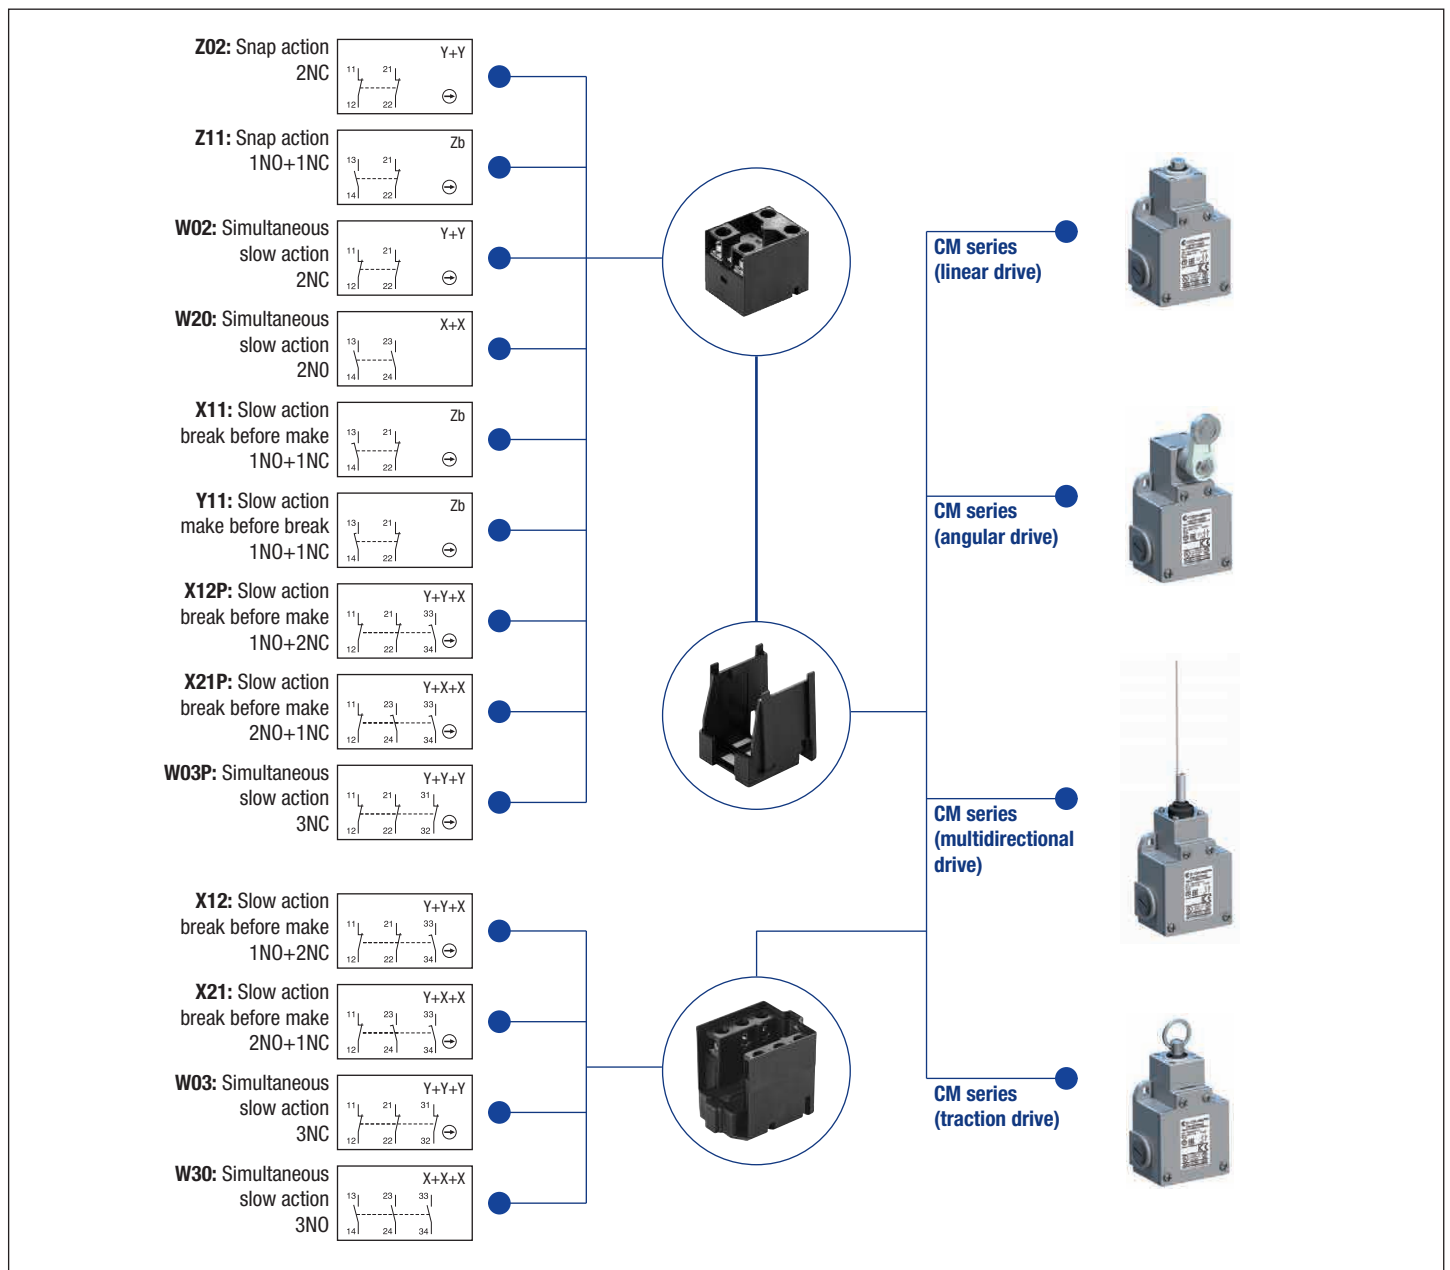

# Limit Switches **CM series**

## Technical Data


	<b>CM Series</b>	
<b>Standards</b>	IEC 60947-5-1 EN 60947-5-1	
<b>Certifications - Approvals</b>	UL - CSA - IMQ - EAC - CCC - UKCA	
<b>Air temperature</b> near the device		
– during operation	°C	– 25 ... + 70
– for storage	°C	– 30 ... + 80
<b>Mounting positions</b>	All positions are authorised	
<b>Protection against electrical shocks</b> (acc. to IEC 61140)	Class I	
<b>Degree of protection</b> (according to IEC 60529 and EN 60529)	IP 66*	

### Electrical Data


<b>Rated insulation voltage <math>U_i</math></b> - according to IEC 60947-1 and EN 60947-1 - according to UL 508 and CSA C22-2 n° 14	500 V (degree of pollution 3) (400 V for contacts type Z02) A 600, Q 600	
<b>Rated impulse withstand voltage <math>U_{imp}</math></b> (according to IEC 60947-1 and EN 60947-1)	kV	6
<b>Conventional free air thermal current <math>I_{th}</math></b> (according to IEC 60947-5-1) $\theta < 40$ °C	A	10
<b>Short-circuit protection</b> $U_e < 500$ V a.c. - gG (gl) type fuses	A	10
<b>Rated operational current</b> $I_e$ / AC-15 (according to IEC 60947-5-1)	24 V - 50/60 Hz A 120 V - 50/60 Hz A 400 V - 50/60 Hz A	10 6 4 (1.8A for contacts type X12, X21, W03, W30)
$I_e$ / DC-13 (according to IEC 60947-5-1)	24 V - d.c. A 125 V - d.c. A 250 V - d.c. A	6 (2.8A for contacts type X12, X21, W03, W30) 0.55 0.4 (0.27A for contacts type X12, X21, W03, W30)
<b>Switching frequency</b>	Cycles/h	3600
<b>Load factor</b>		0.5
<b>Resistance between contacts</b>	m $\Omega$	25
<b>Connecting terminals</b>	M3.5 (+, -) pozidriv 2 screw with cable clamp (M3 for 3 poles contacts type)	
<b>Terminal for protective conductor</b>	M3.5 (+, -) pozidriv 2 screw with cable clamp	
<b>Connecting capacity</b>	1 or 2 x mm <sup>2</sup>	0.34 ... 2.5 (0.34... 1.5 for 3 poles contacts type)
<b>Terminal marking</b>	According to IEC 60947-5-1	
<b>Recommended tightening torque</b>	<b>Metal</b>	
<b>Cover</b>	0,8Nm, max 0,9	
<b>Head</b>	0,8Nm, max 0,9	
<b>Microswitch</b>	0,8Nm, max 0,9	
<b>Mechanical durability</b>	30 millions of operations 25 millions of operations 10 millions of operations	P11; M13; E11...13; E21...23; E31...33 M41...75; E41...75 P91...93; M14; M19; E91...93; E99
<b>Electrical durability</b> (according to IEC 60947-5-1)	Utilization categories AC-15 and DC-13 (Load factor of 0.5 according to curves below)	

\* except for E54, E92, E93, P92, P93, M54: the degree of protection is IP65

### AC-15 - Snap action

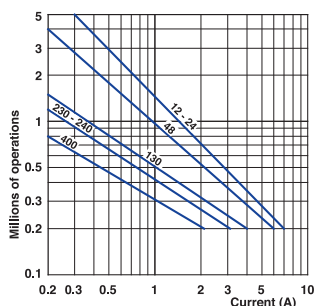

### AC-15 - Slow action

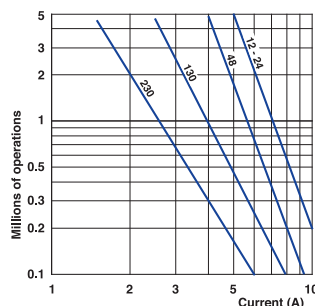

DC-13	Snap action	Slow action
	Power breaking for a durability of 5 million operating cycles	
Voltage 24 V	9.5 W	12 W
Voltage 48 V	6.8 W	9 W
Voltage 110 V	3.6 W	6 W

# Limit Switches **CM series**

## Technical Data

### Technical data approved by IMQ

<b>Standards</b>	Devices conform with international IEC 60947-5-1 and European EN 60947-5-1 standards	
<b>Degree of protection</b>	IP 66*	
<b>Rated insulation voltage <math>U_i</math></b>	500 V (degree of pollution 3) (400V for type Z02)	
<b>Rated impulse withstand voltage <math>U_{imp}</math></b>	6 kV	
<b>Conventional free air thermal current <math>I_{th}</math></b>	10 A	
<b>Short-circuit protection - gG (gl) type fuses</b>	10 A	
<b>Rated operational current</b>		
$I_e$ / AC-15	24 V - 50/60 Hz	10 A
	400 V - 50/60 Hz	4 A (1.8A for contacts type X12, X21, W03, W30)
$I_e$ / DC-13	24 V - d.c.	6 A (2.8A for contacts type X12, X21, W03, W30)
	125 V - d.c.	0.55 A
	250 V - d.c.	0.4 A (0.27A for contacts type X12, X21, W03, W30)

\* except for E54, E92, E93, P92, P93, M54: the degree of protection is IP65

### Technical data approved by UL

<b>Standards</b>	Devices conform with UL 508
<b>Contact blocks type Z11, X11, Y11, W02 and Z02</b>	
<b>Utilization categories</b>	A600, Q600
<b>Contact blocks type X12, X21, W03 and W30</b>	
<b>Utilization categories</b>	A600, Q600


Use 60/75°C copper (Cu) conductor only. Wire rages 14-18 AWG stranded or solid. The terminal tightening torque of 7 lbs-in / 0.78 Nm. Suitable for conduit connection only with use of adapter sleeve optionally provided or recommended by the manufacturer.

For the complete list of approved products, contact our technical department

## IMPLEMENTATION


### Operating head orientation

The head can be rotated each 90°. Recommended tightening torque 0,5 Nm (max 0,8 Nm).


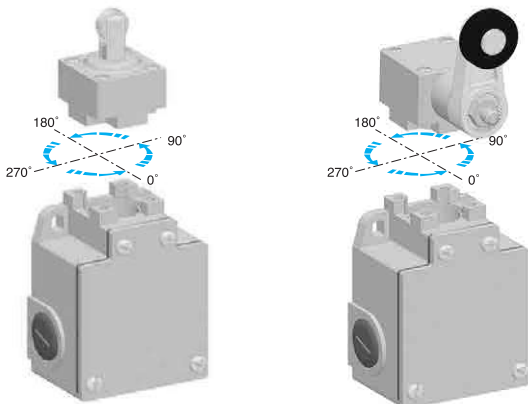


### Lever adjustment


The lever of the angular actuators can be adjusted every 9° and round turned in order to obtain the maximum flexibility on the working plan. Recommended tightening torque 0,5 Nm (max 0,8 Nm).

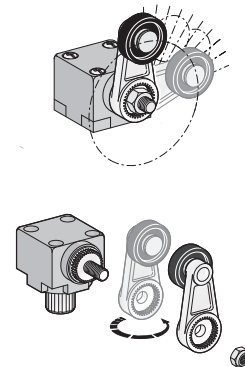

### Operating mode selection (CM\_E Series only)

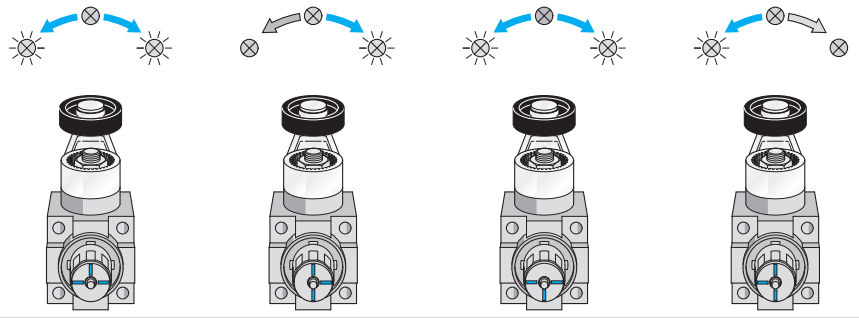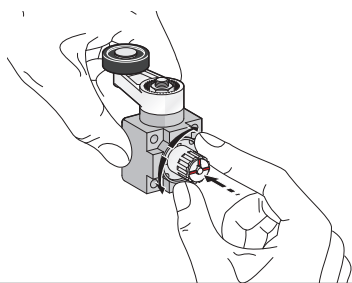

## Special Versions



### Low Temperature

The limit switches for low temperature applications are useful for refrigerated cells or equipments where the air operational temperature is very low.

These devices, made in special materials, are able to extend the operational temperature range down to -40°C, maintaining mechanical performances intact. To order add the digits "40" following the operating head indication in part number.


For example: CM1E11Z11 ▶ CM1E1140Z11

# Limit Switches **CM\_E** series

## Metal Casing IP66 - 60 mm. width

### Electrical connection:


- CM1:** three cable inlets for PG 13,5 Cable Gland
- CM2:** three cable inlets for 1/2" NPT Cable Gland
- CM5:** three cable inlets for M20 x 1,5 Cable Gland

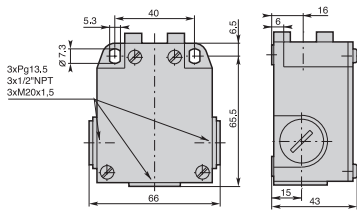

### Contact Blocks


<b>Z11</b> (1NO + 1NC)	CM•E11Z11	CM•E12Z11	CM•E13Z11
<b>X11</b> (1NO + 1NC)	CM•E11X11	CM•E12X11	CM•E13X11
<b>Y11</b> (1NO + 1NC)	CM•E11Y11	CM•E12Y11	CM•E13Y11
<b>W02</b> (2NC)	CM•E11W02	CM•E12W02	CM•E13W02
<b>W20</b> (2NO)	CM•E11W20	CM•E12W20	CM•E13W20
<b>Z02</b> (2NC)	CM•E11Z02	CM•E12Z02	CM•E13Z02
<b>X12</b> (1NO + 2NC)	CM•E11X12	CM•E12X12	CM•E13X12
<b>X21</b> (2NO + 1NC)	CM•E11X21	CM•E12X21	CM•E13X21
<b>W03</b> (3NC)	CM•E11W03	CM•E12W03	CM•E13W03
<b>W30</b> (3NO)	CM•E11W30	CM•E12W30	CM•E13W30

### E11 - Stainless steel plain plunger




Min. actuating force  
Weight **30N (45N ⊖)**  
265 g

### E12 - Stainless steel ball plunger




Min. actuating force  
Weight **30N (45N ⊖)**  
265 g

### E13 - Stainless steel Ø12 roller plunger




Min. actuating force  
Weight **22N (40N ⊖)**  
270 g

### E21 - Stainless steel lateral plain plunger




Min. actuating force  
Weight **30N (50N ⊖)**  
285 g

### E22 - Stainless steel lateral plunger with Ø12 vertical roller



Min. actuating force  
Weight **30N (50N ⊖)**  
290 g

### E23 - Stainless steel lateral plunger with Ø12 horizontal roller



Min. actuating force  
Weight **30N (50N ⊖)**  
290 g

### Contact Blocks

<b>Z11</b> (1NO + 1NC)	CM•E21Z11	CM•E22Z11	CM•E23Z11
<b>X11</b> (1NO + 1NC)	CM•E21X11	CM•E22X11	CM•E23X11
<b>Y11</b> (1NO + 1NC)	CM•E21Y11	CM•E22Y11	CM•E23Y11
<b>W02</b> (2NC)	CM•E21W02	CM•E22W02	CM•E23W02
<b>W20</b> (2NO)	CM•E21W20	CM•E22W20	CM•E23W20
<b>Z02</b> (2NC)	CM•E21Z02	CM•E22Z02	CM•E23Z02
<b>X12</b> (1NO + 2NC)	CM•E21X12	CM•E22X12	CM•E23X12
<b>X21</b> (2NO + 1NC)	CM•E21X21	CM•E22X21	CM•E23X21
<b>W03</b> (3NC)	CM•E21W03	CM•E22W03	CM•E23W03
<b>W30</b> (3NO)	CM•E21W30	CM•E22W30	CM•E23W30


Operation diagrams: page 125 - All dimensions are in mm

# Limit Switches **CM\_E** series

## Metal Casing IP66 - 60 mm. width

### Electrical connection:

- CM1:** three cable inlets for PG 13,5 Cable Gland  
**CM2:** three cable inlets for 1/2" NPT Cable Gland  
**CM5:** three cable inlets for M20 x 1,5 Cable Gland

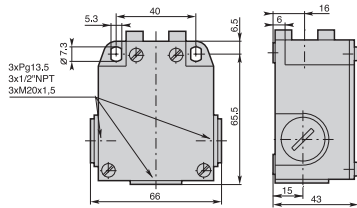


### Contact Blocks

<b>Z11</b> (1NO + 1NC)	CM•E31Z11	CM•E32Z11	CM•E33Z11	CM•E41Z11	CM•E42Z11
<b>X11</b> (1NO + 1NC)	CM•E31X11	CM•E32X11	CM•E33X11	CM•E41X11	CM•E42X11
<b>Y11</b> (1NO + 1NC)	CM•E31Y11	CM•E32Y11	CM•E33Y11	CM•E41Y11	CM•E42Y11
<b>W02</b> (2NC)	CM•E31W02	CM•E32W02	CM•E33W02	CM•E41W02	CM•E42W02
<b>W20</b> (2NO)	CM•E31W20	CM•E32W20	CM•E33W20	CM•E41W20	CM•E42W20
<b>Z02</b> (2NC)	CM•E31Z02	CM•E32Z02	CM•E33Z02	CM•E41Z02	CM•E42Z02
<b>X12</b> (1NO + 2NC)	CM•E31X12	CM•E32X12	CM•E33X12	CM•E41X12	CM•E42X12
<b>X21</b> (2NO + 1NC)	CM•E31X21	CM•E32X21	CM•E33X21	CM•E41X21	CM•E42X21
<b>W03</b> (3NC)	CM•E31W03	CM•E32W03	CM•E33W03	CM•E41W03	CM•E42W03
<b>W30</b> (3NO)	CM•E31W30	CM•E32W30	CM•E33W30	CM•E41W30	CM•E42W30

### E3• - One way lever


E31: Ø22 nylon roller E32: Ø22 stainless steel roller



Min. actuating force  
Weight

**12N (40N ⊖)**  
305 g

### E33 - One way lever Ø22 steel ball bearing




Min. actuating force  
Weight

**12N (40N ⊖)**  
305 g

### E4• - Ø22 roller lever


E41: Ø22 nylon roller E42: Ø22 stainless steel roller



Min. actuating torque  
Weight

**0,15Nm (0,30Nm ⊖)**  
305 g


### E43 - Ø22 roller lever steel ball bearing



Min. actuating torque  
Weight

**0,15Nm (0,30Nm ⊖)**  
305 g


### E44 - Ø50 rubber roller lever



Min. actuating torque  
Weight

**0,15Nm (0,30Nm ⊖)**  
315 g

### E48 - Lever with nylon roller Ø20



Min. actuating torque  
Weight

**0,15Nm (0,30Nm ⊖)**  
340 g

### Contact Blocks

<b>Z11</b> (1NO + 1NC)	CM•E43Z11	CM•E44Z11	CM•E48Z11
<b>X11</b> (1NO + 1NC)	CM•E43X11	CM•E44X11	CM•E48X11
<b>Y11</b> (1NO + 1NC)	CM•E43Y11	CM•E44Y11	CM•E48Y11
<b>W02</b> (2NC)	CM•E43W02	CM•E44W02	CM•E48W02
<b>W20</b> (2NO)	CM•E43W20	CM•E44W20	CM•E48W20
<b>Z02</b> (2NC)	CM•E43Z02	CM•E44Z02	CM•E48Z02
<b>X12</b> (1NO + 2NC)	CM•E43X12	CM•E44X12	CM•E48X12
<b>X21</b> (2NO + 1NC)	CM•E43X21	CM•E44X21	CM•E48X21
<b>W03</b> (3NC)	CM•E43W03	CM•E44W03	CM•E48W03
<b>W30</b> (3NO)	CM•E43W30	CM•E44W30	CM•E48W30


Operation diagrams: page 125 - All dimensions are in mm

# Limit Switches **CM\_E** series

## Metal Casing IP66 - 60 mm. width

### Electrical connection:

- CM1:** three cable inlets for PG 13,5 Cable Gland  
**CM2:** three cable inlets for 1/2" NPT Cable Gland  
**CM5:** three cable inlets for M20 x 1,5 Cable Gland


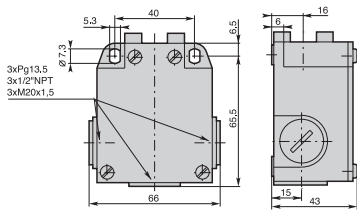


### Contact Blocks

<b>Z11</b> (1NO + 1NC)	CM•E51Z11	CM•E52Z11	CM•E53Z11	CM•E54Z11
<b>X11</b> (1NO + 1NC)	CM•E51X11	CM•E52X11	CM•E53X11	CM•E54X11
<b>Y11</b> (1NO + 1NC)	CM•E51Y11	CM•E52Y11	CM•E53Y11	CM•E54Y11
<b>W02</b> (2NC)	CM•E51W02	CM•E52W02	CM•E53W02	CM•E54W02
<b>W20</b> (2NO)	CM•E51W20	CM•E52W20	CM•E53W20	CM•E54W20
<b>Z02</b> (2NC)	CM•E51Z02	CM•E52Z02	CM•E53Z02	CM•E54Z02
<b>X12</b> (1NO + 2NC)	CM•E51X12	CM•E52X12	CM•E53X12	CM•E54X12
<b>X21</b> (2NO + 1NC)	CM•E51X21	CM•E52X21	CM•E53X21	CM•E54X21
<b>W03</b> (3NC)	CM•E51W03	CM•E52W03	CM•E53W03	CM•E54W03
<b>W30</b> (3NO)	CM•E51W30	CM•E52W30	CM•E53W30	CM•E54W30


### E5 - Adjustable Ø22 roller lever

E51: nylon roller E52: stainless steel roller




Min. actuating torque **0,15Nm (0,30Nm ⊖)**  
 Weight **325 g**

### E53 - Adjustable Ø22 roller lever with steel ball bearing




Min. actuating torque **0,15Nm (0,30Nm ⊖)**  
 Weight **325 g**

### E54 - Adjustable Ø50 rubber roller lever




Min. actuating torque **0,15Nm**  
 Weight **330 g**

### E61 - Nylon actuator with stainless steel spring



Min. actuating torque **0,15Nm**  
 Weight **330 g**


### E62 - Stainless steel spring actuator



Min. actuating torque **0,15Nm**  
 Weight **330 g**

### E7 - Adjustable Ø3 rod lever

E71: stainless steel rod E73: fiberglass rod



Min. actuating torque **0,15Nm (0,30Nm ⊖)**  
 Weight **330 g**

### Contact Blocks

<b>Z11</b> (1NA + 1NC)	CM•E61Z11	CM•E62Z11	CM•E71Z11	CM•E73Z11
<b>X11</b> (1NA + 1NC)	CM•E61X11	CM•E62X11	CM•E71X11	CM•E73X11
<b>Y11</b> (1NA + 1NC)	CM•E61Y11	CM•E62Y11	CM•E71Y11	CM•E73Y11
<b>W02</b> (2NC)	CM•E61W02	CM•E62W02	CM•E71W02	CM•E73W02
<b>W20</b> (2NA)	CM•E61W20	CM•E62W20	CM•E71W20	CM•E73W20
<b>Z02</b> (2NC)	CM•E61Z02	CM•E62Z02	CM•E71Z02	CM•E73Z02
<b>X12</b> (1NA + 2NC)	CM•E61X12	CM•E62X12	CM•E71X12	CM•E73X12
<b>X21</b> (2NA + 1NC)	CM•E61X21	CM•E62X21	CM•E71X21	CM•E73X21
<b>W03</b> (3NC)	CM•E61W03	CM•E62W03	CM•E71W03	CM•E73W03
<b>W30</b> (3NA)	CM•E61W30	CM•E62W30	CM•E71W30	CM•E73W30


Operation diagrams: page 125 - All dimensions are in mm

# Limit Switches **CM\_E** series

## Metal Casing IP66 - 60 mm. width


### Electrical connection:

- CM1:** three cable inlets for PG 13,5 Cable Gland  
**CM2:** three cable inlets for 1/2" NPT Cable Gland  
**CM5:** three cable inlets for M20 x 1,5 Cable Gland

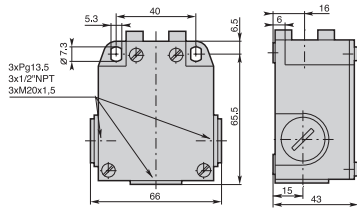


### E7• - Adjustable rod lever

E72: Ø6 nylon rod lever E74: Ø6 fiberglass rod lever

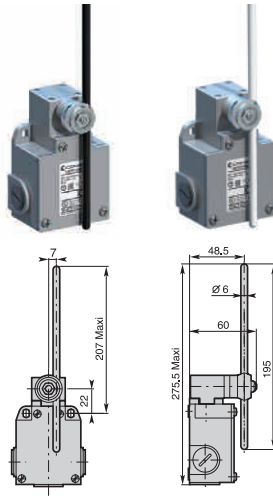


Min. actuating torque 0,15Nm (0,30Nm ⇄)  
 Weight 330 g

### E75 - Adjustable 3x3 square steel rod lever

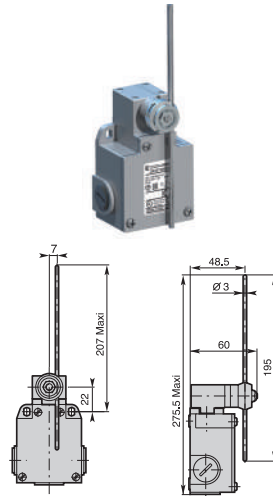

Min. actuating torque 0,15Nm (0,30Nm ⇄)  
 Weight 330 g

### E91 - Stainless steel spring multidirectional actuator

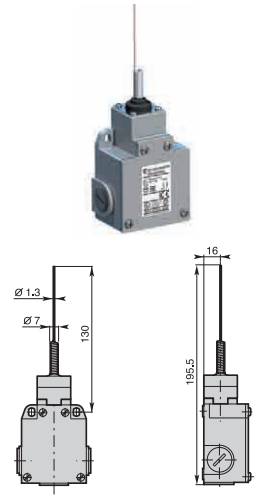


Min. actuating torque 0,18Nm  
 Weight 265 g

### Contact Blocks


Z11 (1NA + 1NC)	CM•E72Z11	CM•E74Z11	CM•E75Z11	CM•E91Z11
X11 (1NA + 1NC)	CM•E72X11	CM•E74X11	CM•E75X11	CM•E91X11
Y11 (1NA + 1NC)	CM•E72Y11	CM•E74Y11	CM•E75Y11	CM•E91Y11
W02 (2NC)	CM•E72W02	CM•E74W02	CM•E75W02	CM•E91W02
W20 (2NA)	CM•E72W20	CM•E74W20	CM•E75W20	CM•E91W20
Z02 (2NC)	CM•E72Z02	CM•E74Z02	CM•E75Z02	CM•E91Z02
X12 (1NA + 2NC)	CM•E72X12	CM•E74X12	CM•E75X12	CM•E91X12
X21 (2NA + 1NC)	CM•E72X21	CM•E74X21	CM•E75X21	CM•E91X21
W03 (3NC)	CM•E72W03	CM•E74W03	CM•E75W03	CM•E91W03
W30 (3NA)	CM•E72W30	CM•E74W30	CM•E75W30	CM•E91W30

### E92 - Multidirectional nylon actuator with stainless steel spring




Min. actuating torque 0,18Nm  
 Weight 265 g

### E93 - Stainless steel spring multidirectional actuator



Min. actuating torque 0,18Nm  
 Weight 270 g

### E99 - Pull action with ring



Min. actuating force 25N  
 Weight 270 g

### Contact Blocks

Z11 (1NO + 1NC)	CM•E92Z11	CM•E93Z11	CM•E99Z11A
X11 (1NO + 1NC)	CM•E92X11	CM•E93X11	CM•E99X11A
Y11 (1NO + 1NC)	CM•E92Y11	CM•E93Y11	CM•E99Y11A
W02 (2NC)	CM•E92W02	CM•E93W02	CM•E99W02A
W20 (2NO)	CM•E92W20	CM•E93W20	CM•E99W20A
Z02 (2NC)	CM•E92Z02	CM•E93Z02	
X12 (1NO + 2NC)	CM•E92X12	CM•E93X12	CM•E99X12A
X21 (2NO + 1NC)	CM•E92X21	CM•E93X21	CM•E99X21A
W03 (3NC)	CM•E92W03	CM•E93W03	CM•E99W03A
W30 (3NO)	CM•E92W30	CM•E93W30	CM•E99W30A

Operation diagrams: page 125 - All dimensions are in mm




# Limit Switches **CM\_M** series


## Metal Casing IP66 - 60 mm. width

### Electrical connection:

**CM1:** three cable inlets for PG 13,5 Cable Gland  
**CM2:** three cable inlets for 1/2" NPT Cable Gland  
**CM5:** three cable inlets for M20 x 1,5 Cable Gland

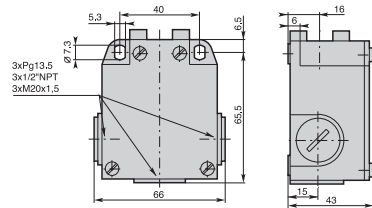


### M13 - Steel roller plunger




Min. actuating force **22N (40N ⊖)**  
 Weight **290 g**

### M14 - Plain steel plunger with dust protection cup



Min. actuating force **30N (45N ⊖)**  
 Weight **280 g**

### M19 - Steel roller plunger with dust protection cup




Min. actuating force **22N (40N ⊖)**  
 Weight **290 g**

### Contact Blocks


<b>Z11</b> (1NO + 1NC)	CM•M13Z11	CM•M14Z11	CM•M19Z11
<b>X11</b> (1NO + 1NC)	CM•M13X11	CM•M14X11	CM•M19X11
<b>Y11</b> (1NO + 1NC)	CM•M13Y11	CM•M14Y11	CM•M19Y11
<b>W02</b> (2NC)	CM•M13W02	CM•M14W02	CM•M19W02
<b>W20</b> (2NO)	CM•M13W20	CM•M14W20	CM•M19W20
<b>Z02</b> (2NC)	CM•M13Z02	CM•M14Z02	CM•M19Z02
<b>X12</b> (1NO + 2NC)	CM•M13X12	CM•M14X12	CM•M19X12
<b>X21</b> (2NO + 1NC)	CM•M13X21	CM•M14X21	CM•M19X21
<b>W03</b> (3NC)	CM•M13W03	CM•M14W03	CM•M19W03
<b>W30</b> (3NO)	CM•M13W30	CM•M14W30	CM•M19W30

### M41 - Ø22 nylon roller lever




Min. actuating torque **0,15Nm (0,30Nm ⊖)**  
 Weight **325 g**

### M42 - Ø22 stainless steel roller lever



Min. actuating torque **0,15Nm (0,30Nm ⊖)**  
 Weight **325 g**

### M43 - Ø22 roller lever with steel ball bearing



Min. actuating torque **0,15Nm (0,30Nm ⊖)**  
 Weight **325 g**

### Contact Blocks

<b>Z11</b> (1NO + 1NC)	CM•M41Z11	CM•M42Z11	CM•M43Z11
<b>X11</b> (1NO + 1NC)	CM•M41X11	CM•M42X11	CM•M43X11
<b>Y11</b> (1NO + 1NC)	CM•M41Y11	CM•M42Y11	CM•M43Y11
<b>W02</b> (2NC)	CM•M41W02	CM•M42W02	CM•M43W02
<b>W20</b> (2NO)	CM•M41W20	CM•M42W20	CM•M43W20
<b>Z02</b> (2NC)	CM•M41Z02	CM•M42Z02	CM•M43Z02
<b>X12</b> (1NO + 2NC)	CM•M41X12	CM•M42X12	CM•M43X12
<b>X21</b> (2NO + 1NC)	CM•M41X21	CM•M42X21	CM•M43X21
<b>W03</b> (3NC)	CM•M41W03	CM•M42W03	CM•M43W03
<b>W30</b> (3NO)	CM•M41W30	CM•M42W30	CM•M43W30


Operation diagrams: page 125 - All dimensions are in mm

# Limit Switches **CM\_M** series


## Metal Casing IP66 - 60 mm. width

### Electrical connection:

- CM1:** three cable inlets for PG 13,5 Cable Gland  
**CM2:** three cable inlets for 1/2" NPT Cable Gland  
**CM5:** three cable inlets for M20 x 1,5 Cable Gland

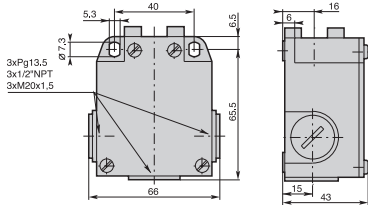


### M44 - Ø50 rubber roller lever




Min. actuating torque 0,15Nm (0,30Nm ⊖)  
 Weight 335 g

### M51 - Adjustable Ø22 nylon roller lever



Min. actuating torque 0,15Nm (0,30Nm ⊖)  
 Weight 345 g

### M52 - Adjustable Ø22 stainless steel roller lever




Min. actuating torque 0,15Nm (0,30Nm ⊖)  
 Weight 345 g

### Contact Blocks


Z11 (1NO + 1NC)	CM•M44Z11	CM•M51Z11	CM•M52Z11
X11 (1NO + 1NC)	CM•M44X11	CM•M51X11	CM•M52X11
Y11 (1NO + 1NC)	CM•M44Y11	CM•M51Y11	CM•M52Y11
W02 (2NC)	CM•M44W02	CM•M51W02	CM•M52W02
W20 (2NO)	CM•M44W20	CM•M51W20	CM•M52W20
Z02 (2NC)	CM•M44Z02	CM•M51Z02	CM•M52Z02
X12 (1NO + 2NC)	CM•M44X12	CM•M51X12	CM•M52X12
X21 (2NO + 1NC)	CM•M44X21	CM•M51X21	CM•M52X21
W03 (3NC)	CM•M44W03	CM•M51W03	CM•M52W03
W30 (3NO)	CM•M44W30	CM•M51W30	CM•M52W30

### M53 - Adjustable Ø22 roller lever with steel ball bearing




Min. actuating torque 0,15Nm (0,30Nm ⊖)  
 Weight 345 g

### M54 - Adjustable Ø50 rubber roller lever



Min. actuating torque 0,15Nm (0,30Nm ⊖)  
 Weight 350 g

### M61 - Nylon actuator with stainless steel spring



Min. actuating torque 0,15Nm  
 Weight 350 g

### Contact Blocks

Z11 (1NO + 1NC)	CM•M53Z11	CM•M54Z11	CM•M61Z11
X11 (1NO + 1NC)	CM•M53X11	CM•M54X11	CM•M61X11
Y11 (1NO + 1NC)	CM•M53Y11	CM•M54Y11	CM•M61Y11
W02 (2NC)	CM•M53W02	CM•M54W02	CM•M61W02
W20 (2NO)	CM•M53W20	CM•M54W20	CM•M61W20
Z02 (2NC)	CM•M53Z02	CM•M54Z02	CM•M61Z02
X12 (1NO + 2NC)	CM•M53X12	CM•M54X12	CM•M61X12
X21 (2NO + 1NC)	CM•M53X21	CM•M54X21	CM•M61X21
W03 (3NC)	CM•M53W03	CM•M54W03	CM•M61W03
W30 (3NO)	CM•M53W30	CM•M54W30	CM•M61W30

Operation diagrams: page 125 - All dimensions are in mm

# Limit Switches **CM\_M** series


## Metal Casing IP66 - 60 mm. width

### Electrical connection:


**CM1:** three cable inlets for PG 13,5 Cable Gland

**CM2:** three cable inlets for 1/2" NPT Cable Gland

**CM5:** three cable inlets for M20 x 1,5 Cable Gland

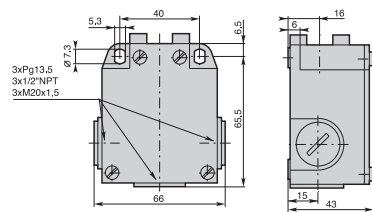


### M62 - Stainless steel spring actuator

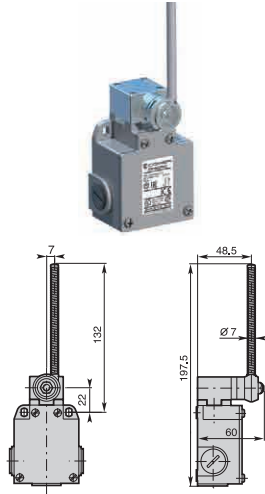


Min. actuating torque **0,15Nm**  
Weight **350 g**

### M71 - Adjustable Ø3 stainless steel rod lever

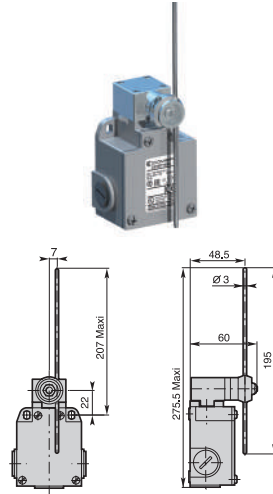

Min. actuating torque **0,15Nm (0,30Nm ⊖)**  
Weight **350 g**

### M72 - Adjustable Ø6 nylon rod lever

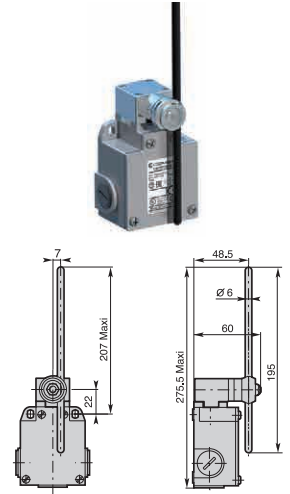


Min. actuating torque **0,15Nm (0,30Nm ⊖)**  
Weight **350 g**

### Contact Blocks


Z11 (1NO + 1NC)	CM•M62Z11	CM•M71Z11	CM•M72Z11
X11 (1NO + 1NC)	CM•M62X11	CM•M71X11	CM•M72X11
Y11 (1NO + 1NC)	CM•M62Y11	CM•M71Y11	CM•M72Y11
W02 (2NC)	CM•M62W02	CM•M71W02	CM•M72W02
W20 (2NO)	CM•M62W20	CM•M71W20	CM•M72W20
Z02 (2NC)	CM•M62Z02	CM•M71Z02	CM•M72Z02
X12 (1NO + 2NC)	CM•M62X12	CM•M71X12	CM•M72X12
X21 (2NO + 1NC)	CM•M62X21	CM•M71X21	CM•M72X21
W03 (3NC)	CM•M62W03	CM•M71W03	CM•M72W03
W30 (3NO)	CM•M62W30	CM•M71W30	CM•M72W30

### M73 - Adjustable Ø3 fiberglass rod lever

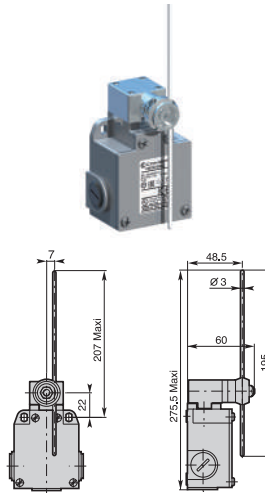


Min. actuating torque **0,15Nm (0,30Nm ⊖)**  
Weight **350 g**

### M74 - Adjustable Ø6 fiberglass rod lever

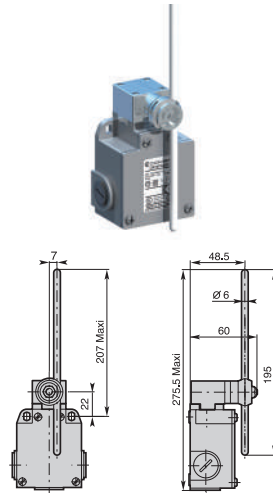

Min. actuating torque **0,15Nm (0,30Nm ⊖)**  
Weight **350 g**

### M75 - Adjustable 3x3 square steel rod lever

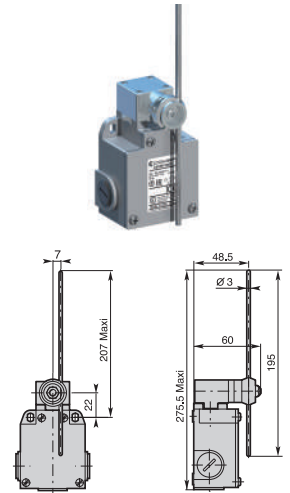

Min. actuating torque **0,15Nm (0,30Nm ⊖)**  
Weight **350 g**

### Contact Blocks

Z11 (1NO + 1NC)	CM•M73Z11	CM•M74Z11	CM•M75Z11
X11 (1NO + 1NC)	CM•M73X11	CM•M74X11	CM•M75X11
Y11 (1NO + 1NC)	CM•M73Y11	CM•M74Y11	CM•M75Y11
W02 (2NC)	CM•M73W02	CM•M74W02	CM•M75W02
W20 (2NO)	CM•M73W20	CM•M74W20	CM•M75W20
Z02 (2NC)	CM•M73Z02	CM•M74Z02	CM•M75Z02
X12 (1NO + 2NC)	CM•M73X12	CM•M74X12	CM•M75X12
X21 (2NO + 1NC)	CM•M73X21	CM•M74X21	CM•M75X21
W03 (3NC)	CM•M73W03	CM•M74W03	CM•M75W03
W30 (3NO)	CM•M73W30	CM•M74W30	CM•M75W30

Operation diagrams: page 125 - All dimensions are in mm