


**HENGSTLER**

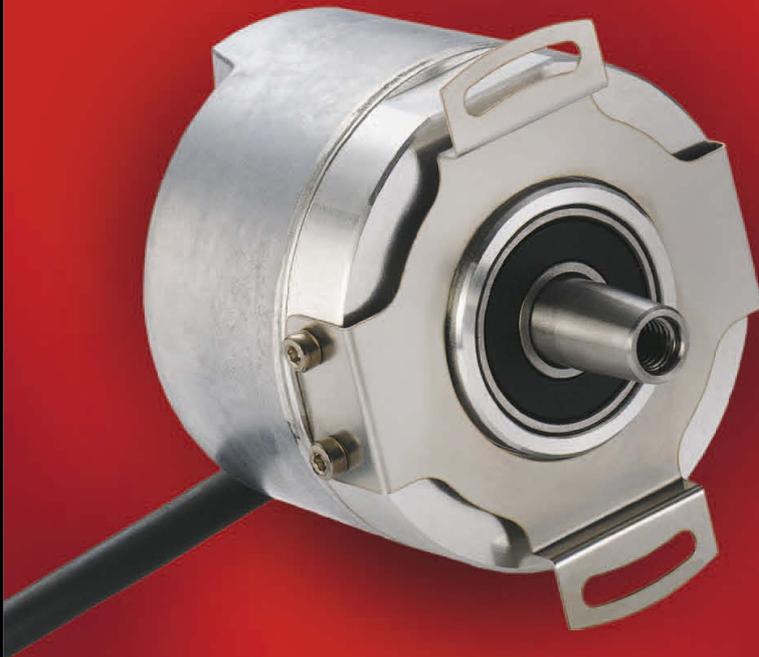

## **Encoders**

- **Incremental**
- **Absolute**
- **Motor Feedback Systems**

Innovative products from your competent partner. Worldwide


## Hengstler Products

**Encoders**

Absolute Encoders  
 ACURO drive and ACURO industry,  
 Incremental Encoders,  
 Ex-proof and stainless steel versions,  
 Bus Encoders

**Industrial Counting and Control Components**

Starting from mini-counters  
 up to ambitious control counters,  
 multi-function counters, counters with  
 interface, position indicators,  
 timers, tachometers

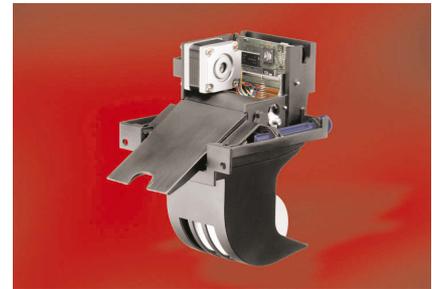**Printers and Cutters**

Printer solutions e.g. applications in the  
 sector of info points, ticket dispensers,  
 cash dispensers, POS systems, modular  
 thermal and needle printers, accessories  
 such as winders and cutters

**Relay technology**

Main focus is the worldwide most  
 versatile product range of safety relays  
 - relays with guided contact sets -  
 Furthermore:  
 bistable relays, insulation relays,  
 high-voltage relays, mini switching relays

## Further Danaher Brands of the Sensors & Controls Group

Dyapar™

Eagle Signal™

ENM™

Harowe™

Namco™

NorthStar™

Partlow™

Veeder-Root™

West™

# Contents

Seite

## GENERAL ASPECTS

- Variety and competence - HENGSTLER today 2
- Our service for you 5
- HENGSTLER produces worldwide 6

## PRODUCTS

- Products in this catalogue 7
- Applications 33

## INCREMENTAL ENCODERS

- Overview of product range 37
- Industrial encoder types with full shaft 45
- Industrial encoder types with hollow shaft 60
- Economy encoders 79
- Encoder in explosion-proof versions and stainless steel versions 90
- Sine-wave encoders 95

## ABSOLUTE ENCODERS Single and Multiturn

- Overview of product range 100
- ACURO industry 107
  - BiSS/ SSI
  - Field bus systems
  - Parallel
- Encoder in explosion-proof versions and stainless steel versions 150

## MOTOR FEEDBACK SYSTEMS

### For Miniature DC & Stepper Motors

- Overview of product range 164
- Incremental kit encoders 175

### For Asynchronous & DC Motors

- Hollow shaft encoders 184

### For AC Synchronous & BLDC Motors

- Comcoders 186
- Absolute encoders 216
- Sine-wave encoders 222
- Resolvers 225

## ACCESSORIES

- Position indicator for absolute encoders 228
- Encoder with shock module 231
- Flexible couplings 232
- Mounting elements 235
- Connectors, cables 239
- Measuring wheels 245

## TECHNICAL BASICS

- Encoders basics 247
  - Output signals incremental encoders, maximum speed, protection class, examples of flange mounting
- Basics of incremental encoders - output 252
- Basics of sine-wave encoders 257
- Basics of absolute encoders ACURO - interfaces 259
- Glossary of technical terms 281

## CONTACT

- Sales and Service international 288

## OTHERS

- Terms and Conditions 291

General  
aspects



The Hengstler headquarters in Aldingen.

## Good reasons for working with Hengstler

The Hengstler headquarters are located in Aldingen, in South-West Germany, on the edge of the Black Forest - a region famous for its industrial pioneers and inventors. The foundations for the Hengstler company were laid by one of these inventors, Johannes Hengstler, who, in 1846, set up a workshop which was later to become the center of the worldwide Hengstler group.

### Better by competence

This catalog provides proof of our competence in the business field of encoders - a comprehensive program characterized (as are all Hengstler products) by state-of-the-art technology, excellent design and highest standards of quality and reliability.

**Hengstler - you can count on us.**



The workshop was started for the manufacture of clock springs; today, Hengstler products range from miniature counters to absolute hollow shaft encoders.

All technical data and information contained herein, including the graphics, were collected and compiled with the utmost care.

This brochure provides information on products and accessories, which, however, does not constitute any guarantee for technical data or features. The user of these products must

determine himself the suitability of the product for the intended use.

All technical data is subject to alterations. For questions of technical nature or regarding prices and delivery, please contact our company headquarters or field service employees.

## Customer Orientation

- Hengstler is never far away - wherever you are in the world
- Application-specific assistance
- Customer-oriented manufacturing (one-piece-flow)
- Fair price/performance ratio
- Short delivery times and a high degree of availability
- 48-hour repair service

## Quality


- High-quality materials in accordance with VDE (Association of German Electrotechnical Engineers)
- UL, CL- and TÜV approvals
- DQS-certified to ISO 9001

## Variety

- Hengstler offers a wide range of components for counting, controlling, indicating, measuring, switching and printing
- Get it all from one source!
- Benefit from numerous variants - for added flexibility.

## Experience

- Hengstler was founded in 1846 and has been manufacturing counters since 1926, printers since 1970, sensors since 1987, relays since 1983...

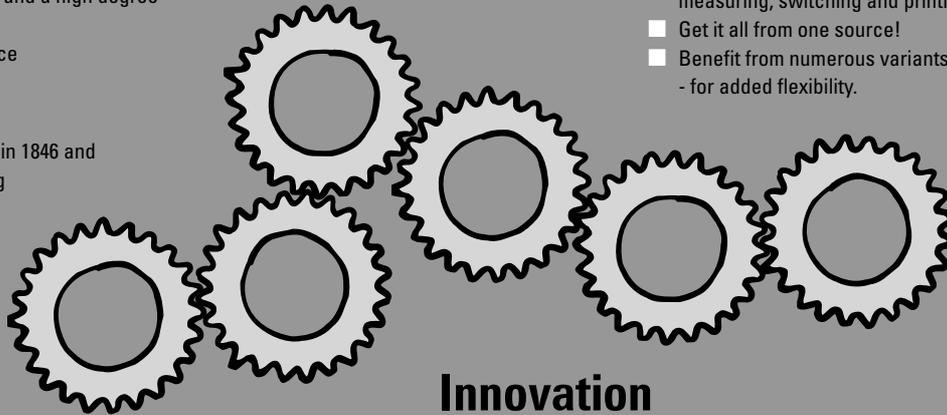

## Competence

- Vast know-how in the fields of development, manufacturing and sales marketing
- Assistance and support are provided by specialists.

## Innovation

- Product development is based on state-of-the-art technology and highly advanced processes.
- Our products are setting the pace - around the globe
- We offer communicative products with state-of-the-art bus technology.

## Successfull with Hengstler

### Innovation at an international level

Our numerous branches and representatives in Europe, America and Asia have made us a truly international enterprise. Our availability around the globe is, of course, a great benefit for our customers - the next Hengstler contact is never far away.

Our sound footing in all parts of the world also has a positive effect on our product know-how. Findings from worldwide research programs provide a pool of information from which, in turn, the material for the carefully directed, overall technological concept is won. These findings form the practice-oriented basis for ongoing innovation and efficiency in all corporate sectors.

The pace of innovation is getting faster and faster in all sectors of technology. Only those who are able to follow or even set this pace will continue to be competitive. Strong, reliable partners are needed to help you cope with these new demands. You need partners whose top priority is added product value/customer value, customer-orientation and high quality.

And taking all this into account, Hengstler is your partner of choice.

Hengstler is a leading European manufacturer in the field of industrial counting and control components, e.g. counters, encoders, industrial and temperature controllers, as well as relays.

The product range is completed by printers and cutters, with Hengstler being the greatest manufacturer for cutters in Europe.

## Hengstler: your Technology Partner

One of our particular strengths is the project management of custom applications. The basis for this is our wide experience gained over many years in the fields of electromechanics, mechanics, pneumatics and electronics which is, of course, mirrored in our product program. Hengstler offers its customers complete support starting at the project planning and development right through to the final product. At present we are handling complex projects in the field of pneumatics and printers for well-known companies, such as Bosch, Festo, IBM and Siemens.

**Talk to Hengstler.**  
**We can offer solutions.**

# Encoders from Hengstler - Variety and Class

# HENGSTLER

## The program range

### Incremental Encoders

- Industrial types
- With hollow shaft
- With hollow shaft in high temperature version for motor applications
- Economy types
- Stainless steel encoders

### Absolute Encoders

- Singleturn
- Multiturn
- Interfaces: parallel, SSI, CAN, CAN open, Profibus DP, InterBus
- programmable versions

### Ex-protected Encoders Stainless steel versions

Reliable HENGSTLER components such as counters, sensors and printers are perfectly harmonized and thus guarantee simple installation and safe operation.

## Technology and Flexibility

Monolithic integrated OPTOASICS reliably replace up to 200 SMD components. On the base of our building block system we can offer customers more than 1 million different shaft encoder versions from 4 different building classes.

The choice is yours :

- **Flanges and shafts** with different connection dimensions and diameters from 6 to 76 mm
- **Resolutions** between 1 and 10,000, for up to 40,000 measuring steps
- **Output drivers** for up to 200 m long cables
- **Covers, cables and connectors** in different lengths and versions
- **Protection classes** up to IP 67


## Short delivery times and high availability

Hengstler encoders are manufactured with state of the art production know how. Every single encoder is built according to customer specification, in series quality and in one piece flow. This is why we can handle your wishes very flexibly and at the same time offer you very short delivery times.

## The Encoder Sales and Service Team

Excellent products are only one part of the Hengstler performance. The encoder team is always at your service to analyse your problems, advise you according to your application and to offer you customized solutions.

**We are usually just around the corner from your location - so contact us whenever your topic is "Encoders".**

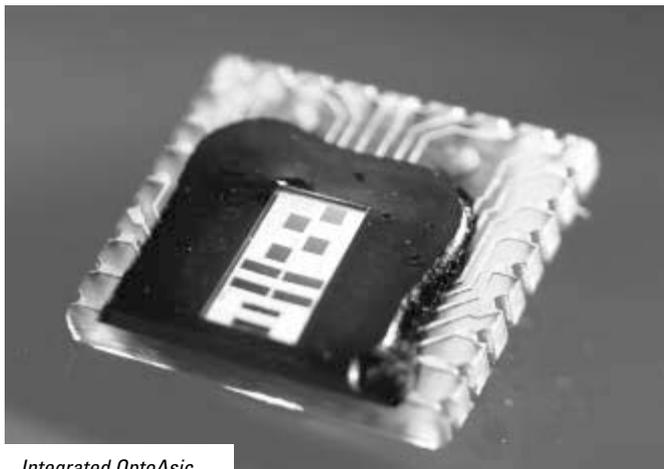

*Integrated OptoASIC*

### Advantages for you:

- Flexibility due to the modular system
- More safety on account of the optoasics, possible faults eliminated
- Outputs short-circuit proof and overload protected over the whole temperature range
- Self-monitoring and fault detection
- Long service life
- Very high protection against electromagnetic interference

## Customer Service

– always remains close to you – thanks to our extensive sales & distribution network. Please contact your local Hengstler distributor, addresses see chapter “Contact” (page 288).

**Talk to Hengstler.**  
**We offer solutions.**

### Customer Advantages

- **Personal customer service**
- **Many years of experience**

## Word-wide Representation

You will always find a friendly contact at Hengstler – wherever you are in the world. Our experienced, competent partners are familiar with your branch – just get in touch. Please contact your local Hengstler distributor, addresses see chapter “Contact” (page 288).

### Customer Advantages

- **We´re there for you - wherever you are - worldwide**

## Technical Support

If you should have any technical questions concerning your product selection or specific application – get fast and competent help. See chapter “Contact” (page 288).

### Customer Advantages

- **Quick response to your technical queries**

## Always on the safe side

Quality and reliability of our products are our top priority. Our quality management system is DQS-certified to DIN EN ISO 9001. Reg. No. 1540-01.

## Order Service

You can reach our team to place your order by phone between 8.00 am and 5.00 pm:  
**Phone +49 800 - 436 47 85 37 or**  
**Phone +49 7424-89 201.**

Orders may also be placed 24 hours by  
**Fax +49 7424-89 500.**

### Customer Advantages


- **No minimum order quantities or extra charge for small order sizes**
- **At any time reachable for your orders**

Your order will be processed immediately after receipt. If any question remains regarding your order, we will call you back.

Please contact us if you require a quotation for higher quantities, special versions or delivery times. If you can´t find your desired product in our catalogue, don´t hesitate to let us know - we would be glad to help you.

Please visit as well our online store at [www.hengstler.com](http://www.hengstler.com).

## HENGSTLER produces worldwide

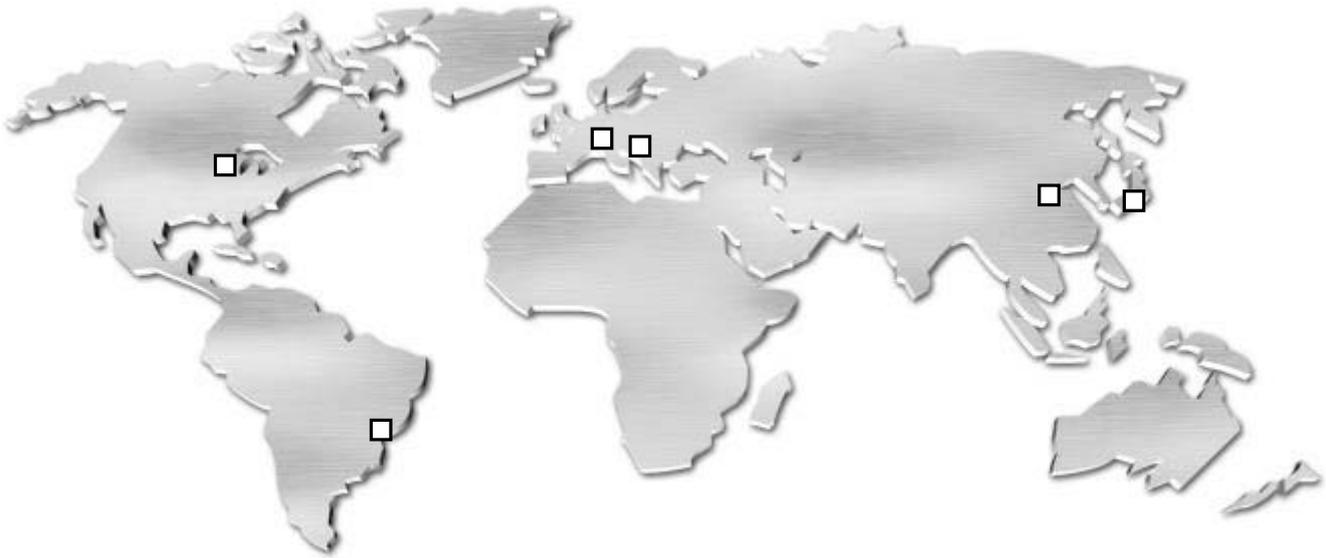

**Germany - Hengstler GmbH**  
Aldingen



**Slovakia - Hengstler sro**  
Kezmarok



**USA - Danaher Controls**  
Gurnee, Illinois



**China - Danaher ICG China**  
Tianjin



**Brasil - Veeder Root do Brasil**  
Sao Paulo



**Japan - Danaher ICG Japan Co.**  
Osaka

# Incremental Encoders - Industrial types

## Solid shaft



Type	RI 30	RI 36	RI 58
<b>Special features</b>	<ul style="list-style-type: none"> <li>■ small encoder for industrial applications</li> <li>■ low power consumption</li> <li>■ high immunity to interference</li> <li>■ cable lengths up to 100 m</li> <li>■ suitable for high pulse frequencies</li> <li>■ high level of protection</li> <li>■ applications, e.g. CNC machine, handling systems, motors, medical technology, textile machinery</li> </ul>	<ul style="list-style-type: none"> <li>■ small industrial encoder for high numbers of pulses</li> <li>■ high operating safety</li> <li>■ applications, e.g. CNC axles, machine tools, robots, special machinery, high-speed winding machines</li> </ul>	<ul style="list-style-type: none"> <li>■ universal industrial encoder</li> <li>■ up to 10 000 pulses</li> <li>■ protection class up to IP 67</li> <li>■ operating temperature up to 100°C</li> <li>■ suitable for high shock loads</li> <li>■ applications e.g. machine tools, CNC axles, packaging machinery, motors, drives, injection moulding machines, sawing machines, textile machinery</li> </ul>
<b>Number of pulses</b>	5 ... 1500	5 ... 3600	1 ... 10000
<b>Technical Data - mechanical</b>			
Flange	S = synchro flange, R = pilot flange	S = synchro flange, R = pilot flange	S = synchro flange, R = pilot flange G, Q = square flange, M = Synchro clamping flange
Shaft diameter	5 mm	6 / 6.35 mm	6 / 6.35 / 7 / 10 / 9.52 / 12 mm
Absolute max. shaft load radial/axial	10/5 N	10/5 N	Ø 12 mm - 80/60 N Ø 7 ... 10 mm - 60/40 N Ø 6 mm/6.35 mm - 40/20 N
Absolute max. speed	10 000 min <sup>-1</sup>	10 000 min <sup>-1</sup>	10 000 min <sup>-1</sup>
Torque	≤ 0.2 Ncm	≤ 0.3 Ncm	≤ 0.5 Ncm
Protection class housing/bearing	IP 64/64	IP 64/64	IP 65/64, IP 67/67
General design	as per DIN VDE 0160, protection class III	as per DIN VDE 0160, protection class III	as per DIN VDE 0160, protection class III
Operating temperature	-10 ... +70 °C	-10 ... +70 °C	RI 58-O: -10 ... +70 °C/ RI 58-T: -25 ... +100 °C
Connection	Cable axial/radial	Cable or connector axial/radial	Cable or connector axial/radial
Size	Ø 30 mm	Ø 36 mm	Ø 58 mm, square fl.=63.5 mm/80mm
Weight approx.	60 g	80 g	300 g
<b>Technical Data - electrical</b>			
Output	RS 422/push-pull	RS 422/push-pull	RS 422/push-pull/ push-pull complementary
Supply voltage (SELV)	DC 5V/DC 10 - 30 V	DC 5V/DC 10 - 30 V	DC 5V/DC 10 - 30 V
Max. current w/o load	40 mA (DC 5V), 30 mA (DC 24 V), 60 mA (DC 10 V)	40 mA (DC 5V), 30 mA (DC 24 V), 60 mA (DC 10 V)	40 mA (5VDC), 30 mA (DC 24 V), 60 mA (10VDC)
Max. pulse frequency	300 kHz (RS 422) 200 kHz (push-pull)	300 kHz (RS 422) 200 kHz (push-pull)	300 kHz (RS 422) 200 kHz (push-pull)
Output load	RS 422: ±30 mA push-pull with short circuit protection: 30 mA (DC 10 - 30 V)	RS 422: ±30 mA push-pull with short circuit protection: 30 mA (DC 10 - 30 V)	RS 422: ±30 mA push-pull with short circuit protection: 30 mA (DC 10 - 30 V)
Alarm output	NPN-O.C. 5 mA	NPN-O.C. 5 mA	NPN-O.C. 5 mA
Pulse shape	Square wave	Square wave	Square wave
Pulse duty factor	1 : 1	1 : 1	1 : 1
Page	45	49	52

# Incremental Encoders - Industrial types

## Hollow shaft



Type	RI 36-H	RI 58-H	RI 58-D
<b>Special features</b>	<ul style="list-style-type: none"> <li>■ miniature industry encoder for high numbers of pulses</li> <li>■ short mounting depth</li> <li>■ easy mounting procedure</li> <li>■ applications, e.g. motors, machine tools, packaging machines, robots, automated SMD equipment</li> </ul>	<ul style="list-style-type: none"> <li>■ through hollow shaft</li> <li>■ high accuracy due to integrated coupling</li> <li>■ secure shaft mounting</li> <li>■ applications e.g. textile machinery, motors, drives, copiers</li> </ul>	<ul style="list-style-type: none"> <li>■ direct mounting without coupling</li> <li>■ flexible hollow shaft concept up to 14 mm</li> <li>■ through hollow shaft or as end shaft (blind shaft)</li> <li>■ operating temperature up to 100 °C (RI 58 TD)</li> <li>■ applications, e.g. positioning drives, motors</li> </ul>
<b>Number of pulses</b>	5 ... 3600	1 ... 5000	1 ... 5000
<b>Technical Data - mechanical</b>			
Flange or shaft fixing	Clamping shaft (one side open) with front clamping ring; hubshaft with tether as torque support	S = synchro flange	E = synchro flange with blind shaft F, D, H= synchro flange with clamping shaft
Shaft diameter	Hollow shaft 4 / 6 / 8 / 10 mm	Hollow shaft 10 mm/12 mm	Hollow shaft 10 mm/12 mm/14 mm
Absolute max. shaft load	misalignment radial ±0.15 mm, misalignment axial ±0.5 mm,	misalignment axial ±0,4 mm misalignment parallel 0,4 mm misalignment angular 1°	
Absolute max. speed	10 000 min <sup>-1</sup>	3 000 min <sup>-1</sup>	6 000 min <sup>-1</sup>
Torque	≤ 0.3 Ncm	≤ 2 Ncm	≤ 1.7 Ncm
Protection class housing/bearing	IP 64/64	IP 64/64	IP 65/64
General design	as per DIN VDE 0160, protection class III	as per DIN VDE 0160, protection class III	as per DIN VDE 0160, protection class III
Operating temperature	-10 ... +70 °C	-10 ... +70 °C	-10 ... +70 °C (Option: -25 .. +100 °C)
Connection	Cable axial/radial	Cable radial	Cable or connector radial
Size	Ø 36 mm	Ø 58 mm	Ø 58 mm
Weight approx.	80 g	210 g	170 g
<b>Technical Data - electrical</b>			
Output	RS 422 / push-pull / push-pull complementary	RS 422 / push-pull / push-pull complementary	RS 422 / push-pull / push-pull complementary
Supply voltage (SELV)	DC 5 V / DC 10 - 30 V	DC 5 V / DC 10 - 30 V	DC 5 V / DC 10 - 30 V
Max. current w/o load	40 mA (DC 5 V), 30 mA (DC 24 V), 60 mA (DC 10 V)	40 mA (DC 5 V), 30 mA (DC 24 V), 60 mA (DC 10 V)	40 mA (DC 5 V), 30 mA (DC 24 V), 60 mA (DC 10 V)
Max. pulse frequency	300 kHz (RS 422) 200 kHz (push-pull)	300 kHz (RS 422) 200 kHz (push-pull)	300 kHz (RS 422) 200 kHz (push-pull)
Output load	RS 422: ±30 mA push-pull with short circuit protection: 30 mA (DC 10 - 30 V)	RS 422: ±30 mA push-pull with short circuit protection: 30 mA (DC 10 - 30 V)	RS 422: ±30 mA push-pull with short circuit protection: 30 mA (DC 10 - 30 V)
Alarm output	NPN-O.C. 5 mA	NPN-O.C. 5 mA	NPN-O.C. 5 mA
Pulse shape	Square wave	Square wave	Square wave
Pulse duty factor	1 : 1	1 : 1	1 : 1
<b>Page</b>	60	63	66

# Incremental Encoders - Industrial types

## Hollow shaft



Type	RI 76 TD	RI 80-E
<b>Special features</b>	<ul style="list-style-type: none"> <li>■ through hollow shaft</li> <li>■ shaft diameters 15 to 42 mm</li> <li>■ external diameter only 76 mm</li> <li>■ simple installation with clamping ring front or rear</li> <li>■ operating temperature up to 100 °C</li> <li>■ applications e.g. motors, printing machines, elevators</li> </ul>	<ul style="list-style-type: none"> <li>■ Incremental Output</li> <li>■ 30...45 mm hollow shaft</li> <li>■ Rugged mechanical design</li> <li>■ Unbreakable disc</li> <li>■ Integrated diagnostic system</li> <li>■ Wide voltage range 5 ... 30 V</li> </ul>
<b>Number of pulses</b>	1 ... 10 000	1024, 2048, 4096 other number of pulses on request
<b>Technical Data - mechanical</b>		
Shaft fixation	Clamping ring front or rear	Keyway, set screw
Coupling	stator coupling (hubshaft with tether)	Spring tether (single, double)
Shaft diameter	Hollow shaft 15 ... 42 mm	
Max. speed	6 000 min <sup>-1</sup> (depends on version)	3 600 min <sup>-1</sup> (IP50), 1 500 min <sup>-1</sup> (IP64)
Torque	3 ... 10 Ncm (depends on version)	
Protection class housing/bearing	IP 50/40 (Option: IP 65/64)	IP50, IP64
General design	as per DIN EN 61010 protection class III	as per DIN EN 61010, protection class III, Contamination level 2, over voltage class II
Operating temperature	-25 ... +100 °C	-20 ... +70 °C
Connection	Cable radial	Sub-D 15p. / cable, radial
Size	Ø 76 mm	
Weight approx.	320 ... 580 g (depends on version)	1 000 g
<b>Technical Data - electrical</b>		
Output	RS 422 / push-pull / push-pull complementary	RS 422 / push-pull / push-pull complementary
Supply voltage (SELV)	DC 5 V / DC 10 - 30 V	DC 5 V ±10% or DC 10 - 30 V
Max. current w/o load	40 mA (DC 5 V), 30 mA (DC 24 V), 60 mA (DC 10 V)	60 mA (DC 5 V), 60 mA (DC 10 V), 35 mA (DC 24 V)
Max. pulse frequency	300 kHz (RS 422) 200 kHz (push-pull)	600 kHz (RS 422) 200 kHz (push-pull)
Output load	RS 422: ±30 mA push-pull with short circuit protection: 30 mA (DC 10 - 30 V)	RS 422: ±30 mA push-pull with short circuit protection: 40 mA (DC 10 - 30 V)
Alarm output	NPN-O.C. 5 mA	NPN-O.C. 5 mA
Pulse shape	Square wave	Square wave
Pulse duty factor	1 : 1	1 : 1
Page	72	76

## Incremental Encoders - Economy types



Type	PC 9 / PC 9S
<b>Special features</b>	<ul style="list-style-type: none"> <li>■ Provides digital control inputs from operators's panel</li> <li>■ Bidirectional squarewave signal outputs</li> <li>■ Up to 512 increments</li> <li>■ Continuous and reversible rotation</li> <li>■ Noncontacting</li> <li>■ Operating temperature -40 ... 100 °C</li> </ul>
<b>Number of pulses</b>	100 ... 512
<b>Technical Data - mechanical</b>	
Absolute max. shaft load	1/8" Shaft: 4 N axial, 27 N radial 1/4" Shaft: 4 N axial, 4 N radial
Moment of inertia	0.20 gcm <sup>2</sup>
Operating temperature	-40 ... +100 °C
Storage temperature	-50 ... +125 °C
Relative humidity	90 %, non-condensing
Connection	PC9: 10 pole header, (Accessory: 30 cm ribbon cable with connector) PC9S: 5 pole header, (Accessory: 30 cm cable with connector)
<b>Technical Data - electrical</b>	
Code	Inkremental, optical
Phasing	90° ±18° electrical
Symmetry	180° ±18° electrical
Index pulse width	90° ±36° electrical
Supply voltage	DC 5 V ±10 %
Supply current	10 mA, typical
Standby current	max. 50 µA (PC9 only)
Output signals	min. 2.5 V high (V <sub>OH</sub> ) max. 0.5 V low (V <sub>OL</sub> )
Output current	PC9: 3 mA sink/source (25 °C), 2 mA (100 °C) PC9S: 6 mA sink/source (25 °C), 4 mA (100 °C)
Max. pulse frequency	200 kHz
Pulse shape	Square wave
Pulse duty factor	1:1
<b>Page</b>	79

## Incremental Encoders - Economy types



Type	RI 32	RI 38	RI 41
<b>Special features</b>	<ul style="list-style-type: none"> <li>■ economy encoder for small devices</li> <li>■ long life due to ball bearings</li> <li>■ low torque</li> <li>■ application e.g. laboratory devices, fitness machines, crimping machines, tampon printing machines, small grinding machines</li> </ul>	<ul style="list-style-type: none"> <li>■ encoder for universal mounting due to front or rear fixing</li> <li>■ long life due to ball bearings</li> <li>■ low torque</li> <li>■ applications e.g. small motors, laboratory devices, labelling devices, plotters, length measuring machines</li> </ul>	<ul style="list-style-type: none"> <li>■ economy encoder</li> <li>■ high mechanical life</li> <li>■ applications e.g. small motors, graphic machines, desktop robots, wood working machines</li> </ul>
<b>Number of pulses</b>	5 ... 1500	5 ... 1024	5 ... 3600
<b>Technical Data - mechanical</b>			
Flange	R = pilot flange	Q = square flange	R = pilot flange
Shaft diameter	5 mm/6 mm	6 mm	6 mm
Absolute max. shaft load	radial 10 N, axial 5 N	radial 10 N, axial 5 N	radial 10 N, axial 5 N
Absolute max. speed	6 000 min <sup>-1</sup>	10 000 min <sup>-1</sup>	10 000 min <sup>-1</sup>
Torque	≤ 0.05 Ncm	≤ 0.2 Ncm	
Protection class housing/bearing	IP 50/40	IP 50/40	IP 50/40
General design	as per DIN VDE 0160, protection class III	as per DIN VDE 0160, protection class III	as per DIN VDE 0160, protection class III
Operating temperature	-10° ... +60 °C	-10° ... +60 °C	-10° ... +70 °C
Connection	Cable radial/axial	Cable radial	Cable radial
Size	Ø 30 mm	39 x 39 mm	Ø 40 mm
Weight approx.	50 g	60 g	60 g
<b>Technical Data - electrical</b>			
Output	push-pull	push-pull	push-pull
Supply voltage (SELV)	DC 5V or DC 10 - 30 V	DC 5V or DC 10 - 30 V	DC 5V or DC 10 - 30 V
Max. current w/o load	40 mA (DC 5V), 30 mA (DC 24 V)	40 mA (DC 5V), 30 mA (DC 24 V)	40 mA (DC 5V), 30 mA (DC 24 V)
Max. pulse frequency	300 kHz (DC 5V) 200 kHz (DC 10 - 30 V)	300 kHz (DC 5V) 200 kHz (DC 10 - 30 V)	300 kHz (DC 5V) 200 kHz (DC 10 - 30 V)
Output load	push-pull with short circuit protection: 10 mA (DC 5V), 30 mA (DC 10 - 30 V)	push-pull with short circuit protection: 10 mA (DC 5V), 30 mA (DC 10 - 30 V)	push-pull with short circuit protection: 10 mA (DC 5V), 30 mA (DC 10 - 30 V)
Alarm output	NPN-O.C. 5 mA	NPN-O.C. 5 mA	NPN-O.C. 5 mA
Pulse shape	Square wave	Square wave	Square wave
Pulse duty factor	1 : 1	1 : 1	1 : 1
Page	82	84	86

## Incremental Encoders - Economy types



Type	RI 42
<b>Special features</b>	<ul style="list-style-type: none"> <li>■ economy encoder</li> <li>■ high protection IP 65</li> <li>■ push-pull or NPN-O.C.</li> <li>■ applications, e.g. textile machinery</li> </ul>
<b>Number of pulses</b>	5 ... 1 024
<b>Technical Data - mechanical</b>	
Flange	R = pilot flange
Shaft diameter	6 mm
Absolute max. shaft load	radial 10 N, axial 5 N
Absolute max. speed	10 000 min <sup>-1</sup>
Torque	≤ 1 Ncm
Protection class housing/bearing	IP 65/64
General design	as per DIN VDE 0160, protection class III
Operating temperature	0° ... +60 °C
Connection	Cable axial
Size	Ø 40 mm
Weight approx.	75 g
<b>Technical Data - electrical</b>	
Output	push-pull / push-pull complementary / NPN-O.C.
Supply voltage (SELV)	DC 5 V / DC 10 - 30 V / DC 10 - 24 V
Max. current w/o load	40 mA (DC 5 V), 30 mA (DC 24 V)
Max. pulse frequency	300 kHz (5 V) 200 kHz (DC 10 - 30 V) 50 kHz (DC 10 - 24 V)
Output load	push-pull with short circuit protection: 10 mA (DC 5 V), 30 mA (DC 10 - 30 V)
Alarm output	NPN-O.C. 5 mA
Pulse shape	Square wave
Pulse duty factor	1 : 1
Page	88

# Incremental EX and Stainless Steel Encoders



Type	RX 70-TI / RX 71-TI (Stainless)	RI 59
<b>Special features</b>	<ul style="list-style-type: none"> <li>■ explosion-proof according to EX II 2 G/D EEX d IIC T6/T4</li> <li>■ highest operating safety</li> <li>■ applications e.g. lacquering lines, surface processing machines, filling plants, mixing machines, silo systems</li> </ul>	<ul style="list-style-type: none"> <li>■ stainless steel encoder with high degree of protection</li> <li>■ high corrosion resistance</li> <li>■ suitable for use in food production</li> <li>■ applications e.g. packaging machinery, filling plants, washing systems, mixing machines</li> </ul>
<b>Number of pulses</b>	1 ... 10 000	1 ... 10 000
<b>Technical Data - mechanical</b>		
Flange	K = clamping flange	Q = square flange
Shaft diameter	10 mm	9.52 mm / 10 mm
Max. shaft load	radial 100 N, axial 40 N	radial 60 N, axial 40 N
Max. speed	6 000 min <sup>-1</sup> (T6), 10 000 min <sup>-1</sup> (T4)	10 000 min <sup>-1</sup>
Torque	≤ 0.5 Ncm	≤ 0.5 Ncm
Protection class housing/bearing	IP 65/64	IP 67/67
General design	as per DIN VDE 0160, protection class III	as per DIN VDE 0160, protection class III
Operating temperature	-10 ... + 40 °C	-10 ... + 70 °C
Connection	Cable axial	Cable radial
Size	Ø 70 mm	Ø 58 mm, square flange = 63.5 mm
Weight approx.	1400 g	620 g
<b>Technical Data - electrical</b>		
Output	RS 422/push-pull/push-pull complementary	RS 422/push-pull/push-pull complementary
Supply voltage (SELV)	DC 5 V/DC 10 - 30 V	DC 5 V/DC 10 - 30 V
Max. current w/o load	40 mA (DC 5 V), 30 mA (DC 24 V), 60 mA (DC 10 V)	40 mA (DC 5 V), 30 mA (DC 24 V), 60 mA (DC 10 V)
Max. pulse frequency	300 kHz (RS 422) 200 kHz (push-pull)	300 kHz (RS 422) 200 kHz (push-pull)
Output load	RS 422: ±30 mA push-pull with short circuit protection: 30 mA (DC 10 - 30 V)	RS 422: ±30 mA push-pull with short circuit protection: 30 mA (DC 10 - 30 V)
Alarm output	NPN-O.C. 5 mA	NPN-O.C. 5 mA
Pulse shape	Square wave	Square wave
Pulse duty factor	1 : 1	1 : 1
Pulse width error	± max. 25° electrical	± max. 25° electrical
Page	90	93

## Incremental Sine-Wave Encoders



Type	RIS 58-0	RIS 58-H
<b>Special features</b>	<ul style="list-style-type: none"> <li>■ Harmonic distortion less than 1 %</li> <li>■ Extended temperature range, -40° up to +100 °C</li> <li>■ 500 kHz sine-wave incremental signal frequency response</li> <li>■ Self-monitoring and error compensation</li> <li>■ Secure against short-circuit and overload</li> </ul>	<ul style="list-style-type: none"> <li>■ Harmonic distortion less than 1 %</li> <li>■ Extended temperature range, -40° up to +100 °C</li> <li>■ 500 kHz sine-wave incremental signal frequency response</li> <li>■ Self-monitoring and error compensation</li> <li>■ Secure against short-circuit and overload</li> </ul>
<b>Number of pulses</b>	1 000, 1 024, 2 048, 2 500	1 000, 1 024, 2 048, 2 500, 5 000
<b>Technical Data - mechanical</b>		
Shaft diameter	6 mm	10 mm, 12 mm hollow shaft
Absolute max. shaft load	radial 60 N/ axial 40 N	
Balance tolerances		axial ±1.5 mm, radial ±0.2 mm
Max. speed	12 000 min <sup>-1</sup>	12 000 min <sup>-1</sup>
Torque	≤ 1 Ncm	≤ 1 Ncm
Protection (EN 60529)	Bearing IP 64, Housing IP 65	Bearing IP 64, Housing IP 65
General design	as per DIN EN 61010-1	as per DIN EN 61010-1
Operating temperature	-40 ... +100 °C	-40 ... +100 °C
Vibration (IEC 68-2-6)	≤ 100 m/s <sup>2</sup>	≤ 100 m/s <sup>2</sup>
Shock (IEC 68-2-27)	≤ 1 000 m/s <sup>2</sup>	≤ 1 000 m/s <sup>2</sup>
Material housing	Aluminium	Aluminium
Connection	Cable axial or radial Conin axial or radial	Cable axial or radial Conin axial or radial
Size	Ø 58 mm	Ø 58 mm
Weight approx.	265 g	270 g
<b>Technical Data - electrical</b>		
Supply voltage (SELV)	DC 5 V / ±10 %	DC 5 V / ±10 %
Max. current w/o load	120 mA	120 mA
Incremental signals A, B	Sinus-Cosinus 1 V <sub>ss</sub>	Sinus-Cosinus 1 V <sub>ss</sub>
Absolute accuracy	±35"	±35"
Repeatability	±7"	±7"
Max. frequency	500 kHz	500 kHz
Reference signal: R	> 0,4 V (1 pulse / turn)	> 0,4 V (1 pulse / turn)
Page	95	97

# Absolute Shaft Encoders - ACURO industry

## AC 36 - BiSS / SSI

### Special Features

- Compact design for single or multiturn
- Interfaces: standard SSI, expanded SSI mode or BiSS
- Use of sine / cosine signals for fast control tasks possible




Type	AC36 - BiSS / SSI
<b>Technical Data - mechanical</b>	
Housing diameter	37.5 mm
Protection class shaft input	IP 64
Protection class housing	IP 64
Flange	pilot flange
Shaft diameter	6 mm
Max. speed	Continuous: 10 000 min <sup>-1</sup> , Short term: 12 000 min <sup>-1</sup>
Starting Torque	0,01 Nm
Moment of inertia	2.5 x 10 <sup>-6</sup> kgm <sup>2</sup>
Spring tether (hollow shaft)	
Tolerance axial / radial	± 0.5 mm / ± 0.05 mm
Shock resistance DIN EN 60068-2-27	1 000 m/s <sup>2</sup> (6 ms)
Vibration resistance DIN EN 60068-2-27	100 m/s <sup>2</sup> (10 ... 2 000 Hz)
Operating temperature	-25 ... +100 °C
Storage temperature	-15 ... +85 °C (because of packing)
Weight approx. ST/MT	80 g / 130 g
<b>Technical Data - electrical</b>	
Supply voltage	DC 5 V, -5 % / + 10 %
Max. current w/o load ST/MT	50 mA / 100 mA
Interface	BiSS or Standard SSI
Lines / Drives	Clock and Data / RS422
Output code	Gray
Resolution singleturn	13 Bit ... max. 17 Bit
Resolution multiturn	12 Bit
Incremental signals	Sinus - Cosinus 1 V <sub>ss</sub>
Number of pulses	2048
3 dB limiting frequency	500 kHz
Alarm output	Alarm bit (SSI option), warning bit and alarm bit (BiSS)
Connection	Cable axial or radial
Page	108

# Absolute Shaft Encoders - ACURO industry

## AC 58 - BiSS / SSI, Parallel

### Special Features

- Compact design for single or multiturn
- Aids for start-up and operation: diagnostic LED, preset key with optical response
- Interfaces: standard SSI, expanded SSI mode or BiSS
- Use of sine / cosine signals for fast control tasks possible

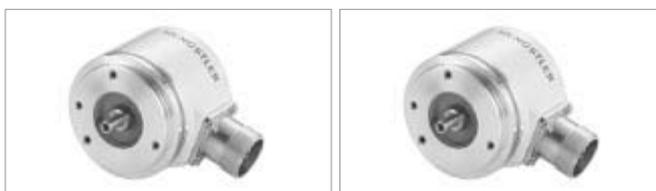

Type	AC 58 - BiSS / SSI	AC 58 - Parallel
<b>Technical Data - mechanical</b>		
Housing diameter	58 mm	58 mm
Protection class shaft input	IP 64 or IP 67	IP 64 or IP 67
Protection class housing	IP 64 (IP 67 optional)	ST: IP 67 MT: IP 64 (IP 67 optional)
Flange	Synchro flange, clamping flange, hubshaft with tether, square flange	Synchro flange, clamping flange, hubshaft with tether, square flange
Shaft diameter	Solid shaft 6 mm, 10 mm; Hub shaft 10 mm, 12 mm	Solid shaft 6 mm, 10 mm; Hub shaft 10 mm, 12 mm
Max. speed	Continuous: 10 000 min <sup>-1</sup> , Short term: 12 000 min <sup>-1</sup>	Continuous: 10 000 min <sup>-1</sup> , Short term: 12 000 min <sup>-1</sup>
Shaft load	axial 40 N / radial 60 N	axial 40 N / radial 60 N
Operating temperature	-40 ... 85 °C	-40 ... 85 °C
Weight approx. ST/MT	260 g / 310 g	350 g / 400 g
<b>Technical Data - electrical</b>		
Supply voltage	DC 5 V, -5 % / + 10 % or DC 10 - 30 V	DC 10 - 30 V
Max. current w/o load ST/MT	50 mA / 100 mA	200 mA / 300 mA
Interface	BiSS or Standard SSI	Parallel
Resolution singleturn	10-17 Bit, Gray Excess: 360, 720 steps	10-14 Bit, Gray Excess: 360, 720 steps
Resolution multi turn	12 Bit	12 Bit
Optional incremental signals	Sine / Cosine 1 Vpp	
Number of pulses	2048	
Absolute accuracy	±35"	
Repeat accuracy	±7"	
Parameterization	Code type, direction of rotation, warning, alarm	
Control input	Direction	ST: <u>L</u> atch, <u>D</u> irection, <u>T</u> ristate MT: Tristate
Reset key	Latch via parameterization	only with MT
Alarm output	Alarm bit (SSI option), warning bit and alarm bit (BiSS)	NPN o.c. max. 5 mA
Status LED	Green = OK.; red = alarm	Green = OK.; red = alarm
Connection	Cable axial or radial Conin axial or radial M12, 8 pole	Cable axial or radial 17 pole Conin axial or radial 37 pole Sub-D
Page	111	116

# Absolute Shaft Encoders - ACURO industry

## AC 58 with Fieldbus Interfaces

### Special Features

- Overall length: 63 mm for singleturn, 73 mm for multiturn, including bus cover
- The complete bus specific electronics is integrated in the connection cover
- Option: Display "tico"
- Diagnostic LEDs in the bus cover



Type	AC 58 - Profibus	AC 58 - CANopen	AC 58 - CANLayer 2
<b>Technical Data - mechanical</b>			
Housing diameter	58 mm	58 mm	58 mm
Protection class shaft input	IP 64 or IP 67	IP 64 or IP 67	IP 64 or IP 67
Protection class housing	Bus cover: IP 67 Flange: IP 64 (IP 67 optional)	Bus cover: IP 67 Flange: IP 64 (IP 67 optional)	Bus cover: IP 67 Flange: IP 64 (IP 67 optional)
Flange	Synchro flange, clamping flange, hubshaft with tether, square flange	Synchro flange, clamping flange, hubshaft with tether, square flange	Synchro flange, clamping flange, hubshaft with tether, square flange
Shaft diameter	Solid shaft 6 mm, 10 mm; Hub shaft 10 mm, 12 mm	Solid shaft 6 mm, 10 mm; Hub shaft 10 mm, 12 mm	Solid shaft 6 mm, 10 mm; Hub shaft 10 mm, 12 mm
Max. speed	Continuous: 10 000 min <sup>-1</sup> , Short term: 12 000 min <sup>-1</sup>	Continuous: 10 000 min <sup>-1</sup> , Short term: 12 000 min <sup>-1</sup>	Continuous: 10 000 min <sup>-1</sup> , Short term: 12 000 min <sup>-1</sup>
Shaft load	axial 40 N / radial 60 N	axial 40 N / radial 60 N	axial 40 N / radial 60 N
Operating temperature	-40 ... 85 °C	-40 ... 85 °C	-40 ... 85 °C
Weight approx. ST/MT	350 g / 400 g	350 g / 400 g	350 g / 400 g
<b>Technical Data - electrical</b>			
Supply voltage	DC 10 - 30 V	DC 10 - 30 V	DC 10 - 30 V
Max. current w/o load ST/MT	220 mA / 250 mA	220 mA / 250 mA	220 mA / 250 mA
Interface	RS 485	CAN High-Speed according ISO/DIS 11898	CAN High-Speed according ISO/DIS 11898
Profile / Protocol	Profibus DP with encoder profile Class C2 (parameterizable)	CANopen accord. DS 301 with encoder profile DSP 406	CAN 2.0 A
Programmable	Resolution, preset, direction	Resolution, preset, direction	Direction, limit values
Output code	Binary	Binary	Binary
Transfer mode		Poll mode (only on request), Change of State (automatic if value changes), cyclical with adjustable cycle timer	Poll mode (only on request), Change of State (automatic if value changes), cyclical with adjustable cycle timer
Baud rate	is automatically set within a range of 9,6 Kbaud through 12 Mbaud	set via DIP switch within a range of 10 trough 1000 Kbit/s	set via DIP switch within a range of 10 trough 1000 Kbit/s
Resolution singleturn	10-14 Bit	10-14 Bit	10-14 Bit
Resolution multiturn	12 Bit	12 Bit	12 Bit
Integrated special functions	speed, acceleration, operating time	speed, acceleration, round axis, limit values	
Connection	Bus cover with: <ul style="list-style-type: none"> <li>• 3 M12 connectors</li> <li>• 3 sealed cable exits</li> <li>• double conin 12 pole radial cw</li> <li>• 4 pole M12 f. "tico" display + 2 sealed cable exits</li> </ul>	Bus cover with: <ul style="list-style-type: none"> <li>• 3 sealed cable exits</li> <li>• double conin 9 pole radial cw</li> </ul> Cable radial or axial Conin radial or axial, cw or ccw	Bus cover with: <ul style="list-style-type: none"> <li>• 3 sealed cable exits</li> <li>• double conin connectors 9 pole radial cw</li> </ul> Cable radial or axial Conin radial or axial, cw or ccw
Page	121	125	128

# Absolute Shaft Encoders - ACURO industry

## AC 58 with Fieldbus Interfaces

### Special Features

- Overall length: 63 mm for singleturn, 73 mm for multiturn, including bus cover
- The complete bus specific electronics is integrated in the connection cover
- Option: Display "tico"
- DiagnosticLEDs in the bus cover



Type	AC 58 - DeviceNet	AC 58 - Interbus	AC 58 - Suconet
<b>Technical Data - mechanical</b>			
Housing diameter	58 mm	58 mm	58 mm
Protection class shaft input	IP 64 or IP 67	IP 64 or IP 67	IP 64 or IP 67
Protection class housing	Bus cover: IP 67	Bus cover: IP 67	Bus cover: IP 67
Flange	Synchro flange, clamping flange, hubshaft with tether, square flange	Synchro flange, clamping flange, hubshaft with tether, square flange	Synchro flange, clamping flange, hubshaft with tether, square flange
Shaft diameter	Solid shaft 6 mm, 10 mm; Hub shaft 10 mm, 12 mm	Solid shaft 6 mm, 10 mm; Hub shaft 10 mm, 12 mm	Solid shaft 6 mm, 10 mm; Hub shaft 10 mm, 12 mm
Max. speed	Continuous: 10 000 min <sup>-1</sup> , Short term: 12 000 min <sup>-1</sup>	Continuous: 10 000 min <sup>-1</sup> , Short term: 12 000 min <sup>-1</sup>	Continuous: 10 000 min <sup>-1</sup> , Short term: 12 000 min <sup>-1</sup>
Shaft load	axial 40 N / radial 60 N	axial 40 N / radial 60 N	axial 40 N / radial 60 N
Operating temperature	-40 ... 85 °C	-40 ... 85 °C	-40 ... 85 °C
Weight approx. ST/MT	350 g / 400 g	350 g / 400 g	350 g / 400 g
<b>Technical Data - electrical</b>			
Supply voltage	DC 10 - 30 V	DC 10-30 V	DC 10-30 V
Max. current w/o load ST/MT	220 mA / 250 mA	220 mA / 250 mA	220 mA / 250 mA
Interface	CAN High-Speed according ISO/ DIS 11898, CAN-Specification 2.0 A (11-Bit-Identifier)	Remote installation bus Interbus, ENCOM Profile K3 (parameterizable), K2	RS485
Profile / Protocol	DeviceNet nach Rev. 2.0, programmable encoder	K3 = ID-Code 37 K2 = ID-Code 36	SUCOnet-K1
Programmable	Resolution, preset, direction	Direction, scaling factor, preset, offset	Preset, offset, scaling factor, sequence of codes
Output code	Binary	32 Bit binary	Binary
Transfer mode	Poll mode (only on request), Change of State (automatic if value changes), cyclical with adjustable cycle timer		
Baud rate	set via DIP switches to 125, 250, 500 Kbaud	500 Kbaud according ENCOM	187,5 Kbaud
Resolution singleturn	10-14 Bit	10-12 Bit	13 Bit
Resolution multiturn	12 Bit	12 Bit	12 Bit
Connection	Bus cover with: <ul style="list-style-type: none"> <li>• 2 sealed cable exits</li> <li>• 4 pole M12 f. "tico" display + 2 sealed cable exits</li> <li>• 5 pole M12</li> </ul>	Bus cover with: <ul style="list-style-type: none"> <li>• 3 sealed cable exits</li> <li>• 4 pole M12 f. "tico" Display + 2 sealed cable exits</li> <li>• double conin 9 pole Cable 12 pole, radial and axial</li> </ul>	on request
Page	131	134	on request

# Absolute Shaft Encoders - ACURO industry

## AC 58 - SSI programmable

### Special Features

- Compact design: 59mm length for single or multiturn
- Aids for start-up and operation: diagnostic LED, preset key with optical response
- Parameterization: resolution, code type, sense of rotation, output format, warning, alarm
- Parameters can be stored in a non-volatile memory



Type	AC 58 - SSI Programmable
<b>Technical Data - mechanical</b>	
Housing diameter	58 mm
Protection class shaft input	IP 64 or IP 67
Protection class housing	IP 64 (IP 67 optional)
Flange	Synchro flange, clamping flange, hubshaft with tether, square flange
Shaft diameter	Solid shaft 6 mm, 10 mm; Hub shaft 10 mm, 12 mm
Max. speed	Continuous: 10 000 min <sup>-1</sup> , Short term: 12 000 min <sup>-1</sup>
Shaft load	axial 40 N / radial 60 N
Operating temperature	-40 ... 85 °C
Weight approx. ST/MT	260 g / 310 g
<b>Technical Data - electrical</b>	
Supply voltage	DC 10 - 30 V
Max. current w/o load	max. 250 mA
Interface	SSI programmable
Resolution singleturn	10 - 17 Bit
Resolution multiturn	12 Bit
Parameterization	resolution, code type, sense of rotation, output format, warning, alarm
Control input	Direction, Preset 1, Preset 2
Alarm output	Alarm bit
Status LED	Green = ok.; red = alarm
Connection	Cable radial or axial Conin radial or axial, ccw
Page	138



# Absolute Shaft Encoders

## Stainless Steel / Explosion-Proof



Type	AC 59/61	AX 70/ AX 71 (Stainless)
<b>Special Features</b>	<ul style="list-style-type: none"> <li>■ Compact design</li> <li>■ Protection class IP 67</li> <li>■ High corrosion resistance</li> <li>■ Robust design</li> <li>■ Resolution up to 29 Bit (17 Bit ST, 12 Bit MT)</li> <li>■ Connection with cable or with bus terminal box</li> <li>■ Applications:               <ul style="list-style-type: none"> <li>- Packaging machine for food and beverage</li> <li>- Ship equipment (e.g. cranes, winches, cable laying ships)</li> <li>- Offshore - Applications</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>■ ATEX certification for gas and dust explosion proof</li> <li>■ EX-classification: Ex II 2 G/D E Ex d II C T4/T6</li> <li>■ Same electrical performance as ACURO industry</li> <li>■ Protection class up to IP67</li> <li>■ Diameter only 70 mm</li> <li>■ Robust design</li> <li>■ Available with stainless steel</li> <li>■ Resolution up to 29 Bit (17 Bit ST, 12 Bit MT)</li> <li>■ Applications: enamelling production line, petro chemistry, bottling machines, mixers, silo works, mills</li> <li>■ Interfaces: SSI, SSI programmable, Profibus, CANopen</li> </ul>
<b>Technical Data – mechanical</b>		
Housing diameter		70 mm
Shaft diameter	10 mm	10 mm
Flange	Square flange 63.5 x 63.5 mm	Clamping flange
Max. speed	Short term: 10 000 min <sup>-1</sup> Continuous: 6 000 min <sup>-1</sup>	6 000 min <sup>-1</sup> (T6) 10 000 min <sup>-1</sup> (T4)
Torque	< 1 Ncm	≤ 1 Ncm
Moment of inertia	approx. 20 gcm <sup>2</sup>	approx. 20 gcm <sup>2</sup>
Max. shaft load	axial 40 N/ radial 60 N	axial 40 N/ radial 100 N
Vibration proof (IEC 68-2-6)	100 m/ s <sup>2</sup> (10 - 500 Hz)	100 m/ s <sup>2</sup> (10 - 500 Hz)
Shock resistance (IEC 68-2-27)	1000 m/ s <sup>2</sup> (6 ms)	1000 m/ s <sup>2</sup> (6 ms)
Operating temperature	SSI, BiSS, Parallel, SSI-P: -40...+100°C Profibus, CANopen, CANlayer2, DeviceNet, Interbus: -40...+ 85°C	-20 ... +60 °C (T4) -10 ... +40 °C (T6)
Storage temperature	40...+ 85°C	-25 ... +80 °C
Material Shaft/ Housing	Stainless steel	Aluminium (AX 70) Stainless steel (AX 71)
Weight approx. ST/MT	1088 g (AC 61), 680 g (AC 59)	1 000 g (AX 70), 1 900 g (AX 71)
<b>Technical Data – electrical</b>		
	The electrical data depend on the type of interface. Please refer to the specific interface chapter.	The electrical data depend on the type of interface. Please refer to chapter "AX 70 / AX 71".
Page	150	157

## Motor Feedback Systems - Kit Encoders for Miniature DC and Stepper Motors



Type	E 9	M 9	M 14
<b>Special features</b>	<ul style="list-style-type: none"> <li>■ ideal for position and speed sensing in small machines and actuators</li> <li>■ low power standby mode is ideal for battery powered devices</li> <li>■ 200 kHz operating frequency</li> <li>■ resolution to 512 lines/rev</li> </ul>	<ul style="list-style-type: none"> <li>■ ideal for position and speed sensing in small machines and actuators</li> <li>■ 200 kHz operating frequency</li> <li>■ resolution to 512 lines/rev</li> </ul>	<ul style="list-style-type: none"> <li>■ ideal economical feedback device for servo and stepper motors</li> <li>■ short axial length and compact 1.5 inch diameter</li> <li>■ easy "snap-on" installation</li> <li>■ high resolution to 1024 lines/rev and 200 kHz bandwidth</li> <li>■ drop-in replacement for HP 5540</li> </ul>
<b>Number of pulses</b>	100 ... 512	100 ... 512	200 ... 1 024
<b>Commutation</b>	None	None	None
<b>Technical Data - mechanical</b>			
Shaft diameter	Hollow shaft Ø 1.5 ... 4.0 mm	Hollow shaft Ø 1.5 ... 4.0 mm	Hollow shaft Ø 3.0 ... 8.0 mm
Max. speed	12 000 min <sup>-1</sup>	12 000 min <sup>-1</sup>	12 000 min <sup>-1</sup>
Protection class housing/bearing	---	---	---
Operating temperature	-40 ... + 100 °C	-40 ... + 100 °C	-40 ... + 100 °C
Diameter	22.0 mm	22.0 mm	38.0 mm
Mounting depth	20.0 mm	14.8 mm	17.2 mm
<b>Technical Data - electrical</b>			
Output	TTL	TTL	TTL
Supply voltage (SELV)	DC 5 V ±10 %	DC 5 V ±10 %	DC 5 V ±10 %
Max. current w/o load	10 mA, typ. Standby current: max. 50 µA	10 mA, typ.	10 mA, typ.
Max. pulse frequency	200 kHz	200 kHz	200 kHz
Max. output load	3 mA (25°C), 2 mA (100°C)	3 mA (25°C), 2 mA (100°C)	6mA (25°C) 4 mA (100°C)
Pulse shape	Square wave	Square wave	Square wave
Phasing	90°±18° electrical	90°±18° electrical	90°±18° electrical
Symmetry	180°±18° electrical	180°±18° electrical	180°±18° electrical
<b>Page</b>	175	178	181

# Motor Feedback Systems - Hollow shaft Encoders for Asynchronous & DC Motors



Type	RI 36-H	RI 58-D	RI 58TD
<b>Special features</b>	<ul style="list-style-type: none"> <li>■ miniature industry encoder for high numbers of pulses</li> <li>■ short mounting depth</li> <li>■ easy mounting procedure</li> <li>■ applications, e.g. motors, machine tools, packaging machines, robots, automated SMD equipment</li> </ul>	<ul style="list-style-type: none"> <li>■ direct mounting without coupling</li> <li>■ flexible hollow shaft concept up to 14 mm</li> <li>■ through hollow shaft or as end shaft (blind shaft)</li> <li>■ easy mounting procedure with clamping flange or fastening thread</li> <li>■ short mounting depth of 33 mm</li> <li>■ operating temperature up to 80 °C</li> <li>■ Fixing of the flange with a stator coupling or cylindrical pin</li> <li>■ applications, e.g. positioning drives, motors</li> </ul>	<ul style="list-style-type: none"> <li>■ direct mounting without coupling</li> <li>■ flexible hollow shaft concept up to 14 mm</li> <li>■ through hollow shaft or as end shaft (blind shaft)</li> <li>■ easy mounting procedure with clamping flange or fastening thread</li> <li>■ short mounting depth of 33 mm</li> <li>■ operating temperature up to 100 °C</li> <li>■ Fixing of the flange with a stator coupling or cylindrical pin</li> <li>■ applications, e.g. positioning drives, motors</li> </ul>
<b>Number of pulses</b>	5 ... 3 600	1 ... 5 000	4 ... 2 500
<b>Commutation</b>	None	None	None
<b>Technical Data - mechanical</b>			
Shaft diameter	Hollow shaft 4 / 6 / 8 / 10 mm	Hollow shaft 10 mm / 12 mm / 14 mm	Hollow shaft 10 mm / 12 mm / 14 mm
Max. speed	10 000 min <sup>-1</sup>	6 000 min <sup>-1</sup>	6 000 min <sup>-1</sup>
Max. speed (continuous)			
Protection class housing/bearing	IP 64/64	IP 65/64	IP 65/64
General design	as per DIN VDE 0160, protection class III	as per DIN VDE 0160, protection class III	as per DIN VDE 0160, protection class III
Operating temperature	-10 ... +70 °C	-10 ... +70 °C	-25 .. +100 °C
Diameter	36 mm	58 mm	58 mm
Mounting depth	39 mm	33 mm .. 50.5 mm (depends on version)	33 mm .. 50.5 mm (depends on version)
<b>Technical Data - electrical</b>			
Output	RS 422 / push-pull / push-pull complementary	RS 422 / push-pull / push-pull complementary	RS 422 / push-pull / push-pull complementary
Supply voltage (SELV)	DC 5 V / DC 10 - 30 V	DC 5 V / DC 10 - 30 V	DC 5 V / DC 10 - 30 V
Max. current w/o load	40 mA (DC 5 V), 30 mA (DC 24 V), 60 mA (DC 10 V)	40 mA (DC 5 V), 30 mA (DC 24 V), 60 mA (DC 10 V)	40 mA (DC 5 V), 30 mA (DC 24 V), 60 mA (DC 10 V)
Max. pulse frequency	300 kHz (RS 422) 200 kHz (push-pull)	300 kHz (RS 422) 200 kHz (push-pull)	300 kHz (RS 422) 200 kHz (push-pull)
Max. output load	RS 422: ±30 mA push-pull with short circuit protection: 30 mA (DC 10 - 30 V)	RS 422: ±30 mA push-pull with short circuit protection: 30 mA (DC 10 - 30 V)	RS 422: ±30 mA push-pull with short circuit protection: 30 mA (DC 10 - 30 V)
Pulse shape	Square wave	Square wave	Square wave
<b>Page</b>	60	66	66

## Motor Feedback Systems - Hollow shaft Encoders for Asynchronous & DC Motors



Type	RI 76TD	RI 80-E
<b>Special features</b>	<ul style="list-style-type: none"> <li>■ through hollow shaft</li> <li>■ shaft diameters 15 to 42 mm</li> <li>■ external diameter only 76 mm</li> <li>■ simple installation with clamping ring front or rear</li> <li>■ operating temperature up to 100 °C</li> <li>■ applications e.g. motors, printing machines, elevators</li> </ul>	<ul style="list-style-type: none"> <li>■ incremental Output</li> <li>■ 30...45 mm hollow shaft</li> <li>■ rugged mechanical design</li> <li>■ unbreakable disc</li> <li>■ integrated diagnostic system</li> <li>■ wide voltage range 5 ... 30 V</li> </ul>
<b>Number of pulses</b>	1 ... 10 000	1024, 2048, 4096 other number of pulses on request
<b>Commutation</b>	None	None
<b>Technical Data - mechanical</b>		
Shaft fixation	Clamping ring front or rear	Keyway, set screw
Coupling	stator coupling (hubshaft with tether)	Spring tether (single, double)
Shaft diameter	Hollow shaft 15 ... 42 mm	Hollow shaft 30 ... 45 mm
Max. speed	6 000 min <sup>-1</sup> (depends on version)	3 600 min <sup>-1</sup> (IP50), 1 500 min <sup>-1</sup> (IP64)
Protection class housing/bearing	IP 50/40 (Option: IP 65/64)	IP50, IP64
General design	as per DIN EN 61010 protection class III	as per DIN EN 61010, protection class III, Contamination level 2, over voltage class II
Operating temperature	-25 ... +100 °C	-20 ... +70 °C
Connection	Cable radial	Sub-D 15p. / cable, radial
Diameter	76 mm	
Weight	320 ... 580 g (depends on version)	1 000 g
<b>Technical Data - electrical</b>		
Output	RS 422/push-pull/push-pull complementary	RS 422/push-pull/push-pull complementary
Supply voltage (SELV)	DC 5 V/DC 10 - 30 V	DC 5 V ±10% or DC 5 - 30 V
Max. current w/o load	40 mA (DC 5 V), 30 mA (DC 24 V), 60 mA (DC 10 V)	60 mA (DC 5 V), 60 mA (DC 10 V), 35 mA (DC 24 V)
Max. pulse frequency	300 kHz (RS 422) 200 kHz (push-pull)	600 kHz (RS 422) 200 kHz (push-pull)
Max. output load	RS 422: ±30 mA push-pull with short circuit protection: 30 mA (DC 10 - 30 V)	RS 422: ±30 mA push-pull with short circuit protection: 40 mA (DC 5 - 30 V)
Alarm output	NPN-O.C. 5 mA	NPN-O.C. 5 mA
Pulse shape	Square wave	Square wave
Pulse duty factor	1 : 1	1 : 1
Page	72	76

## Motor Feedback Systems - Hollow shaft Encoders for Asynchronous & DC Motors




<b>Type</b>	<b>RIS 58-H</b>
<b>Special features</b>	<ul style="list-style-type: none"> <li>■ harmonic distortion less than 1 %</li> <li>■ extended temperature range, -40° up to +100 °C</li> <li>■ 500 kHz sine-wave incremental signal frequency response</li> <li>■ self-monitoring and error compensation</li> <li>■ secure against short-circuit and overload</li> </ul>
<b>Number of pulses</b>	1 000, 1 024, 2 048, 2 500, 5 000
<b>Technical Data - mechanical</b>	
Shaft diameter	10 mm, 12 mm hollow shaft
Balance tolerances	axial ±1.5 mm, radial ±0.2 mm
Max. speed	12 000 min <sup>-1</sup>
Torque	≤ 1 Ncm
Protection (EN 60529)	Bearing IP 64, Housing IP 65
General design	as per DIN EN 61010-1
Operating temperature	-40 ... +100 °C
Vibration (IEC 68-2-6)	≤ 100 m/s <sup>2</sup>
Shock (IEC 68-2-27)	≤ 1 000 m/s <sup>2</sup>
Material housing	Aluminium
Connection	Cable axial or radial Conin axial or radial
Size	Ø 58 mm
Weight approx.	270 g
<b>Technical Data - electrical</b>	
Supply voltage (SELV)	DC 5 V / ±10 %
Max. current w/o load	120 mA
Incremental signals A, B	Sinus-Cosinus 1 V <sub>ss</sub>
Absolute accuracy	±35"
Repeatability	±7"
Max. output frequency	500 kHz
Reference signal: R	> 0,4 V (1 pulse / turn)
<b>Page</b>	<b>97</b>

## Motor Feedback Systems - Hollow shaft Encoders for Asynchronous & DC Motors



Type	AC 58 - BiSS / SSI	AC 110 - BiSS / SSI
<b>Technical Data - mechanical</b>		
Housing diameter	58 mm	110 mm
Shaft diameter	Hub shaft 10 mm, 12 mm	up to 50 mm
Protection class shaft input	IP 64 or IP 67	IP 50 or IP 64
Protection class housing	IP 64 (IP 67 optional)	IP 50 or IP 64
Flange	Hubshaft with tether	Hollow shaft with tether
Max. speed	Continuous: 10 000 min <sup>-1</sup> , Short term: 12 000 min <sup>-1</sup>	IP 50: 3600 min <sup>-1</sup> IP 64: 1500 min <sup>-1</sup>
Shaft load	axial 40 N / radial 60 N	
Spring tether (hollow shaft)		
Tolerance axial / radial	± 1.5 mm / ± 0.2 mm	± 0.5 mm / ± 0.05 mm
Shock resistance (IEC 68-2-27)	1 000 m/s <sup>2</sup> (6 ms)	1000 m/ s <sup>2</sup> (6 ms)
Vibration resistance (IEC 68-2-6)	100 m/s <sup>2</sup> (10 ... 2 000 Hz)	100 m/ s <sup>2</sup> (10 - 500 Hz)
Operating temperature	-40 ... 100 °C	-20 ... +70°C
Weight approx. ST/MT	260 g / 310 g	1000 g
<b>Technical Data - electrical</b>		
Supply voltage	DC 5 V, -5 % / + 10 % or DC 10 - 30 V	DC 5 V (-5 % / +10 %) or DC 10-30 V
Max. current w/o load ST/MT	50 mA / 100 mA	120 mA
Interface	BiSS or Standard SSI	BiSS or Standard SSI
Lines/ Drives	Clock and Data/ RS422	Clock and Data/ RS422
Output code	Binary or Gray	Binary or Gray
Linearity	±1/2 LSB (± 1 LSB for resolution > 13 Bit)	
Resolution singleturn	10-17 Bit, Gray Excess: 360, 720 steps	10 - 17 Bit
Resolution multiturn	12 Bit	only singleturn
Optional incremental signals	Sine / Cosine 1 Vpp	Sine - Cosine 1 Vss
Number of pulses	2048	4096
3 db limiting frequency		500 kHz
Absolute accuracy	±35"	± 35"
Repeatability	±7"	± 7"
Parameterization	Code type, sense of rotation, warning, alarm	Code type, sense of rotation, warning, alarm
Control input	$\overline{\text{Direction}}$	$\overline{\text{Direction}}$
Reset key	Disable via parameterization	
Alarm output	Alarm bit (SSI option), warning bit and alarm bit (BiSS)	Alarm bit (SSI option), warning bit and alarm bit (BiSS)
Status LED	Green = OK.; red = alarm	
Connection	Cable axial or radial Conin axial or radial M12, 8 pole	Cable radial
Page	111	147

## Motor Feedback Systems - Comcoders for AC Synchronous & BLDC Motors

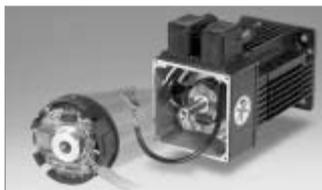


Type	M15	M21
<b>Special features</b>	<ul style="list-style-type: none"> <li>■ through hollow shaft, diameter 3.18 ... 10 mm</li> <li>■ output signals: A, B, N as incremental signals as well as 4, 6 or 8 pole commutation signals</li> <li>■ external diameter 40 mm (1.5")</li> <li>■ mounting depth only 28 mm (1.1")</li> <li>■ max. speed up to 12 000 min<sup>-1</sup></li> <li>■ operating temperature up to 120°C</li> </ul>	<ul style="list-style-type: none"> <li>■ through hollow shaft, diameter 6 ... 12.7 mm</li> <li>■ output signals: A, B, N as incremental signals as well as 4, 6, 8, 10, 12 or 16 pole commutation signals</li> <li>■ external diameter 53 mm (2.1")</li> <li>■ mounting depth only 20 mm (0.8")</li> <li>■ max. speed up to 12 000 min<sup>-1</sup></li> <li>■ operating temperature up to 120°C</li> </ul>
<b>Number of pulses</b>	200 ... 1 024	500 ... 2 048
<b>Commutation</b>	4, 6 or 8 pole	4, 6, 8, 10, 12 or 16 pole
<b>Technical Data - mechanical</b>		
Shaft diameter	Hollow shaft 3.18 ... 10 mm	Hollow shaft 6 ... 12.7 mm
Max. speed	12 000 min <sup>-1</sup>	12 000 min <sup>-1</sup>
Max. speed (continuous)		
Protection class housing/bearing	IP 40/40	IP 40/40 (with cover)
General design		
Operating temperature	-40 ... +120 °C	-40 ... +120 °C
Diameter	39.6 mm	53 mm
Mounting depth	27.9 mm	20.3 mm
<b>Technical Data - electrical</b>		
Output	NPN-O.C. / RS 422	NPN-O.C. / RS 422
Supply voltage (SELV)	DC 5 V / DC 12 V ±10%	DC 5 V / DC 2 V ±10%
Max. current w/o load	Incremental: max. 100 mA Incremental + Commutation: 120 mA	Incremental: max. 100 mA Incremental + Commutation: 175 mA
Max. pulse frequency	200 kHz	200 kHz
Max. output load	NPN-O.C. 16 mA RS 422: ±40 mA	RS 422: ±40 mA NPN-O.C. 16 mA
Max. output load commutation	NPN-O.C. 16 mA RS 422: ±40 mA	NPN-O.C. 16 mA RS 422: ±40 mA
Pulse shape	Square wave	Square wave
Phasing	90°±18° electrical	90°±18° electrical
Symmetry	180°±18° electrical	180°±18° electrical
Accuracy commutation signals	±6 arc-mins. max.	±6 arc-mins. max.
<b>Page</b>	186	191

## Motor Feedback Systems - Comcoders for AC Synchronous & BLDC Motors



Type	F10	F15	F21
<b>Special features</b>	<ul style="list-style-type: none"> <li>■ through hollow shaft, diameter 6 mm</li> <li>■ output signals: A, B, N as incremental signals as well as 6 or 10 pole commutation signals</li> <li>■ resolution up to 2 048 ppr</li> <li>■ frequency response to 300 kHz</li> <li>■ resolver compatible mounting</li> <li>■ operating temperature up to 120 °C</li> </ul>	<ul style="list-style-type: none"> <li>■ through hollow shaft, diameter 9.52 mm</li> <li>■ output signals: A, B, N as incremental signals as well as 6, 8 or 10 pole commutation signals</li> <li>■ resolution up to 2 048 ppr</li> <li>■ frequency response to 300 kHz</li> <li>■ resolver compatible mounting</li> <li>■ operating temperature up to 120 °C</li> </ul>	<ul style="list-style-type: none"> <li>■ through hollow shaft, diameter 12.7 mm</li> <li>■ output signals: A, B, N as incremental signals as well as 6, 8, 10, 12 or 16 pole commutation signals</li> <li>■ resolution up to 2 048 ppr</li> <li>■ frequency response to 300 kHz</li> <li>■ resolver compatible mounting</li> <li>■ operating temperature up to 120 °C</li> </ul>
<b>Number of pulses</b>	1 024, 2 048	1 024, 2 048	1 024, 2 048
<b>Commutation</b>	6 or 10 pole	6, 8 or 10 pole	6, 8, 10, 12 or 16 pole
<b>Technical Data - mechanical</b>			
Shaft diameter	Hollow shaft 6 mm	Hollow shaft 9.52 mm	Hollow shaft 12.7 mm
Max. speed	12 000 min <sup>-1</sup>	12 000 min <sup>-1</sup>	12 000 min <sup>-1</sup>
Max. speed (continuous)	5 000 min <sup>-1</sup>	5 000 min <sup>-1</sup>	5 000 min <sup>-1</sup>
Protection class housing/bearing	---	---	---
General design			
Operating temperature	0° ... +120 °C	0° ... +120 °C	0° ... +120 °C
Diameter	31.7mm max.	36.8 mm max.	53 mm max.
Mounting depth	22.5 mm	22.4 mm	26 mm max.
<b>Technical Data - electrical</b>			
Output	RS422	RS422	RS422
Supply voltage (SELV)	DC 5 V ±10 %	DC 5 V ±10 %	DC 5 V ±10 %
Max. current w/o load	100 mA max.	100 mA max.	100 mA max.
Max. pulse frequency	300 kHz	300 kHz	300 kHz
Max. output load	RS422: ±40mA,	RS422: ±40mA,	RS422: ±40mA,
Max. output load commutation	O.C.: 8mA or RS 422: ±40mA,	O.C.: 8mA or RS 422: ±40mA,	O.C.: 8mA or RS422: ±40mA,
Pulse shape	Square wave	Square wave	Square wave
Accuracy incremental signals	±2.5 arc-mins.	±2.5 arc-mins.	±2.5 arc-mins.
Accuracy commutation signals	±6 arc-mins. max.	±6 arc-mins. max.	±6 arc-mins. max.
<b>Page</b>	196	200	204

## Motor Feedback Systems - Comcoders for AC Synchronous & BLDC Motors

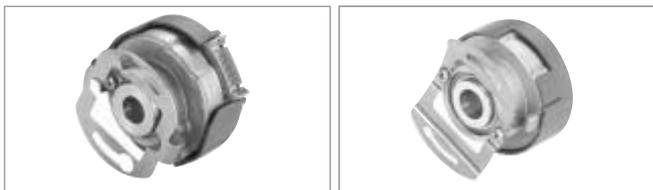

Type	F14	F18
<b>Special features</b>	<ul style="list-style-type: none"> <li>■ through hollow shaft, diameter 6 ... 8mm</li> <li>■ Phased Array Technology</li> <li>■ resolution up to 5 000 ppr</li> <li>■ with 4, 6, 8 and 10 pole commutation signals</li> <li>■ frequency response to 500 kHz</li> <li>■ stator coupling</li> <li>■ resolver compatible mounting (optional)</li> <li>■ external diameter 40 mm</li> <li>■ operating temperature up to +120°C</li> </ul>	<ul style="list-style-type: none"> <li>■ through hollow shaft, diameter 6 ... 12.7 mm</li> <li>■ Phased Array Technology</li> <li>■ resolution up to 10 000 ppr</li> <li>■ with 4, 6, 8, 10, 12 and 16 pole commutation signals</li> <li>■ frequency response to 500 kHz</li> <li>■ stator coupling</li> <li>■ external diameter 50 mm</li> <li>■ operating temperature up to +120°C</li> </ul>
<b>Number of pulses</b>	200 ... 5 000	500 ... 10 000
<b>Commutation</b>	4, 6, 8 or 10 pole	4, 6, 8, 10, 12 or 16 pole
<b>Technical Data - mechanical</b>		
Shaft diameter	Hollow shaft 6 ... 8 mm	Hollow shaft 6 ... 12.7 mm
Max. speed	12 000 min <sup>-1</sup>	12 000 min <sup>-1</sup>
Max. speed (continuous)		
Protection class housing/bearing	IP40/40 (with cover)	IP40/40 (with cover)
General design		
Operating temperature	0° ... +120 °C	0° ... +120 °C
Diameter	39.4 mm	49.7 mm
Mounting depth	34.6 mm max.	43.4 mm max.
<b>Technical Data - electrical</b>		
Output	O.C. or RS 422	O.C. or RS 422
Supply voltage (SELV)	DC 5 V ±10 %	DC 5 V ±10 %
Max. current w/o load	Incremental: max. 150 mA Incremental + Commutation: 175 mA	Incremental: max. 150 mA Incremental + Commutation: 175 mA
Max. pulse frequency	500 kHz	500 kHz
Max. output load	RS 422: ±40 mA NPN-O.C. 16 mA	RS 422: ±40 mA NPN-O.C. 16 mA
Max. output load commutation	NPN-O.C. 16 mA RS 422: ±40 mA	NPN-O.C. 16 mA RS 422: ±40 mA
Pulse shape	Square wave	Square wave
Accuracy incremental signals	±2.5 arc-mins.	±2.5 arc-mins.
Accuracy commutation signals	±6 arc-mins. max.	±6 arc-mins. max.
<b>Page</b>	208	212

## Motor Feedback Systems - Absolute Encoders for AC Synchronous & BLDC Motors



Type	AD 36	AD 58	AC 110
<b>Technical Data - mechanical</b>			
Housing diameter	37.5mm	58 mm	110 mm
Shaft diameter	8 mm	Cone 10 mm	up to 50 mm
Protection class shaft input	IP 40	IIP 40	IP 50 or IP 64
Protection class housing	IP 40	IP 40	IP 50 or IP 64
Flange	Hollow shaft with tether	Hollow shaft with tether, tapered shaft	Hollow shaft with tether
Max. speed	Continuous 10 000 min <sup>-1</sup> , Short term 12 000 min <sup>-1</sup>	Continuous 10 000 min <sup>-1</sup> , Short term 12 000 min <sup>-1</sup>	IP 50: 3600 min <sup>-1</sup> IP 64: 1500 min <sup>-1</sup>
Shaft load	0.01 Nm	0.01 Nm	
Torque	2.5 x 10 <sup>-6</sup> kgm <sup>2</sup>	3.8 x 10 <sup>-6</sup> kgm <sup>2</sup>	
Spring tether (hollow shaft)			
Tolerance axial / radial	± 0.5 mm/ ±0.05 mm	± 1.5 mm/ ±0.2 mm	± 0.5 mm / ± 0.05 mm
Shock resistance (IEC 68-2-27)	1 000 m/s <sup>2</sup> (6 ms)	1 000 m/s <sup>2</sup> (6 ms)	1000 m/ s <sup>2</sup> (6 ms)
Vibration resistance (IEC 68-2-6)	100 m/s <sup>2</sup> (10 ... 2 000 Hz)	100 m/s <sup>2</sup> (10 ... 2 000 Hz)	100 m/ s <sup>2</sup> (10 - 500 Hz)
Operating temperature	-25 ... +100 °C	-15... +120 °C	-20 ... +70 °C
Weight approx. ST/MT	80 g / 130 g	216 g / 310 g	1000 g
<b>Technical Data - electrical</b>			
Supply voltage	DC 5 V (-5 %/ +10 %) or DC 10-30 V	DC 5 V, -5 % / + 10 %	DC 5 V (-5 %/ +10 %) or DC 10-30 V
Max. current w/o load ST/MT	50 mA / 100 mA	50 mA / 100 mA	120 mA
Interface	BiSS or Standard SSI	BiSS or Standard SSI	
Lines/ Drives	Clock and Data / RS422	Clock and Data / RS422	Clock and Data/ RS422
Output code	Binary or Gray	Binary or Gray	Binary or Gray
Resolution singleturn	13 Bit (SSI), 19 Bit (BiSS)	13 Bit (SSI) ... max. 22 Bit (BiSS)	10 - 17 Bit
Resolution multiturn	12 Bit	12 Bit	only singleturn
Optional incremental signals	Sinus - Cosinus 1 Vss	Sinus - Cosinus 1 Vss	Sine - Cosine 1 Vss
Number of pulses	2048	2048	4096
3 db limiting frequency	500 kHz	500 kHz	500 kHz
Absolute accuracy	±35"	±35"	± 35"
Repeatability	±7"	±7"	± 7"
Alarm output	Aalarm bit (SSI), warning bit and alarm bit (BiSS)	alarm bit (SSI), warning bit and alarm bit (BiSS)	alarm bit (SSI), warning bit and alarm bit (BiSS)
Connection	Cable PCB-Connector 12 pole	Cable PCB-Connector 12 pole	Cable radial
Page	216	219	147

## Motor Feedback Systems - Sine-wave Encoders for AC Synchronous & BLDC Motors



Type	S21
<b>Special features</b>	<ul style="list-style-type: none"> <li>■ operating temperature range of -15 up to +120 °C</li> <li>■ 500 kHz limiting frequency with excellent signal quality</li> <li>■ excellent immunity to interference (EN 61000-4-4, Class 4)</li> <li>■ signal control and system monitoring</li> <li>■ high signal quality through control and error compensation</li> </ul>
<b>Technical Data - mechanical</b>	
Shaft form	Cone 1/10
Shaft variations	Tapered solid shaft (Tapered hollow shaft on request)
Shaft diameter	10 mm
Absolute max. shaft load radial / axial	with tapered solid shaft: 90 N / 20 N
Balance tolerances	axial ± 0.5 mm, radial ± 0.1 mm
Max. speed	12.000 min <sup>-1</sup>
Torque	≤ 1 Ncm
Protection class (EN 60529)	IP 40
General design	as per DIN EN 61010-1
Operating temperature	-15 ... +120 °C
Vibration resistance (IEC 68-2-6)	≤ 100 m/s <sup>2</sup>
Shock resistance (IEC 68-2-27)	≤ 1000 m/s <sup>2</sup>
Material housing	Aluminium
Connection	PCB connector + cable
Size	Ø 53.5 mm
Weight approx.	170 g
<b>Technical Data - electrical</b>	
Supply voltage (SELV)	DC 5 V ±10 %
Max. current w/o load	max. 120 mA
Incremental signals A, B	Sinus - Cosinus 1 V <sub>ss</sub>
Number of pulses	2048
Absolute accuracy	±35"
Repeatability	±7"
Max. output frequency	500 kHz
Reference signal: R	> 0.4 V (1pulse / turn)
Commutation signal: C, D	Sinus - Cosinus 1 V <sub>ss</sub> (1 period / turn)
Page	222

## Motor Feedback Systems - Resolver for AC Synchronous & BLDC Motors




Type	Resolvers
<b>Special features</b>	<ul style="list-style-type: none"> <li>■ Through hollow shaft, diameter 4 up to 92 mm</li> <li>■ compact design</li> <li>■ easy and quick mounting procedure (standardized resolver mounting)</li> <li>■ Operating temperature up to 155 °C</li> <li>■ Applications, e.g. motors, machine tools, robots, automated SMD equipment, medical technology</li> </ul>
<b>Number of pulses</b>	Drive or external electronics
<b>Commutation</b>	Drive or external electronics
<b>Technical Data - mechanical</b>	
Shaft diameter	Hollow shaft 4.0 .. 92.7 mm
Max. speed	20 000 min <sup>-1</sup> (special: >30 000 min <sup>-1</sup> )
Max. speed (continuous)	
Protection class housing/bearing	---
General design	
Operating temperature	-25 ... +155 °C
Diameter	Ø 26.5 ... 139.7 mm
Mounting depth	16.5 ... 31.8 mm
<b>Technical Data - electrical</b>	
Output	depends on input signal
Supply voltage (SELV)	
Max. current w/o load	
Max. pulse frequency	
Max. output load	
Max. output load commutation	
Pulse shape	Sine
Tolerance	typical +/- 10°
Accuracy commutation signals	---
Page	225

## Application Examples for Encoders


### Encoder Applications:

- Packaging industry
- Food industry
- Medical technology
- Elevators
- Conveyor systems
- Robotics
- Cranes
- Positioning control
- Electronics
- Baggage conveyor systems
- Metalworking
- Motors
- Servo motors
- Vector drives
- Mechanical engineering
- Turning machines
- Stamping machines
- Bending machines
- Welding systems
- Sawing machines
- etc.

# Application Examples with Encoders

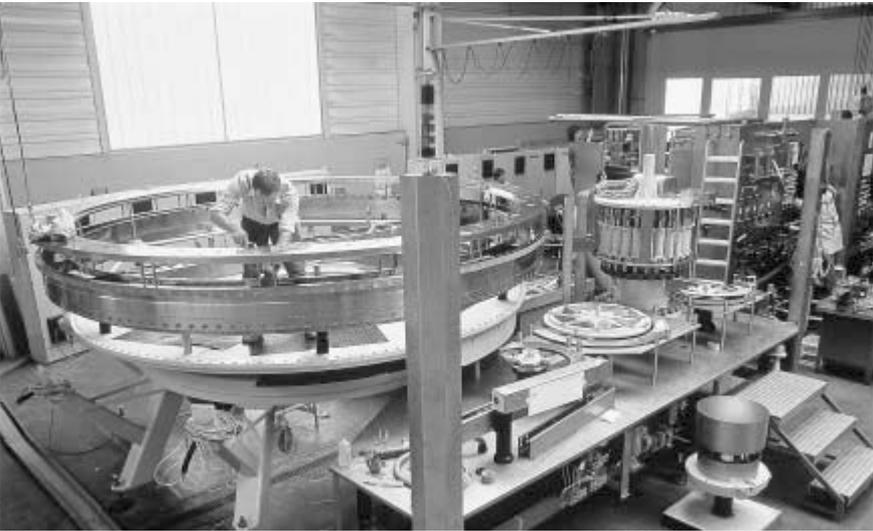

# Application Examples with Motor Encoders

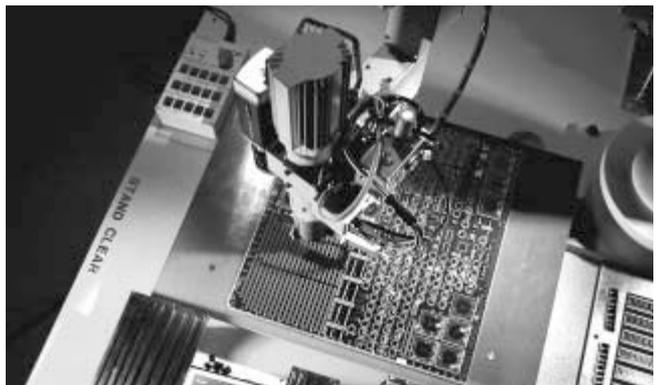

## Incremental Encoders



Incremental encoders are sensors capable of generating signals in response to rotary movement. In conjunction with mechanical conversion devices, such as rack-and-pinions, measuring wheels or spindles, incremental shaft encoders can also be used to measure linear movement. The shaft encoder generates a signal for each incremental change in position.

With the optical transformation, a line-coded disc made of metal, plastic or glass and positioned on a rotary bearing interrupts the infra red light ray emitted by gallium arsenid sender diode. The number of lines determines the resolution, i.e. the measuring points within a revolution. The interruptions of the light ray are sensed by the receptor element and electronically processed. The information is then made available as a rectangular signal at the encoder output.

### Examples for typical applications of incremental encoders:

- Door closing devices for trains
- Desktop robots
- Lens grinding machines
- Plotters
- Testing machines for optical waveguides
- Scattering machines
- Tampon printing machines
- Ultrasonic welding
- Screwing machines
- Labelling machines
- x/y indication
- Analysis devices
- Drilling machines
- Mixing machines

# Incremental Encoders - Industrial types

## Solid shaft



Type	RI 30	RI 36	RI 58
<b>Special features</b>	<ul style="list-style-type: none"> <li>■ small encoder for industrial applications</li> <li>■ low power consumption</li> <li>■ high immunity to interference</li> <li>■ cable lengths up to 100 m</li> <li>■ suitable for high pulse frequencies</li> <li>■ high level of protection</li> <li>■ applications, e.g. CNC machine, handling systems, motors, medical technology, textile machinery</li> </ul>	<ul style="list-style-type: none"> <li>■ small industrial encoder for high numbers of pulses</li> <li>■ high operating safety</li> <li>■ applications, e.g. CNC axles, machine tools, robots, special machinery, high-speed winding machines</li> </ul>	<ul style="list-style-type: none"> <li>■ universal industrial encoder</li> <li>■ up to 10 000 pulses</li> <li>■ protection class up to IP 67</li> <li>■ operating temperature up to 100°C</li> <li>■ suitable for high shock loads</li> <li>■ applications e.g. machine tools, CNC axles, packaging machinery, motors, drives, injection moulding machines, sawing machines, textile machinery</li> </ul>
<b>Number of pulses</b>	5 ... 1500	5 ... 3600	1 ... 10000
<b>Technical Data - mechanical</b>			
Flange	S = synchro flange, R = pilot flange	S = synchro flange, R = pilot flange	S = synchro flange, R = pilot flange G, Q = square flange, M = Synchro clamping flange
Shaft diameter	5 mm	6 / 6.35 mm	6 / 6.35 / 7 / 10 / 9.52 / 12 mm
Absolute max. shaft load radial/axial	10/5 N	10/5 N	Ø 12 mm - 80/60 N Ø 7 ... 10 mm - 60/40 N Ø 6 mm/6.35 mm - 40/20 N
Absolute max. speed	10000 min <sup>-1</sup>	10000 min <sup>-1</sup>	10000 min <sup>-1</sup>
Torque	≤ 0.2 Ncm	≤ 0.3 Ncm	≤ 0.5 Ncm
Protection class housing/bearing	IP 64/64	IP 64/64	IP 65/64, IP 67/67
General design	as per DIN VDE 0160, protection class III	as per DIN VDE 0160, protection class III	as per DIN VDE 0160, protection class III
Operating temperature	-10 ... +70 °C	-10 ... +70 °C	RI 58-O: -10 ... +70 °C/ RI 58-T: -25 ... +100 °C
Connection	Cable axial/radial	Cable or connector axial/radial	Cable or connector axial/radial
Size	Ø 30 mm	Ø 36 mm	Ø 58 mm, square fl.=63.5 mm/80mm
Weight approx.	60 g	80 g	300 g
<b>Technical Data - electrical</b>			
Output	RS 422/push-pull	RS 422/push-pull	RS 422/push-pull/ push-pull complementary
Supply voltage (SELV)	DC 5V/DC 10 - 30 V	DC 5V/DC 10 - 30 V	DC 5V/DC 10 - 30 V
Max. current w/o load	40 mA (DC 5V), 30 mA (DC 24 V), 60 mA (DC 10 V)	40 mA (DC 5V), 30 mA (DC 24 V), 60 mA (DC 10 V)	40 mA (5VDC), 30 mA (DC 24 V), 60 mA (10VDC)
Max. pulse frequency	300 kHz (RS 422) 200 kHz (push-pull)	300 kHz (RS 422) 200 kHz (push-pull)	300 kHz (RS 422) 200 kHz (push-pull)
Output load	RS 422: ±30 mA push-pull with short circuit protection: 30 mA (DC 10 - 30 V)	RS 422: ±30 mA push-pull with short circuit protection: 30 mA (DC 10 - 30 V)	RS 422: ±30 mA push-pull with short circuit protection: 30 mA (DC 10 - 30 V)
Alarm output	NPN-O.C. 5 mA	NPN-O.C. 5 mA	NPN-O.C. 5 mA
Pulse shape	Square wave	Square wave	Square wave
Pulse duty factor	1 : 1	1 : 1	1 : 1
Page	45	49	52

# Incremental Encoders - Industrial types

## Hollow shaft



Type	RI 36-H	RI 58-H	RI 58-D
<b>Special features</b>	<ul style="list-style-type: none"> <li>■ miniature industry encoder for high numbers of pulses</li> <li>■ short mounting depth</li> <li>■ easy mounting procedure</li> <li>■ applications, e.g. motors, machine tools, packaging machines, robots, automated SMD equipment</li> </ul>	<ul style="list-style-type: none"> <li>■ through hollow shaft</li> <li>■ high accuracy due to integrated coupling</li> <li>■ secure shaft mounting</li> <li>■ applications e.g. textile machinery, motors, drives, copiers</li> </ul>	<ul style="list-style-type: none"> <li>■ direct mounting without coupling</li> <li>■ flexible hollow shaft concept up to 14 mm</li> <li>■ through hollow shaft or as end shaft (blind shaft)</li> <li>■ operating temperature up to 100 °C (RI 58 TD)</li> <li>■ applications, e.g. positioning drives, motors</li> </ul>
<b>Number of pulses</b>	5 ... 3600	1 ... 5000	1 ... 5000
<b>Technical Data - mechanical</b>			
Flange or shaft fixing	Clamping shaft (one side open) with front clamping ring; hubshaft with tether as torque support	S = synchro flange	E = synchro flange with blind shaft F, D, H= synchro flange with clamping shaft
Shaft diameter	Hollow shaft 4 / 6 / 8 / 10 mm	Hollow shaft 10 mm/12 mm	Hollow shaft 10 mm/12 mm/14 mm
Absolute max. shaft load	misalignment radial $\pm 0.15$ mm, misalignment axial $\pm 0.5$ mm,	misalignment axial $\pm 0.4$ mm misalignment parallel 0,4 mm misalignment angular 1°	
Absolute max. speed	10 000 min <sup>-1</sup>	3 000 min <sup>-1</sup>	6 000 min <sup>-1</sup>
Torque	$\leq 0.3$ Ncm	$\leq 2$ Ncm	$\leq 1.7$ Ncm
Protection class housing/bearing	IP 64/64	IP 64/64	IP 65/64
General design	as per DIN VDE 0160, protection class III	as per DIN VDE 0160, protection class III	as per DIN VDE 0160, protection class III
Operating temperature	-10 ... +70 °C	-10 ... +70 °C	-10 ... +70 °C (Option: -25 .. +100 °C)
Connection	Cable axial/radial	Cable radial	Cable or connector radial
Size	Ø 36 mm	Ø 58 mm	Ø 58 mm
Weight approx.	80 g	210 g	170 g
<b>Technical Data - electrical</b>			
Output	RS 422 / push-pull / push-pull complementary	RS 422 / push-pull / push-pull complementary	RS 422 / push-pull / push-pull complementary
Supply voltage (SELV)	DC 5 V / DC 10 - 30 V	DC 5 V / DC 10 - 30 V	DC 5 V / DC 10 - 30 V
Max. current w/o load	40 mA (DC 5 V), 30 mA (DC 24 V), 60 mA (DC 10 V)	40 mA (DC 5 V), 30 mA (DC 24 V), 60 mA (DC 10 V)	40 mA (DC 5 V), 30 mA (DC 24 V), 60 mA (DC 10 V)
Max. pulse frequency	300 kHz (RS 422) 200 kHz (push-pull)	300 kHz (RS 422) 200 kHz (push-pull)	300 kHz (RS 422) 200 kHz (push-pull)
Output load	RS 422: $\pm 30$ mA push-pull with short circuit protection: 30 mA (DC 10 - 30 V)	RS 422: $\pm 30$ mA push-pull with short circuit protection: 30 mA (DC 10 - 30 V)	RS 422: $\pm 30$ mA push-pull with short circuit protection: 30 mA (DC 10 - 30 V)
Alarm output	NPN-O.C. 5 mA	NPN-O.C. 5 mA	NPN-O.C. 5 mA
Pulse shape	Square wave	Square wave	Square wave
Pulse duty factor	1 : 1	1 : 1	1 : 1
<b>Page</b>	60	63	66

# Incremental Encoders - Industrial types

## Hollow shaft



Type	RI 76 TD	RI 80-E
<b>Special features</b>	<ul style="list-style-type: none"> <li>■ through hollow shaft</li> <li>■ shaft diameters 15 to 42 mm</li> <li>■ external diameter only 76 mm</li> <li>■ simple installation with clamping ring front or rear</li> <li>■ operating temperature up to 100 °C</li> <li>■ applications e.g. motors, printing machines, elevators</li> </ul>	<ul style="list-style-type: none"> <li>■ Incremental Output</li> <li>■ 30...45 mm hollow shaft</li> <li>■ Rugged mechanical design</li> <li>■ Unbreakable disc</li> <li>■ Integrated diagnostic system</li> <li>■ Wide voltage range 5 ... 30 V</li> </ul>
<b>Number of pulses</b>	1 ... 10 000	1024, 2048, 4096 other number of pulses on request
<b>Technical Data - mechanical</b>		
Shaft fixation	Clamping ring front or rear	Keyway, set screw
Coupling	stator coupling (hubshaft with tether)	Spring tether (single, double)
Shaft diameter	Hollow shaft 15 ... 42 mm	
Max. speed	6 000 min <sup>-1</sup> (depends on version)	3 600 min <sup>-1</sup> (IP50), 1 500 min <sup>-1</sup> (IP64)
Torque	3 ... 10 Ncm (depends on version)	
Protection class housing/bearing	IP 50/40 (Option: IP 65/64)	IP50, IP64
General design	as per DIN EN 61010 protection class III	as per DIN EN 61010, protection class III, Contamination level 2, over voltage class II
Operating temperature	-25 ... +100 °C	-20 ... +70 °C
Connection	Cable radial	Sub-D 15p. / cable, radial
Size	Ø 76 mm	
Weight approx.	320 ... 580 g (depends on version)	1 000 g
<b>Technical Data - electrical</b>		
Output	RS 422 / push-pull / push-pull complementary	RS 422 / push-pull / push-pull complementary
Supply voltage (SELV)	DC 5 V / DC 10 - 30 V	DC 5 V ±10% or DC 10 - 30 V
Max. current w/o load	40 mA (DC 5 V), 30 mA (DC 24 V), 60 mA (DC 10 V)	60 mA (DC 5 V), 60 mA (DC 10 V), 35 mA (DC 24 V)
Max. pulse frequency	300 kHz (RS 422) 200 kHz (push-pull)	600 kHz (RS 422) 200 kHz (push-pull)
Output load	RS 422: ±30 mA push-pull with short circuit protection: 30 mA (DC 10 - 30 V)	RS 422: ±30 mA push-pull with short circuit protection: 40 mA (DC 10 - 30 V)
Alarm output	NPN-O.C. 5 mA	NPN-O.C. 5 mA
Pulse shape	Square wave	Square wave
Pulse duty factor	1 : 1	1 : 1
Page	72	76

## Incremental Encoders - Economy types



Type	PC 9 / PC 9S
<b>Special features</b>	<ul style="list-style-type: none"> <li>■ Provides digital control inputs from operators's panel</li> <li>■ Bidirectional squarewave signal outputs</li> <li>■ Up to 512 increments</li> <li>■ Continuous and reversible rotation</li> <li>■ Noncontacting</li> <li>■ Operating temperature -40 ... 100 °C</li> </ul>
<b>Number of pulses</b>	100 ... 512
<b>Technical Data - mechanical</b>	
Absolute max. shaft load	1/8" Shaft: 4 N axial, 27 N radial 1/4" Shaft: 4 N axial, 4 N radial
Moment of inertia	0.20 gcm <sup>2</sup>
Operating temperature	-40 ... +100 °C
Storage temperature	-50 ... +125 °C
Relative humidity	90 %, non-condensing
Connection	PC9: 10 pole header, (Accessory: 30 cm ribbon cable with connector) PC9S: 5 pole header, (Accessory: 30 cm cable with connector)
<b>Technical Data - electrical</b>	
Code	Inkremental, optical
Phasing	90° ±18° electrical
Symmetry	180° ±18° electrical
Index pulse width	90° ±36° electrical
Supply voltage	DC 5 V ±10 %
Supply current	10 mA, typical
Standby current	max. 50 µA (PC9 only)
Output signals	min. 2.5 V high (V <sub>OH</sub> ) max. 0.5 V low (V <sub>OL</sub> )
Output current	PC9: 3 mA sink/source (25 °C), 2 mA (100 °C) PC9S: 6 mA sink/source (25 °C), 4 mA (100 °C)
Max. pulse frequency	200 kHz
Pulse shape	Square wave
Pulse duty factor	1:1
Page	79

## Incremental Encoders - Economy types



Type	RI 32	RI 38	RI 41
<b>Special features</b>	<ul style="list-style-type: none"> <li>■ economy encoder for small devices</li> <li>■ long life due to ball bearings</li> <li>■ low torque</li> <li>■ application e.g. laboratory devices, fitness machines, crimping machines, tampon printing machines, small grinding machines</li> </ul>	<ul style="list-style-type: none"> <li>■ encoder for universal mounting due to front or rear fixing</li> <li>■ long life due to ball bearings</li> <li>■ low torque</li> <li>■ applications e.g. small motors, laboratory devices, labelling devices, plotters, length measuring machines</li> </ul>	<ul style="list-style-type: none"> <li>■ economy encoder</li> <li>■ high mechanical life</li> <li>■ applications e.g. small motors, graphic machines, desktop robots, wood working machines</li> </ul>
<b>Number of pulses</b>	5 ... 1500	5 ... 1024	5 ... 3600
<b>Technical Data - mechanical</b>			
Flange	R = pilot flange	Q = square flange	R = pilot flange
Shaft diameter	5 mm/6 mm	6 mm	6 mm
Absolute max. shaft load	radial 10 N, axial 5 N	radial 10 N, axial 5 N	radial 10 N, axial 5 N
Absolute max. speed	6 000 min <sup>-1</sup>	10 000 min <sup>-1</sup>	10 000 min <sup>-1</sup>
Torque	≤ 0.05 Ncm	≤ 0.2 Ncm	
Protection class housing/bearing	IP 50/40	IP 50/40	IP 50/40
General design	as per DIN VDE 0160, protection class III	as per DIN VDE 0160, protection class III	as per DIN VDE 0160, protection class III
Operating temperature	-10° ... +60 °C	-10° ... +60 °C	-10° ... +70 °C
Connection	Cable radial/axial	Cable radial	Cable radial
Size	Ø 30 mm	39 x 39 mm	Ø 40 mm
Weight approx.	50 g	60 g	60 g
<b>Technical Data - electrical</b>			
Output	push-pull	push-pull	push-pull
Supply voltage (SELV)	DC 5V or DC 10 - 30 V	DC 5V or DC 10 - 30 V	DC 5V or DC 10 - 30 V
Max. current w/o load	40 mA (DC 5V), 30 mA (DC 24 V)	40 mA (DC 5V), 30 mA (DC 24 V)	40 mA (DC 5V), 30 mA (DC 24 V)
Max. pulse frequency	300 kHz (DC 5V) 200 kHz (DC 10 - 30 V)	300 kHz (DC 5V) 200 kHz (DC 10 - 30 V)	300 kHz (DC 5V) 200 kHz (DC 10 - 30 V)
Output load	push-pull with short circuit protection: 10 mA (DC 5V), 30 mA (DC 10 - 30 V)	push-pull with short circuit protection: 10 mA (DC 5V), 30 mA (DC 10 - 30 V)	push-pull with short circuit protection: 10 mA (DC 5V), 30 mA (DC 10 - 30 V)
Alarm output	NPN-O.C. 5 mA	NPN-O.C. 5 mA	NPN-O.C. 5 mA
Pulse shape	Square wave	Square wave	Square wave
Pulse duty factor	1 : 1	1 : 1	1 : 1
<b>Page</b>	82	84	86

## Incremental Encoders - Economy types



Type	RI 42
<b>Special features</b>	<ul style="list-style-type: none"> <li>■ economy encoder</li> <li>■ high protection IP 65</li> <li>■ push-pull or NPN-O.C.</li> <li>■ applications, e.g. textile machinery</li> </ul>
<b>Number of pulses</b>	5 ... 1 024
<b>Technical Data - mechanical</b>	
Flange	R = pilot flange
Shaft diameter	6 mm
Absolute max. shaft load	radial 10 N, axial 5 N
Absolute max. speed	10 000 min <sup>-1</sup>
Torque	≤ 1 Ncm
Protection class housing/bearing	IP 65/64
General design	as per DIN VDE 0160, protection class III
Operating temperature	0° ... +60 °C
Connection	Cable axial
Size	Ø 40 mm
Weight approx.	75 g
<b>Technical Data - electrical</b>	
Output	push-pull / push-pull complementary / NPN-O.C.
Supply voltage (SELV)	DC 5 V / DC 10 - 30 V / DC 10 - 24 V
Max. current w/o load	40 mA (DC 5 V), 30 mA (DC 24 V)
Max. pulse frequency	300 kHz (5 V) 200 kHz (DC 10 - 30 V) 50 kHz (DC 10 - 24 V)
Output load	push-pull with short circuit protection: 10 mA (DC 5 V), 30 mA (DC 10 - 30 V)
Alarm output	NPN-O.C. 5 mA
Pulse shape	Square wave
Pulse duty factor	1 : 1
Page	88

# Incremental EX and Stainless Steel Encoders



Type	RX 70-TI / RX 71-TI (Stainless)	RI 59
<b>Special features</b>	<ul style="list-style-type: none"> <li>■ explosion-proof according to EX II 2 G/D EEX d IIC T6/T4</li> <li>■ highest operating safety</li> <li>■ applications e.g. lacquering lines, surface processing machines, filling plants, mixing machines, silo systems</li> </ul>	<ul style="list-style-type: none"> <li>■ stainless steel encoder with high degree of protection</li> <li>■ high corrosion resistance</li> <li>■ suitable for use in food production</li> <li>■ applications e.g. packaging machinery, filling plants, washing systems, mixing machines</li> </ul>
<b>Number of pulses</b>	1 ... 10 000	1 ... 10 000
<b>Technical Data - mechanical</b>		
Flange	K = clamping flange	Q = square flange
Shaft diameter	10 mm	9.52 mm / 10 mm
Max. shaft load	radial 100 N, axial 40 N	radial 60 N, axial 40 N
Max. speed	6 000 min <sup>-1</sup> (T6), 10 000 min <sup>-1</sup> (T4)	10 000 min <sup>-1</sup>
Torque	≤ 0.5 Ncm	≤ 0.5 Ncm
Protection class housing/bearing	IP 65/64	IP 67/67
General design	as per DIN VDE 0160, protection class III	as per DIN VDE 0160, protection class III
Operating temperature	-10 ... + 40 °C	-10 ... + 70 °C
Connection	Cable axial	Cable radial
Size	Ø 70 mm	Ø 58 mm, square flange = 63.5 mm
Weight approx.	1400 g	620 g
<b>Technical Data - electrical</b>		
Output	RS 422/push-pull/push-pull complementary	RS 422/push-pull/push-pull complementary
Supply voltage (SELV)	DC 5 V/DC 10 - 30 V	DC 5 V/DC 10 - 30 V
Max. current w/o load	40 mA (DC 5 V), 30 mA (DC 24 V), 60 mA (DC 10 V)	40 mA (DC 5 V), 30 mA (DC 24 V), 60 mA (DC 10 V)
Max. pulse frequency	300 kHz (RS 422) 200 kHz (push-pull)	300 kHz (RS 422) 200 kHz (push-pull)
Output load	RS 422: ±30 mA push-pull with short circuit protection: 30 mA (DC 10 - 30 V)	RS 422: ±30 mA push-pull with short circuit protection: 30 mA (DC 10 - 30 V)
Alarm output	NPN-O.C. 5 mA	NPN-O.C. 5 mA
Pulse shape	Square wave	Square wave
Pulse duty factor	1 : 1	1 : 1
Pulse width error	± max. 25° electrical	± max. 25° electrical
<b>Page</b>	90	93

## Incremental Sine-Wave Encoders



Type	RIS 58-0	RIS 58-H
<b>Special features</b>	<ul style="list-style-type: none"> <li>■ Harmonic distortion less than 1 %</li> <li>■ Extended temperature range, -40° up to +100 °C</li> <li>■ 500 kHz sine-wave incremental signal frequency response</li> <li>■ Self-monitoring and error compensation</li> <li>■ Secure against short-circuit and overload</li> </ul>	<ul style="list-style-type: none"> <li>■ Harmonic distortion less than 1 %</li> <li>■ Extended temperature range, -40° up to +100 °C</li> <li>■ 500 kHz sine-wave incremental signal frequency response</li> <li>■ Self-monitoring and error compensation</li> <li>■ Secure against short-circuit and overload</li> </ul>
<b>Number of pulses</b>	1 000, 1 024, 2 048, 2 500	1 000, 1 024, 2 048, 2 500, 5 000
<b>Technical Data - mechanical</b>		
Shaft diameter	6 mm	10 mm, 12 mm hollow shaft
Absolute max. shaft load	radial 60 N/ axial 40 N	
Balance tolerances		axial ±1.5 mm, radial ±0.2 mm
Max. speed	12 000 min <sup>-1</sup>	12 000 min <sup>-1</sup>
Torque	≤ 1 Ncm	≤ 1 Ncm
Protection (EN 60529)	Bearing IP 64, Housing IP 65	Bearing IP 64, Housing IP 65
General design	as per DIN EN 61010-1	as per DIN EN 61010-1
Operating temperature	-40 ... +100 °C	-40 ... +100 °C
Vibration (IEC 68-2-6)	≤ 100 m/s <sup>2</sup>	≤ 100 m/s <sup>2</sup>
Shock (IEC 68-2-27)	≤ 1 000 m/s <sup>2</sup>	≤ 1 000 m/s <sup>2</sup>
Material housing	Aluminium	Aluminium
Connection	Cable axial or radial Conin axial or radial	Cable axial or radial Conin axial or radial
Size	Ø 58 mm	Ø 58 mm
Weight approx.	265 g	270 g
<b>Technical Data - electrical</b>		
Supply voltage (SELV)	DC 5 V / ±10 %	DC 5 V / ±10 %
Max. current w/o load	120 mA	120 mA
Incremental signals A, B	Sinus-Cosinus 1 V <sub>ss</sub>	Sinus-Cosinus 1 V <sub>ss</sub>
Absolute accuracy	±35"	±35"
Repeatability	±7"	±7"
Max. frequency	500 kHz	500 kHz
Reference signal: R	> 0,4 V (1 pulse / turn)	> 0,4 V (1 pulse / turn)
Page	95	97

## Industrial types

## Solid shaft



- Miniature encoder for industrial use
- Low current consumption
- High noise interference immunity
- Cable lengths of up to 100 m
- Suitable for high pulse frequencies
- High protection class
- Application e.g.:  
CNC machines, manipulators, motors,  
medical technology, textile machines

### NUMBER OF PULSES

5 / 10 / 20 / 25 / 30 / 50 / 60 / 100 / 120 / 128 / 200 / 250 / 256 / 288 / 300 / 360 / 400 / **500** / **512** / 600 / 720 / 900 / **1000** / 1024 / 1250 / 1500

Other number of pulses on request

Preferably available versions are printed in bold type.

### TECHNICAL DATA mechanical

Shaft diameter	5 mm
Absolute max. shaft load	radial 10 N, axial 5 N
Absolute max. speed	max. 10 000 min <sup>-1</sup>
Torque	≤ 0.2 Ncm
Moment of inertia	approx. 0.8 gcm <sup>2</sup>
Protection class (EN 60529)	Housing IP 64, bearings IP 64
Operating temperature	-10 ... +70 °C
Storage temperature	-25 ... +85 °C
Vibration resistance	100 m/s <sup>2</sup> (10 ... 2000 Hz)
Shock resistance	1 000 m/s <sup>2</sup> (6 ms)
Connection	1.5 m cable radial/axial <sup>1</sup> , connector axial
Housing	Aluminium
Flange	S = synchro flange, R = pilot flange
Weight	approx. 60 g

<sup>1</sup> Other cable length on request



### TECHNICAL DATA electrical

General design	as per DIN VDE 0160, protection class III, contamination level 2, overvoltage class II	
Supply voltage (SELV)	with RS 422 (R, T): DC 5 V ± 10 % with push-pull (K): DC 10 - 30 V <sup>2</sup>	
Max. current w/o load	40 mA (DC 5 V), 60 mA (DC 10 V), 30 mA (DC 24 V)	
Standard-output versions <sup>3</sup>	RS 422 (R)	A, B, N, $\bar{A}$ , $\bar{B}$ , $\bar{N}$ , Alarm
	RS 422 (T)	A, B, N, $\bar{A}$ , $\bar{B}$ , $\bar{N}$ , Sense
	push-pull (K)	A, B, N, Alarm

<sup>2</sup> Pole protection

<sup>3</sup> Output description and technical data see chapter "Technical basics"



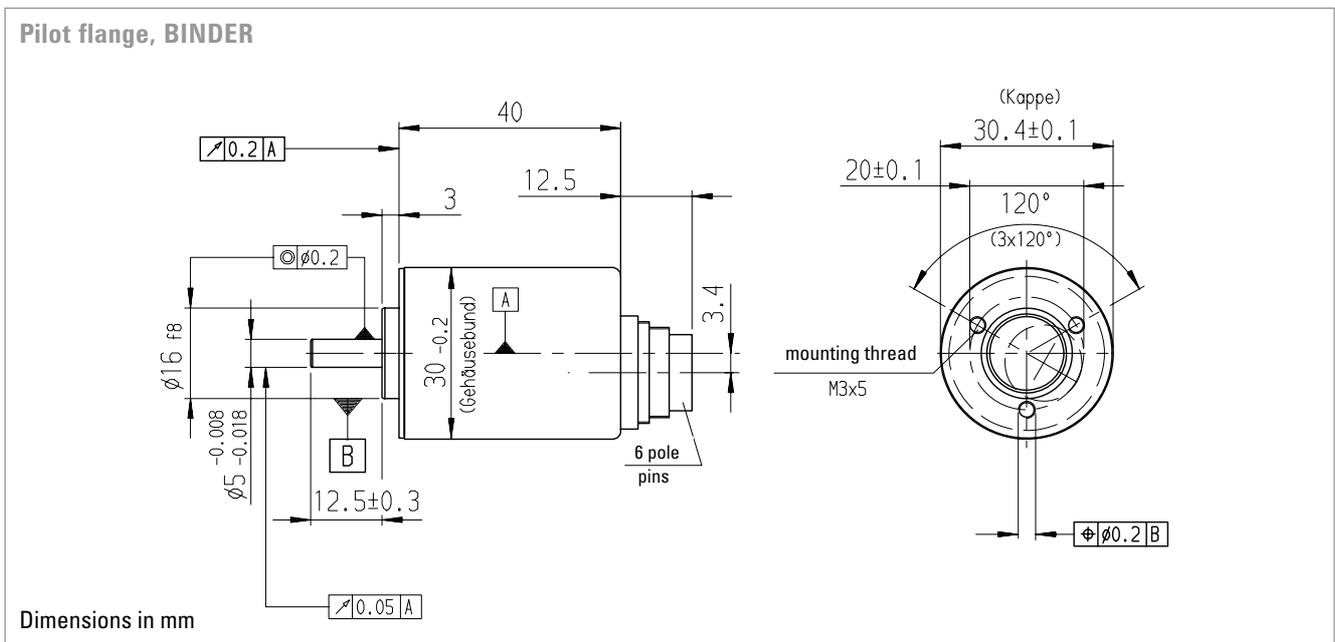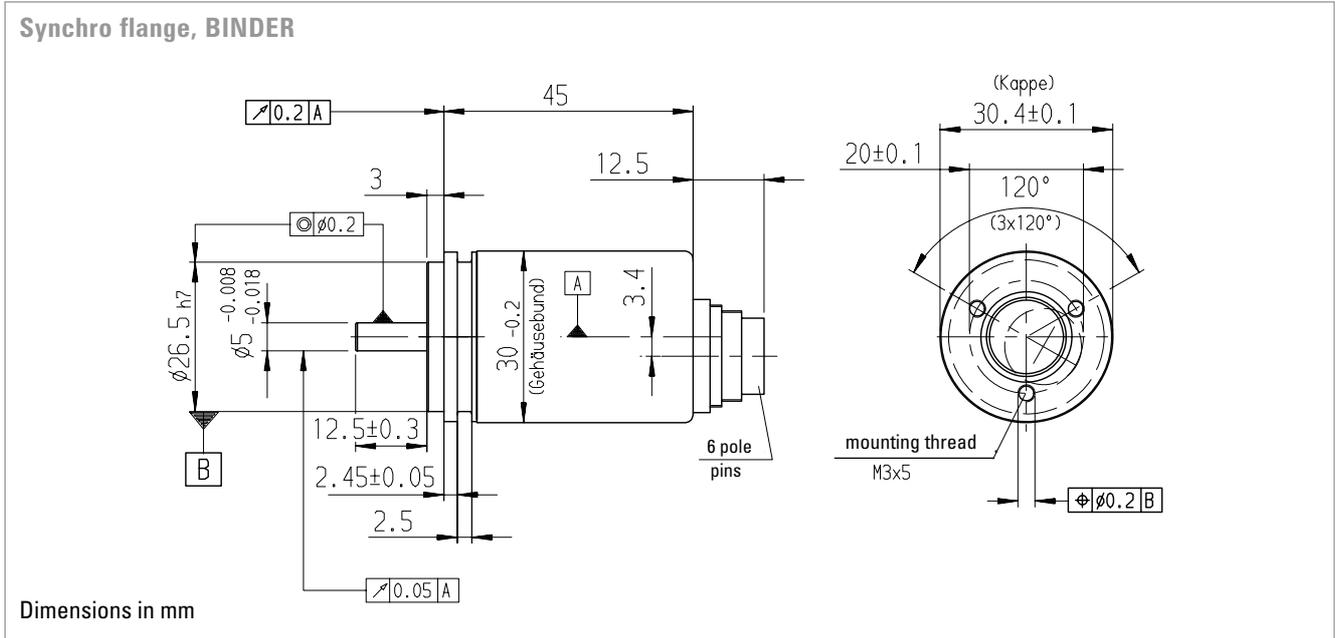

# Incremental Shaft Encoders

# Type RI 30

## Industrial types

## Solid shaft

CONNECTOR 6 POLE  
(BINDER)

Description (push-pull)	Pin
DC 10 - 30 V	1
Channel A	2
Channel N	3
Channel B	4
Alarm	5
GND	6

PIN ASSIGNMENT  
Cable

Description (push-pull)	Description (RS 422)	Lead Ø mm <sup>2</sup>	Colour
DC 10 - 30 VDC	DC 5 V	0.5	red
	Sense V <sub>CC</sub>	0.14	yellow/red
Channel A	Channel A	0.14	white
	Channel $\bar{A}$	0.14	white/brown
Channel B	Channel B	0.14	green
	Channel $\bar{B}$	0.14	green/brown
Channel N	Channel N	0.14	yellow
	Channel $\bar{N}$	0.14	yellow/brown
GND	GND	0.5	black
Alarm	Alarm/Sense GND <sup>1</sup>	0.14	yellow/black
screen <sup>2</sup>	screen <sup>2</sup>		screen <sup>2</sup>

<sup>1</sup> depending on ordering code

<sup>2</sup> connected with encoder housing

## ORDERING INFORMATION

Type	Model	Number of pulses	Supply voltage	Flange, Protection, Shaft	Output	Connection
<input type="checkbox"/>	<input type="checkbox"/>	<input type="text"/>	<input type="checkbox"/>	<input type="text"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>RI30-</b>	<b>O</b> Standard	<b>5 ... 1 500</b>	<b>A</b> DC 5 V <b>E</b> DC 10-30 V (only with push-pull)	<b>S.34</b> Synchro, IP64, 5 mm <b>R.34</b> Pilot, IP64, 5 mm	<b>T</b> RS422 + Sense <b>K</b> push-pull short circuit proof <b>R</b> RS422 + Alarm	<b>A</b> Kabel axial <b>B</b> Kabel radial <b>N</b> BINDER <sup>1</sup> 6 pole, axial (only push-pull)
<sup>1</sup> encoder connector with pins						

## Industrial types

## Solid shaft



## NUMBER OF PULSES

- Miniature industry standard encoder for high numbers of pulses
- High reliability
- Application e.g.:
  - CNC axles
  - Machine tools
  - Robots
  - Special purpose machines
  - High-speed winding machines

5 / 10 / 20 / 25 / 28 / 32 / 50 / 60 / 72 / 100 / 128 / 144 / 200 / 250 / 256 / 288 / 300 / 360 / 400 / 500 / 512 / 600 / 720 / 900 / 1000 / 1024 / 1250 / 1500 / 2000 / 2048 / 2500 / 3000 / 3600  
Other number of pulses on request

TECHNICAL DATA  
mechanical

Shaft diameter	6 mm / 6.35 mm
Absolute max. shaft load	radial 10 N, axial 5 N
Absolute max. speed	max. 10 000 min <sup>-1</sup>
Torque	≤ 0.3 Ncm
Moment of inertia	approx. 2.8 gcm <sup>2</sup>
Protection class (EN 60529)	Housing IP 64, bearings IP 64
Operating temperature	-10 ... +70 °C
Storage temperature	-25 ... +85 °C
Vibration resistance	100 m/s <sup>2</sup> (10 ... 2000 Hz)
Shock resistance	1 000 m/s <sup>2</sup> (6 ms)
Connection	1.5 m cable <sup>1</sup> or connector, axial or radial
Housing	Aluminium
Flange	S = synchro flange, R = pilot flange
Weight	approx. 80 g

<sup>1</sup> Other cable length on request

TECHNICAL DATA  
electrical

General design	as per DIN VDE 0160, protection class III, contamination level 2, overvoltage class II	
Supply voltage (SELV)	with RS 422 (R, T):	DC 5 V ± 10 %
	with push-pull (K, I):	DC 10 - 30 V <sup>2</sup>
Max. current w/o load	40 mA (DC 5 V), 60 mA (DC 10 V), 30 mA (DC 24 V)	
Standard output versions <sup>3</sup>	RS 422 (R):	A, B, N, $\overline{A}$ , $\overline{B}$ , $\overline{N}$ , $\overline{Alarm}$
	RS 422 (T):	A, B, N, $\overline{A}$ , $\overline{B}$ , $\overline{N}$ , Sense
	push-pull (K):	A, B, N, $\overline{Alarm}$
	push-pull complementary (I):	A, B, N, $\overline{A}$ , $\overline{B}$ , $\overline{N}$ , $\overline{Alarm}$

<sup>2</sup> Pole protection

<sup>3</sup> Output description and technical data see chapter "Technical basics"

# Incremental Shaft Encoders


## Industrial types

# Type RI 36


## Solid shaft

### DIMENSIONAL DRAWINGS

#### Synchro flange

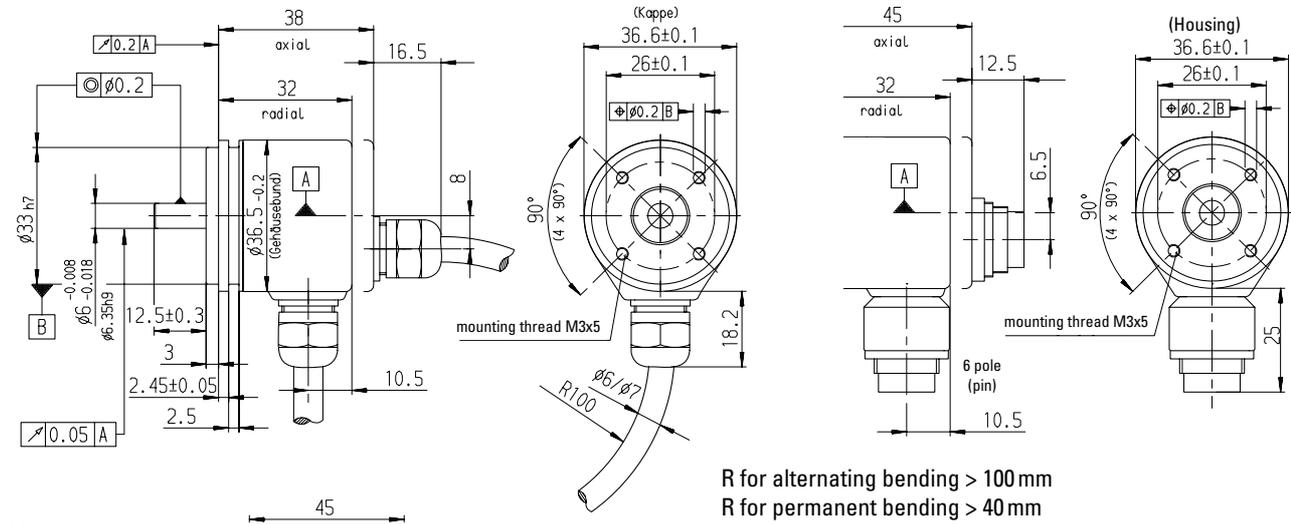


#### Pilot flange

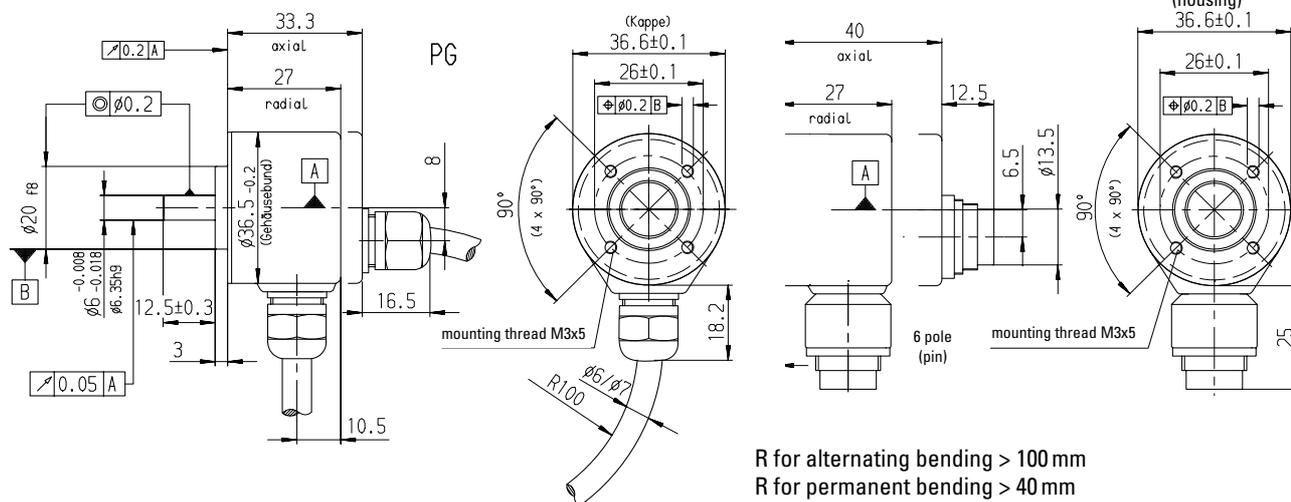

#### CONNECTOR 6 POLE (BINDER)

Description (push-pull)	Pin
DC 10 - 30 V	1
Channel A	2
Channel N	3
Channel B	4
Alarm	5
GND	6



## Industrial types

## Solid shaft

### PIN ASSIGNMENT

Cable PVC (A, B)		Output		
Colour	Lead mm <sup>2</sup>	RS 422 (R, T)	push-pull (K)	push-pull complementary (I)
red	0.5	DC 5 V	DC 10 - 30 V	DC 10 - 30 V
yellow/red	0.14	Sense V <sub>CC</sub>		Sense V <sub>CC</sub>
white	0.14	Channel A	Channel A	Channel A
white/brown	0.14	Channel $\bar{A}$		Channel $\bar{A}$
green	0.14	Channel B	Channel B	Channel B
green/brown	0.14	Channel $\bar{B}$		Channel $\bar{B}$
yellow	0.14	Channel N	Channel N	Channel N
yellow/brown	0.14	Channel $\bar{N}$		Channel $\bar{N}$
black	0.5	GND	GND	GND
yellow/black	0.14	Alarm/Sense GND <sup>1</sup>	Alarm	Alarm
screen <sup>2</sup>		screen <sup>2</sup>	screen <sup>2</sup>	screen <sup>2</sup>

<sup>1</sup> depending on ordering code

<sup>2</sup> connected with encoder housing

### ORDERING INFORMATION

Type	Model	Number of pulses	Supply voltage	Flange, Protection, Shaft	Output	Connection
<input type="checkbox"/>	<input type="checkbox"/>	<input type="text"/>	<input type="checkbox"/>	<input type="text"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>RI36-</b>	<b>O</b> Standard	<b>5 ... 3 600</b>	<b>A</b> DC 5 V <b>E</b> DC 10 - 30 V (only with push-pull)	<b>S.31</b> Synchro, IP64, 6 mm <b>S.35</b> Synchro, IP64, 6.35 mm <b>R.31</b> Pilot, IP64, 6 mm <b>R.35</b> Pilot, IP64, 6.35 mm	<b>T</b> RS422 + Sense <b>K</b> push-pull short circuit proof <b>R</b> RS422 + Alarm <b>I</b> push-pull complementary	<b>A</b> Kabel axial <b>B</b> Kabel radial <b>N</b> BINDER <sup>3</sup> 6 pole, axial (only push-pull) <b>J</b> BINDER <sup>3</sup> , 6 pole, radial (only push-pull)

<sup>3</sup> encoder connector with pins

## Industrial types

## Solid shaft



Synchro flange



Clamping flange

- universeller Industrie-Drehgeber
- Universal industry standard encoder
- Up to 40 000 steps with 10 000 pulses
- High signal accuracy
- Protection class up to IP 67
- Operating temperature up to 100 °C (RI 58-T)
- Flexible due to many flange and configuration variants
- Suitable for high shock ratings
- Application e.g.: Machine tools, CNC axes, packing machines, motors/drives, injection moulding machines, sawing machines, textile machines
- For EX version, see RX 70-I

### NUMBER OF PULSES

RI 58-O

1 / 2 / 3 / 4 / 5 / 10 / 15 / 20 / 25 / 30 / 35 / 40 / 45 / 50 / 60 / 64 / 70 / 72 / 80 / **100** / 125 / 128 / 144 / 150 / 180 / 200 / 230 / **250** / 256 / 300 / 314 / 350 / 360 / 375 / 400 / 460 / 480 / **500** / 512 / 600 / 625 / 635 / 720 / 750 / 900 / **1000** / **1024** / 1200 / **1250** / 1500 / 1600 / 1800 / 2000 / 2048 / **2500** / 3000 / 3480 / **3600** / 3750 / 3968 / 4000 / **4096** / 4800 / **5000** / 5400 / 6000 / 7200 / 7680 / 8000 / 8192 / 9000 / 10000

Other number of pulses on request

Preferably available versions are printed in bold type.

RI 58-T

(high temperature) as above, but only for the range from 4 ... 2500 pulses

Other number of pulses on request

### TECHNICAL DATA mechanical

Shaft diameter	6 mm / 6.35 mm / 7 mm / 12 mm / 10 mm / 9.52 mm	
Absolute max. shaft load	Ø 12 mm	radial 80 N/axial 60 N
	Ø 7...10 mm	radial 60 N/axial 40 N
	Ø 6 mm / 6.35 mm	radial 40 N/axial 20 N
Absolute max. speed	10 000 min <sup>-1</sup>	
Torque	≤ 0.5 Ncm, ≤ 1 Ncm (IP 67)	
Moment of inertia	Synchro flange approx. 14 gcm <sup>2</sup> Clamping flange approx. 20 gcm <sup>2</sup>	
Protection class (EN 60529)	Housing IP 65, bearings IP 64 Housing IP 67, bearings IP 67	
Operating temperature	RI 58-O: -10 ... +70 °C; RI 58-T: -25 ... +100 °C	
Storage temperature	RI 58-O: -25 ... +85 °C; RI 58-T: -25 ... +100 °C	
Vibration resistance (IEC 68-2-6)	100 m/s <sup>2</sup> (10 ... 2 000 Hz)	
Shock resistance (IEC 68-2-27)	1 000 m/s <sup>2</sup> (6 ms)	
Connection	1.5 m cable <sup>1</sup> or connector, axial oder radial	
Housing	Aluminium Ø 58 mm	
Flange	S = synchro flange, K = clamping flange, G, Q = square flange, M = synchro clamping flange	
Weight	approx. 360 g	

<sup>1</sup> Other cable length on request

## Industrial types

## Solid shaft

### TECHNICAL DATA electrical

General design	as per DIN VDE 0160, protection class III, Contamination level 2, over voltage level II		
Supply voltage (SELV)	with RS 422 + Sense (T): DC 5V ± 10 % with RS 422 + Alarm (R): DC 5V ± 10 % oder DC 10 - 30 V <sup>1</sup> with push-pull (K, I): DC 10 - 30 V <sup>1</sup>		
Max. current w/o load	40 mA (DC 5 V), 60 mA (DC 10 V), 30 mA (DC 24 V)		
Standard output versions <sup>2</sup>	RS 422 (R):	A, B, N, $\bar{A}$ , $\bar{B}$ , $\bar{N}$ , Alarm	
	RS 422 (T):	A, B, N, $\bar{A}$ , $\bar{B}$ , $\bar{N}$ , Sense	
	push-pull (K):	A, B, N, Alarm	
	push-pull complementary (I):	A, B, N, $\bar{A}$ , $\bar{B}$ , $\bar{N}$ , Alarm	

<sup>1</sup> Pole protection with supply voltage DC 10-30 V

<sup>2</sup> Output description and technical data see chapter "Technical basics"

### PIN ASSIGNMENT Cable PVC

Cable PVC (A, B) Colour	Output (R, T)	push-pull (K)	push-pull complementary (I)
red	DC 5/10 - 30 V	DC 10 - 30 V	DC 10 - 30 V
yellow/red	Sense V <sub>CC</sub>		Sense V <sub>CC</sub>
white	Channel A	Channel A	Channel A
white/brown	Channel $\bar{A}$		Channel $\bar{A}$
green	Channel B	Channel B	Channel B
green/brown	Channel $\bar{B}$		Channel $\bar{B}$
yellow	Channel N	Channel N	Channel N
yellow/brown	Channel $\bar{N}$		Channel $\bar{N}$
black	GND	GND	GND
yellow/black	Alarm/Sense GND <sup>1</sup>	Alarm	Alarm
screen <sup>2</sup>	screen <sup>2</sup>	screen <sup>2</sup>	screen <sup>2</sup>

<sup>1</sup> depending on ordering code

<sup>2</sup> connected with encoder housing

### PIN ASSIGNMENT Cable TPE

Cable TPE (E, F) Colour	Output (R, T)	push-pull (K)	push-pull complementary (I)
brown/green	DC 5/10 - 30 V	DC 10 - 30 V	DC 10 - 30 V
blue	Sense V <sub>CC</sub>		Sense V <sub>CC</sub>
brown	Channel A	Channel A	Channel A
green	Channel $\bar{A}$		Channel $\bar{A}$
grey	Channel B	Channel B	Channel B
pink	Channel $\bar{B}$		Channel $\bar{B}$
red	Channel N	Channel N	Channel N
black	Channel $\bar{N}$		Channel $\bar{N}$
white/green	GND	GND	GND
violet (white) <sup>1</sup>	Alarm/Sense GND <sup>2</sup>	Alarm	Alarm
screen <sup>3</sup>	screen <sup>3</sup>	screen <sup>3</sup>	screen <sup>3</sup>

<sup>1</sup> white with RS 422 + Sense (T)

<sup>2</sup> depending on ordering code

<sup>3</sup> connected with encoder housing

## Industrial types

## Solid shaft

### CONNECTOR 12 POLE (CONIN)


Pin	RS 422 + Sense (T)	RS 422 + Alarm (R)	push-pull (K)	push-pull complementary (I)	
1	Channel $\bar{B}$	Channel $\bar{B}$	N.C.	Channel $\bar{B}$	 <p>Pin assignment connector counter clockwise (CCW)</p>
2	Sense $V_{CC}$	Sense $V_{CC}$	N.C.	Sense $V_{CC}$	
3	Channel N	Channel N	Channel N	Channel N	
4	Channel $\bar{N}$	Channel $\bar{N}$	N.C.	Channel $\bar{N}$	
5	Channel A	Channel A	Channel A	Channel A	
6	Channel $\bar{A}$	Channel $\bar{A}$	N.C.	Channel $\bar{A}$	
7	N.C.	Alarm	Alarm	Alarm	 <p>connector clockwise (cw)</p>
8	Channel B	Channel B	Channel B	Channel B	
9	N.C. <sup>1</sup>	N.C. <sup>1</sup>	N.C. <sup>1</sup>	N.C. <sup>1</sup>	
10	GND	GND	GND	GND	
11	Sense GND	N.C.	N.C.	N.C.	
12	DC 5 V	DC 5/10 - 30 V	DC 10 - 30 V	DC 10 - 30 V	

<sup>1</sup> screen for cable with CONIN connector

### CONNECTOR 10 POLE (MIL)

Pin	Description RS 422/Euro-pinout (Connection codes O and K)	push-pull	push-pull complementary
1/A	Channel A	Channel A	Channel A
2/B	Channel B	Channel B	Channel B
3/C	Channel N	Channel N	Channel N
4/D	DC 5/10 - 30 V	DC 10 - 30 V	DC 10 - 30 V
5/E	Alarm	Alarm	Alarm
6/F	GND	GND	GND
7/G	Channel $\bar{A}$	screen	Channel $\bar{A}$
8/H	Channel $\bar{B}$	N.C.	Channel $\bar{B}$
9/I	Channel $\bar{N}$	N.C.	Channel $\bar{N}$
10/J	screen	screen	screen



### CONNECTOR 6 POLE (BINDER)

Description (push-pull)	Pin (Stifte)	
DC 10 - 30 V	1	
Channel A	2	
Channel N	3	
Channel B	4	
Alarm	5	
GND	6	

# Incremental Shaft Encoders Industrial types

# Type RI 58 Solid shaft

## DIMENSIONAL DRAWINGS

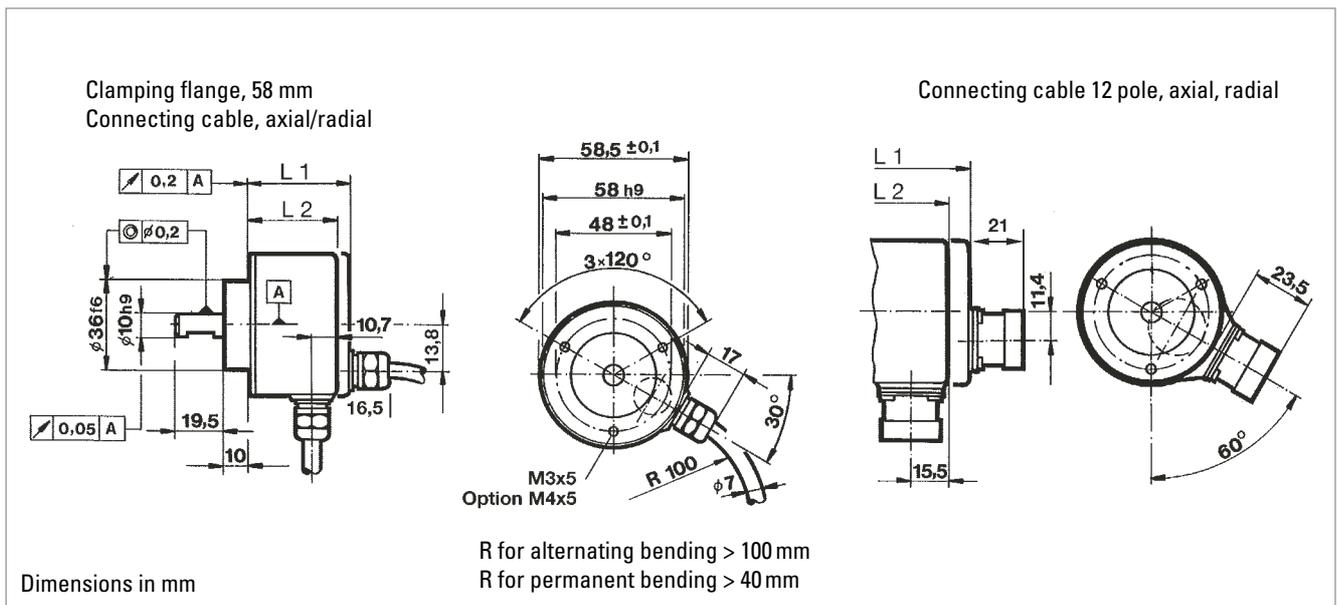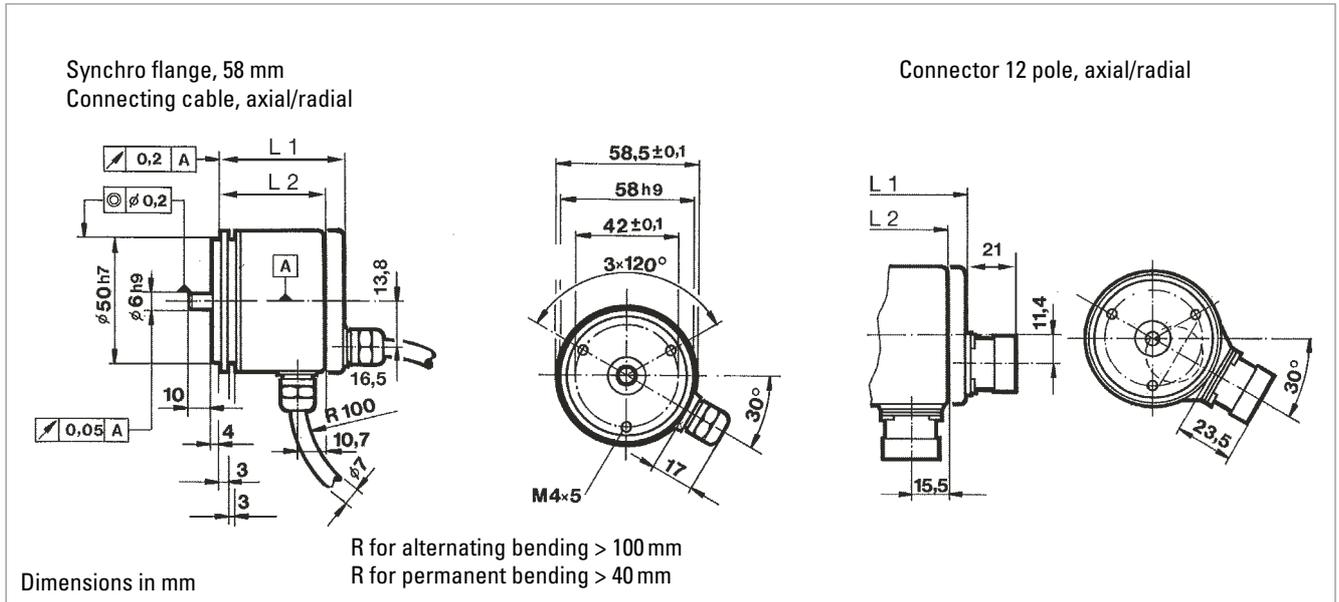

## DIMENSIONS


Typ	Connection	Output	axial L1 mm	radial L2 mm
Synchro flange, 58 mm	cable	R (with $U_B = 5 V$ ), T, K, I	51.5	41.5
		R (with $U_B = 10 - 30 V$ )	56	56
	connector	R (with $U_B = 5 V$ ), T, K, I	57.5	51.5
		R (with $U_B = 10 - 30 V$ )	57.5	56
Clamping flange, 58 mm	cable	R (with $U_B = 5 V$ ), T, K, I	45.5	35.5
		R (with $U_B = 10 - 30 V$ )	50	50
	connector	R (with $U_B = 5 V$ ), T, K, I	51.5	45.5
		R (with $U_B = 10 - 30 V$ )	51.5	50

# Incremental Shaft Encoders Industrial types


# Type RI 58 Solid shaft

## DIMENSIONAL DRAWINGS


**Synchro clamping flange,  
63.5 mm (2.5")**

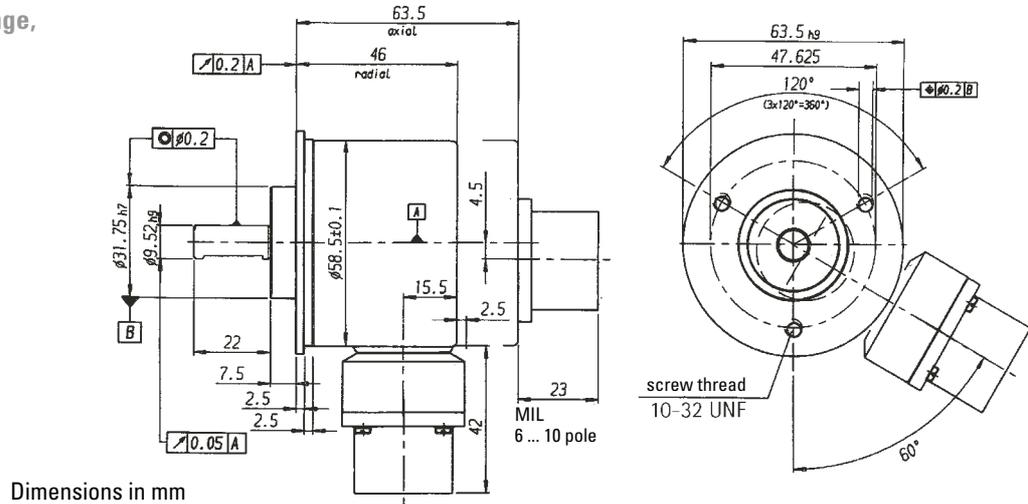

**Square flange,  
63.5 x 63.5 mm (2.5" x 2.5")**

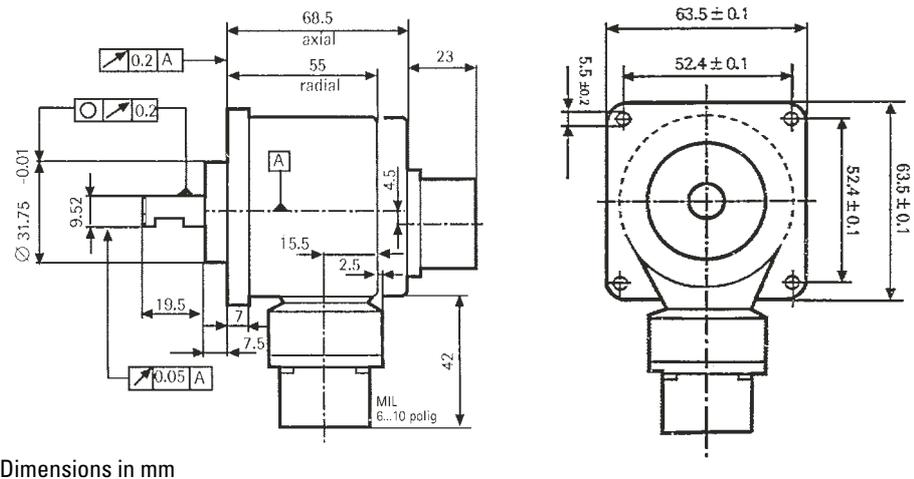

**Square flange, 80 x 80 mm**

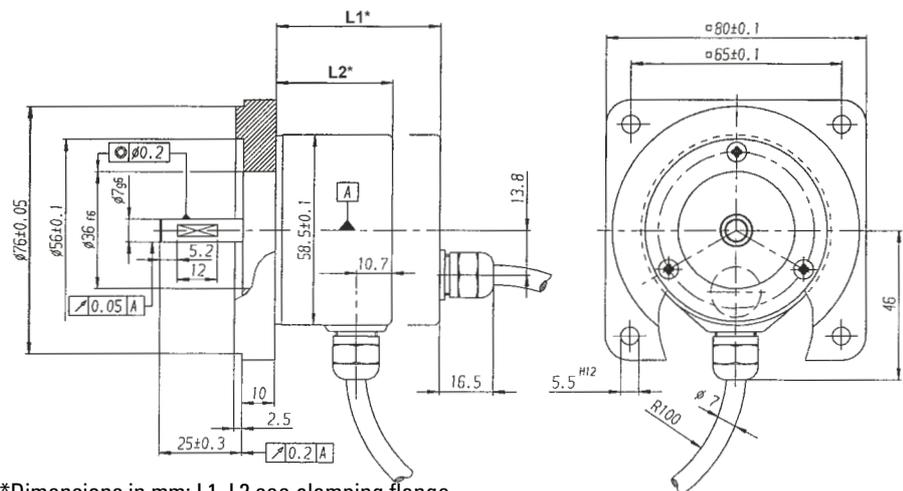

R for alternating bending > 100 mm  
R for permanent bending > 40 mm

\*Dimensions in mm; L1, L2 see clamping flange


# Incremental Shaft Encoders

## Guide for selection

# Type RI 58

## Solid shaft

### STANDARD VERSIONS

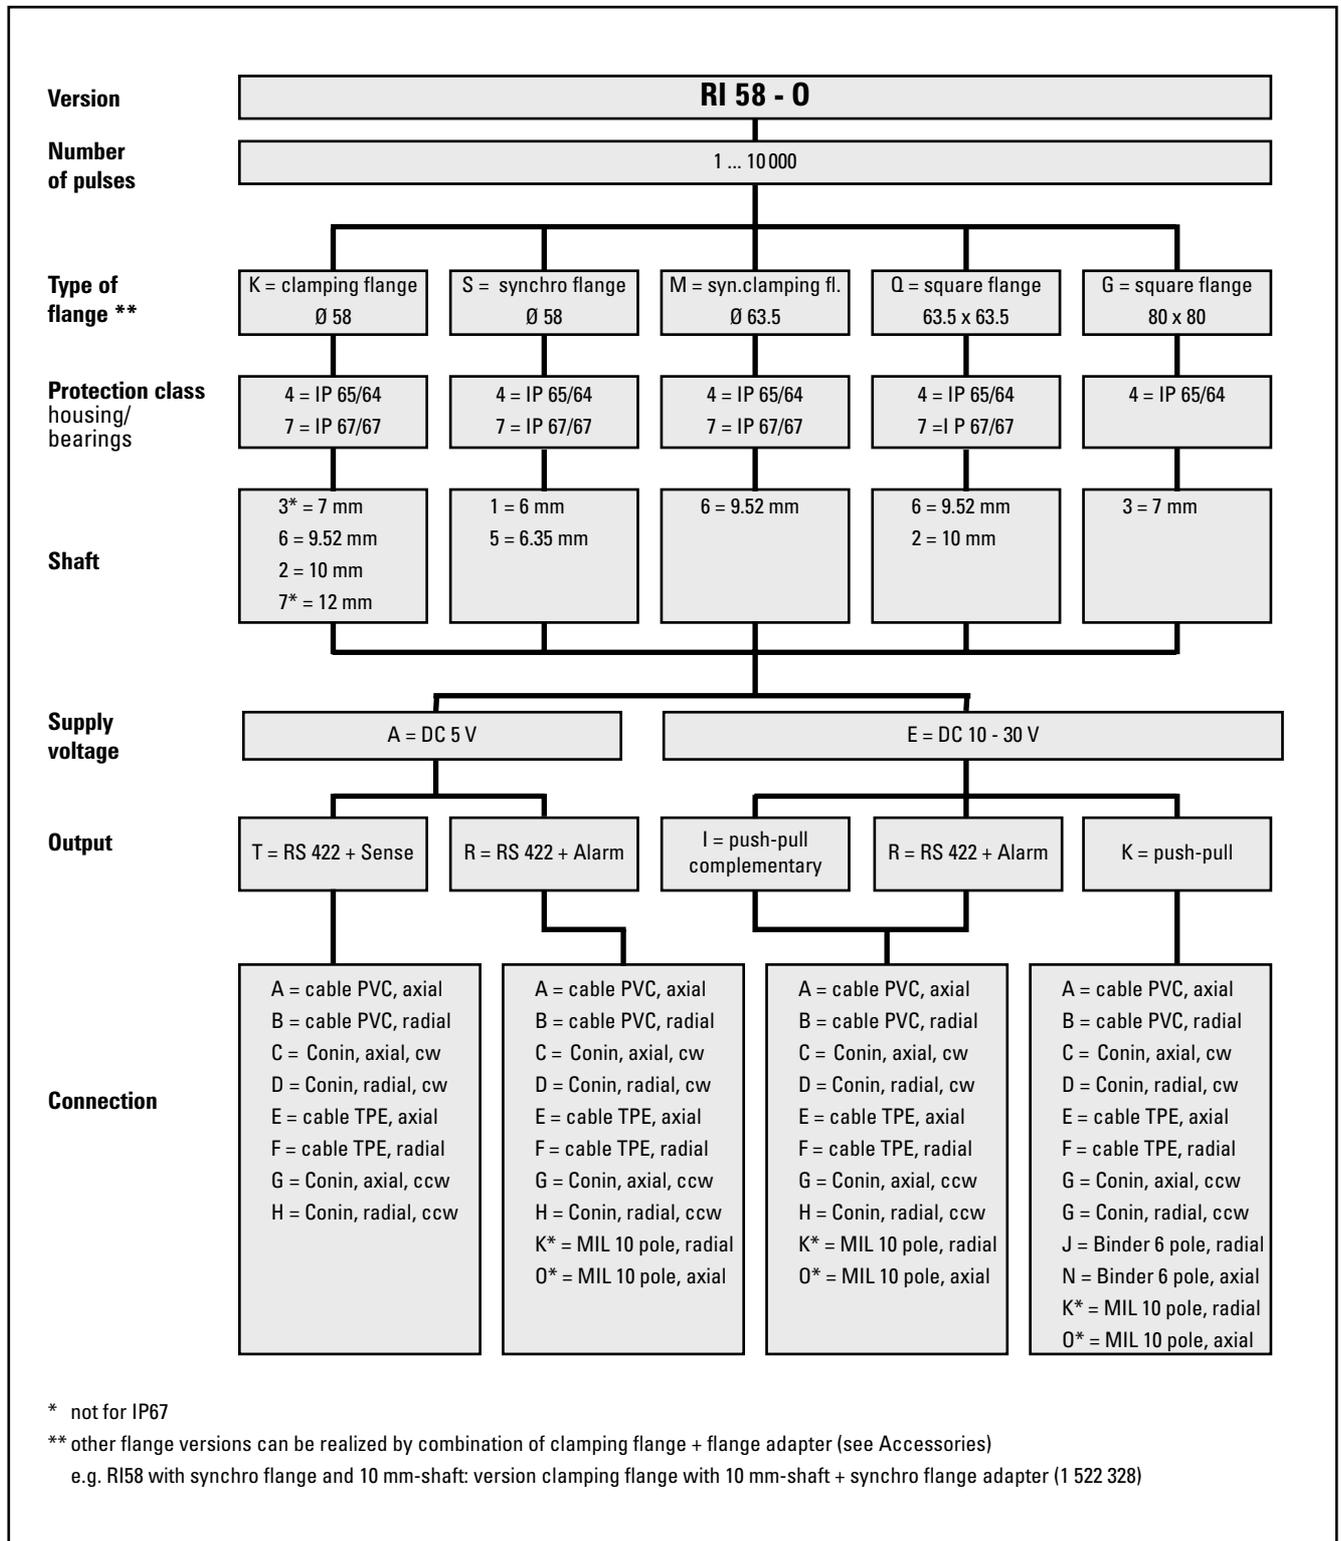


# Incremental Shaft Encoders

## Guide for selection

# Type RI 58

## Solid shaft

STANDARD VERSIONS  
100 °C max. operation temperature

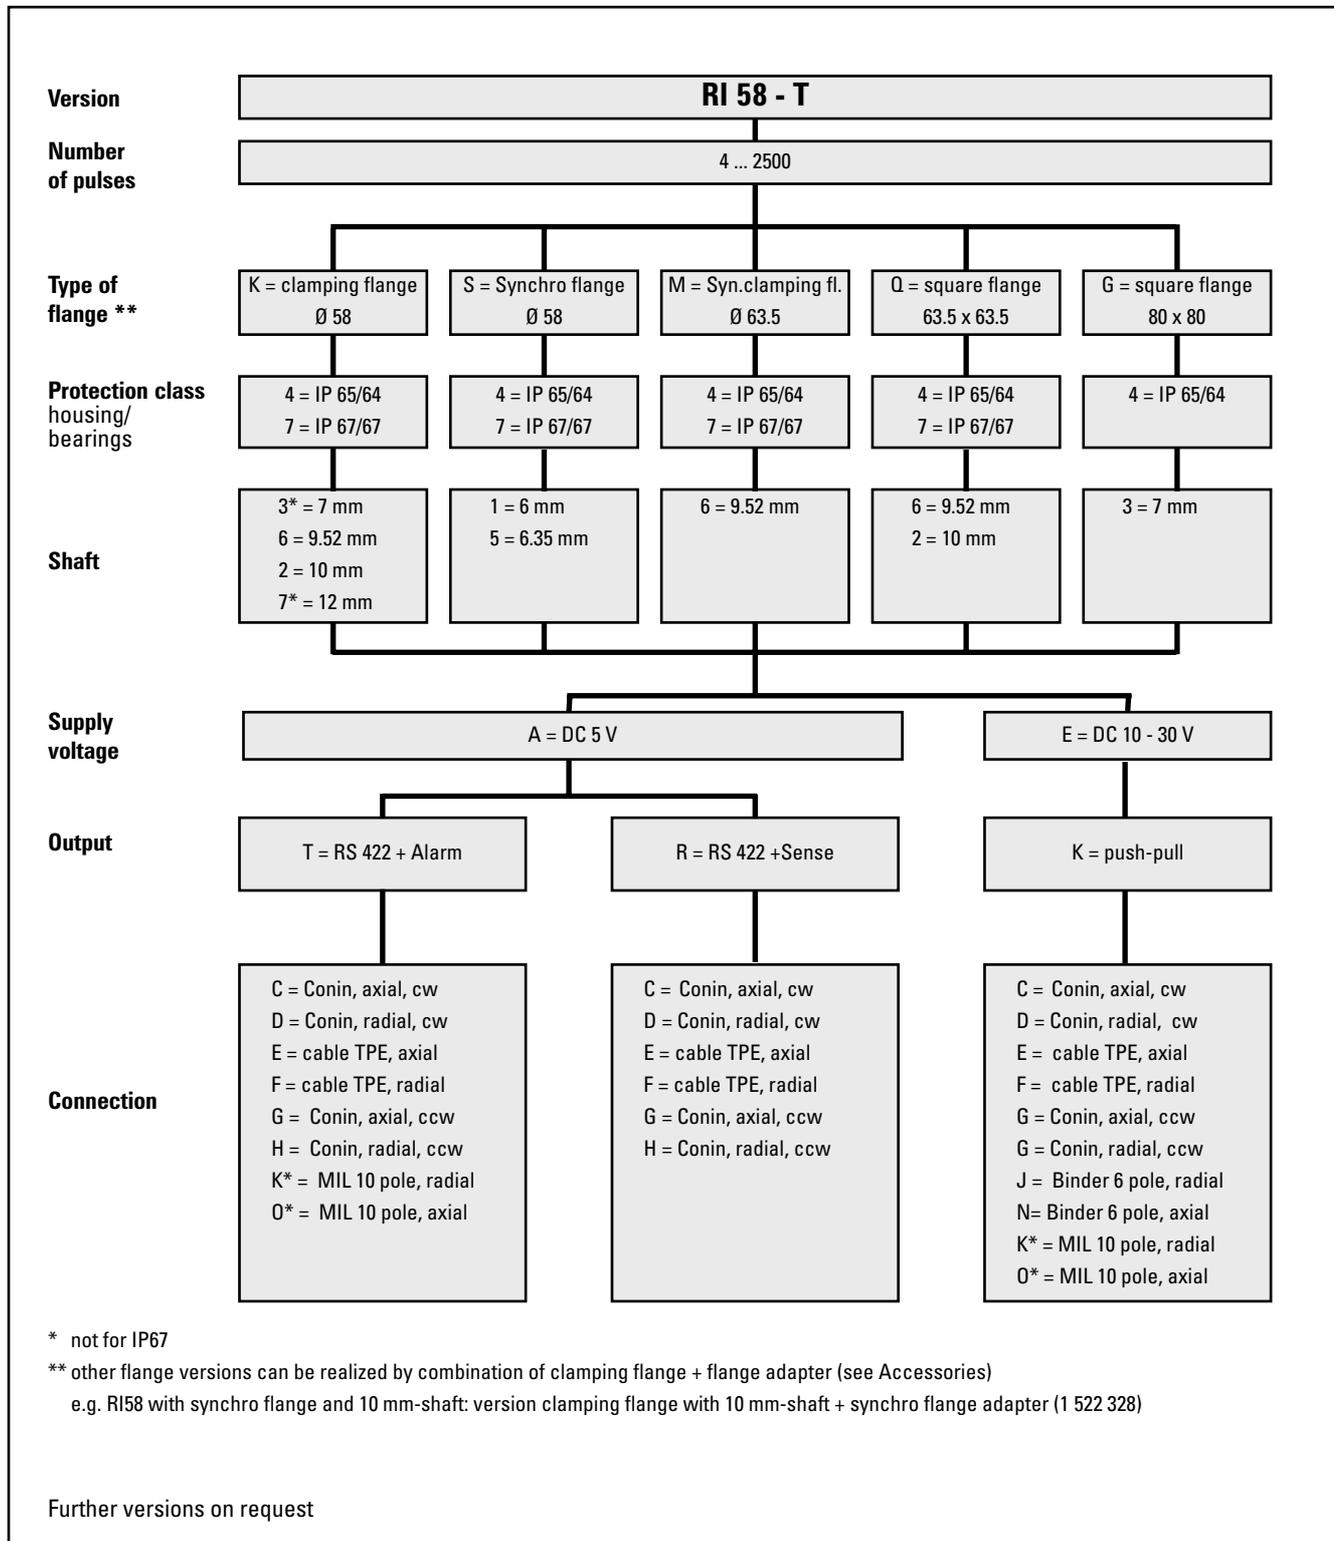

# Incremental Shaft Encoders

## Industrial types

# Type RI 58

## Solid shaft

### ORDERING INFORMATION

Please check „selection guide“ on previous pages as not all combinations are possible!

Type	Model	Number of pulses	Supply voltage	Flange, Protection <sup>1</sup> , Shaft <sup>2</sup>	Output	Connection
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>RI58-</b>	<b>O</b> Standard <b>T</b> High temperature	RI58-O: <b>1 ... 10 000</b>  RI58-T: <b>4 ... 2 500</b>	<b>A</b> DC 5 V <b>E</b> DC 10 - 30 V (only with push-pull)	<b>K.43</b> Clamping Ø58 , IP65/64, 7 mm <b>K.46</b> Clamping Ø58 , IP65/64, 9.52 mm <b>K.42</b> Clamping Ø58 , IP65/64, 10 mm <b>K.47</b> Clamping Ø58 , IP65/64, 12 mm <b>K.76</b> Clamping Ø58 , IP67/67, 9.52 mm <b>K.72</b> Clamping Ø58 , IP67/67, 10 mm <b>S.41</b> Synchro Ø58 , IP65/64, 6 mm <b>S.45</b> Synchro Ø58 , IP65/64, 6.35 mm <b>S.71</b> Synchro Ø58 , IP67/67, 6 mm <b>S.75</b> Synchro Ø58 , IP67/67, 6.35 mm <b>M.46</b> Syn.clamping Ø63.5, IP65/64, 9.52 mm <b>M.76</b> Syn.clamping Ø63.5, IP67/67, 9.52 mm <b>Q.46</b> Square 63.5 x 63.5, IP65/64, 9.52 mm <b>Q.42</b> Square 63.5 x 63.5, IP65/64, 10 mm <b>Q.76</b> Square 63.5 x 63.5, IP67/67, 9.52 mm <b>Q.72</b> Square 63.5 x 63.5, IP67/67, 10 mm <b>G.43</b> Square 80 x 80, IP67/67, 7 mm	<b>T</b> RS 422 + Sense <b>K</b> push-pull, short circuit proof <b>I</b> push-pull complementary <b>R</b> RS 422 + Alarm	<b>A</b> PVC cable, axial <b>B</b> PVC cable, radial <b>C</b> CONIN <sup>3</sup> , axial, cw <b>D</b> CONIN <sup>3</sup> , radial, cw <b>E</b> TPE cable, axial <b>F</b> TPE cable, radial <b>G</b> CONIN <sup>3</sup> , axial, ccw <b>H</b> CONIN <sup>3</sup> , radial, ccw <b>J</b> BINDER <sup>3</sup> , 6 pole, radial <b>N</b> BINDER <sup>3</sup> , 6 pole, axial <b>O</b> MIL MS <sup>3</sup> , 10 pole, axial <b>K</b> MIL MS <sup>3</sup> , 10 pole, radial

<sup>1</sup> Housing/ bearings

<sup>2</sup> other flange versions can be realized by combination of clamping flange + flange adapter (see Accessories)

e.g. RI58 with synchro flange and 10 mm-shaft: version clamping flange with 10 mm-shaft + synchro flange adapter (1 522 328)

<sup>3</sup> encoder connector with pins

### ACCESSORIES

Clamping eccentric (set of three)

**Ordering code 0 070 655**

Spring washer coupling  
hole 6/6 mm

**Ordering code 3 520 081**

hole 10/10 mm

**Ordering code 3 520 088**

Cable plug connector  
for connector (CONIN),  
cw (type of connection C, D)




**Ordering code 3 539 202**

for connector (CONIN),  
ccw (type of connection G, H)

**Ordering code 3 539 229**

Mounting spanner  
for CONIN connectors

**Ordering code 3 539 343**

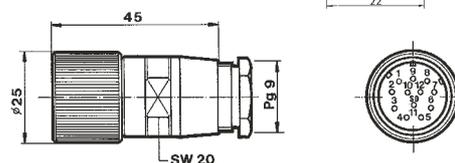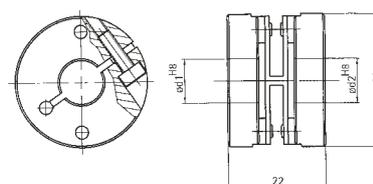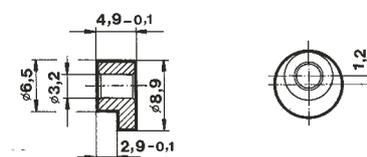

Extension cables  
(TPE)

12 pole plug (socket) on one end


L = 3 m

L = 5 m

L = 10 m

TPE cable (not made up with connectors) **3 280 112** + state required length

For more detailed specifications and other accessories see chapter "Accessories"



clockwise (C,D)

**Ordering code**

**1 522 348**

**1 522 349**

**1 522 350**

counter clockwise (G,H)

**Ordering code**

**1 522 394**

**1 522 395**

**1 522 396**

## Industrial types

## Hollow shaft



- miniature industry encoder for high number of pulses
- short mounting length
- easy mounting procedure
- Application e.g.:
  - Motors
  - Machine tools
  - Packaging Machines
  - Robots
  - Automated SMD equipment

### NUMBER OF PULSES

5 / 10 / 20 / 25 / 50 / 60 / 100 / 200 / 250 / 300 / 360 / 500 / 600 / 720 / 1000 / 1024 / 1250 / 1500 / 2000 / 2048 / 2500 / 3000 / 3600  
 Other number of pulses on request

### TECHNICAL DATA mechanical

Mounting	Clamping shaft (one side open) with clamping ring front
Coupling	Hubshaft with tether
Shaft diameter	4, 6, 8, 10 mm hollow shaft
Angular shaft misalignment max.	±0.15 mm radial, ±0.5 mm axial
Absolute max. speed	max. 10 000 min <sup>-1</sup>
Torque	≤ 1 Ncm
Moment of inertia	approx. 3 gcm <sup>2</sup>
Protection class (EN 60529)	Housing IP 64, bearings IP 64
Operating temperature	-10 ... +70 °C
Storage temperature	-25 ... +85 °C
Vibration resistance	100 m/s <sup>2</sup> (10 ... 2000 Hz)
Shock resistance	1000 m/s <sup>2</sup> (6 ms)
Connection	1.5 m cable <sup>1</sup> axial or radial
Housing	Aluminium
Weight	approx. 80 g

<sup>1</sup> Other cable length on request

### TECHNICAL DATA electrical

General design	as per DIN VDE 0160, protection class III, contamination level 2, overvoltage class II	
Supply voltage (SELV)	with RS 422 (R, T):	DC 5V ± 10 %
	with push-pull (K, I):	DC 10 - 30 V <sup>2</sup>
Max. current w/o load	40 mA (DC 5V), 60 mA (DC 10V), 30 mA (DC 24V)	
Standard output versions <sup>3</sup>	RS 422 (R):	A, B, N, $\overline{A}$ , $\overline{B}$ , $\overline{N}$ , $\overline{Alarm}$
	RS 422 (T):	A, B, N, $\overline{A}$ , $\overline{B}$ , $\overline{N}$ , Sense
	push-pull (K):	A, B, N, $\overline{Alarm}$
	push-pull complementary (I):	A, B, N, $\overline{A}$ , $\overline{B}$ , $\overline{N}$ , $\overline{Alarm}$

<sup>2</sup> Pole protection

<sup>3</sup> Output description and technical data see chapter "Technical basics"


# Incremental Shaft Encoders

## Industrial types

# Type RI 36-H

## Hollow shaft

### DIMENSIONAL DRAWINGS

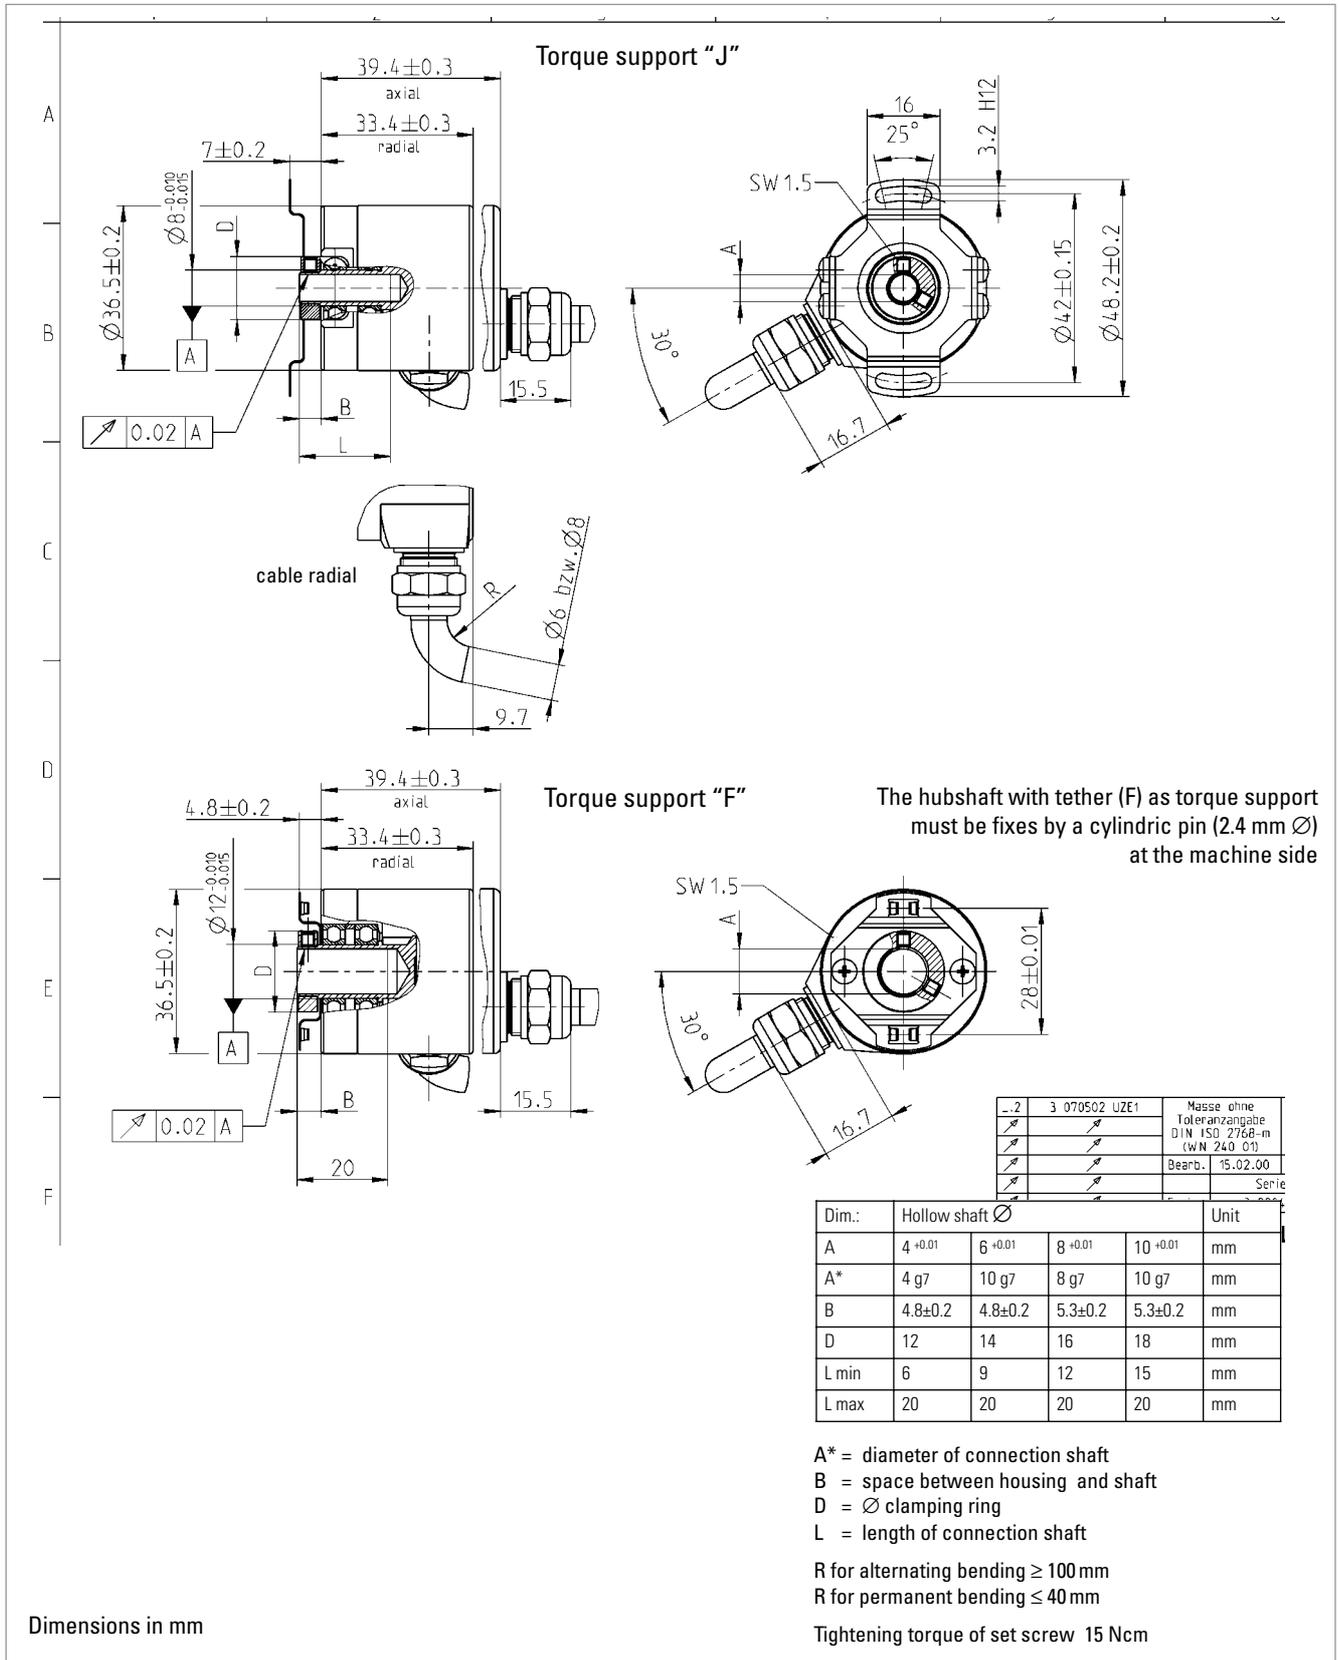

### PIN ASSIGNMENT

Cable PVC (A, B)		Output		
Colour	Litze mm <sup>2</sup>	RS 422 (R, T)	push-pull (K)	push-pull complementary (I)
red	0.5	DC 5 V	DC 10 - 30 V	DC 10 - 30 V
yellow/red	0.14	Sense V <sub>CC</sub>		Sense V <sub>CC</sub>
white	0.14	Channel A	Channel A	Channel A
white/brown	0.14	Channel $\bar{A}$		Channel $\bar{A}$
green	0.14	Channel B	Channel B	Channel B
green/brown	0.14	Channel $\bar{B}$		Channel $\bar{B}$
yellow	0.14	Channel N	Channel N	Channel N
yellow/brown	0.14	Channel $\bar{N}$		Channel $\bar{N}$
black	0.5	GND	GND	GND
yellow/black	0.14	Alarm/Sense GND <sup>1</sup>	Alarm	Alarm
screen <sup>2</sup>		screen <sup>2</sup>	screen <sup>2</sup>	screen <sup>2</sup>

<sup>1</sup> depending on ordering code

<sup>2</sup> connected with encoder housing

### ORDERING INFORMATION

Type	Model	Number of pulses	Supply voltage	Flange, Protection, Shaft	Output	Connection
<input type="checkbox"/>	<input type="checkbox"/>	<input type="text"/>	<input type="checkbox"/>	<input type="text"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>RI36-</b>	<b>H</b> Hollow shaft	<b>5 ... 3 600</b>	<b>A</b> DC 5 V <b>E</b> DC 10 - 30 V (only with push-pull)	<b>F.30</b> Clamping, IP64, 4 mm * <b>F.31</b> Clamping, IP64, 6 mm * <b>F.3C</b> Clamping, IP64, 8 mm * <b>F.32</b> Clamping, IP64, 10 mm * <b>J.30</b> Clamping, IP64, 4 mm ** <b>J.31</b> Clamping, IP64, 6 mm ** <b>J.3C</b> Clamping, IP64, 8 mm ** <b>J.32</b> Clamping, IP64, 10 mm **	<b>T</b> RS 422 + Sense <b>K</b> push-pull short circuit proof <b>R</b> RS 422 + Alarm <b>I</b> push-pull complementary	<b>A</b> Cable axial <b>B</b> Cable radial
<p>* Fixing of hubshaft with tether by cylindrical pin                      ** Fixing of hubshaft with tether by oblong hole</p>						

## Industrial types

## Hollow shaft



- Through shaft
- High accuracy by means of integrated flexible coupling
- Safe shaft mounting
- Application e.g.:
  - textile machines
  - motors
  - drives
  - copiers

## NUMBER OF PULSES

1 / 2 / 3 / 4 / 5 / 10 / 15 / 20 / 25 / 30 / 35 / 40 / 45 / 50 / 60 / 64 / 70 / 72 / 80 / **100** / 125 / 128 / 144 / 150 / 180 / 200 / **250** / 256 / 300 / 314 / 350 / 360 / 375 / 400 / 460 / 480 / **500** / 512 / 600 / 625 / 720 / 900 / **1000** / **1024** / **1250** / 1500 / 1600 / 1800 / 2000 / 2048 / **2500** / 3000 / 3480 / **3600** / 4000 / **4096** / **5000**

Other number of pulses on request

Preferably available versions are printed in bold type.

TECHNICAL DATA  
mechanical

Shaft diameter	10 mm hollow shaft 12 mm hollow shaft
Required dimension of mounting shaft	Ø 10 mm, tolerance g8 (-0.005 ... -0.027 mm) Ø 12 mm, tolerance g8 (-0.006 ... -0.033 mm)
Balance tolerances	
Misalignment axial	± 0.4 mm
Misalignment parallel	0.4 mm
Misalignment angular	1°
Absolute max. speed	max. 3000 min <sup>-1</sup>
Torque	≤ Ncm (IP 64)
Moment of inertia	approx. 65 gcm <sup>2</sup> (10 mm shaft) approx. 95 gcm <sup>2</sup> (12 mm shaft)
Protection class (EN 60529)	Housing IP 64, bearings IP 64
Operating temperature an Welle	-10 ... +70 °C
Storage temperature	-25 ... +85 °C
Vibration resistance (IEC 68-2-6)	10 g = 100 m/s <sup>2</sup> (10 ... 2 kHz)
Shock resistance (IEC 68-2-27)	100 g = 1 000 m/s <sup>2</sup> (6 ms)
Connection	Cable radial, 1.5 m <sup>1</sup>
Housing	Aluminium
Flange	Synchro flange
Weight	approx. 210 g

<sup>1</sup> Other cable length on request

# Incremental Shaft Encoders Type RI 58-H

## Industrial types Hollow shaft

### TECHNICAL DATA electrical


General design	as per DIN VDE 0160, protection class III, contamination level 2, overvoltage class II	
Supply voltage	with RS 422 + Sense (T): DC 5 V ± 10 % with RS 422 + Alarm (R): DC 5 V ± 10 % oder DC 10 - 30 V <sup>1</sup> with push-pull (K, I): DC 10 - 30 V <sup>1</sup>	
Max. current w/o load	40 mA (DC 5 V), 60 mA (DC 10 V), 30 mA (DC 24 V)	
Standard output versions <sup>2</sup>	RS 422 (R):	A, B, N, $\bar{A}$ , $\bar{B}$ , $\bar{N}$ , Alarm
	RS 422 (T):	A, B, N, $\bar{A}$ , $\bar{B}$ , $\bar{N}$ , Sense
	push-pull (K):	A, B, N, Alarm
	push-pull complementary (I):	A, B, N, $\bar{A}$ , $\bar{B}$ , $\bar{N}$ , Alarm

<sup>1</sup> Pole protection with supply voltage DC 10 - 30 V

<sup>2</sup> Output description and technical data see chapter "Technical basics"

### DIMENSIONAL DRAWINGS

#### Synchro flange

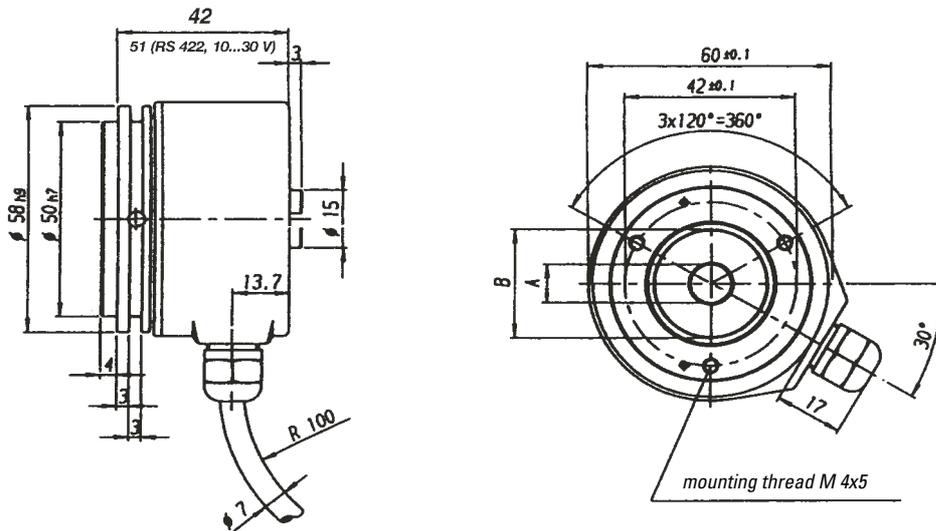

R for alternating bending > 100 mm  
R for permanent bending > 40 mm

∅ Hollow shaft	Required dimension of mounting shaft (g8)
10 mm	- 0.005 ... - 0.027 mm
12 mm	- 0.006 ... - 0.033 mm

Dim.:	∅	
A	10 mm*	12 mm*
B	28 mm	33 mm

\* Tolerance  
H7 = 0 ... + 0.018 mm

# Incremental Shaft Encoders Type RI 58-H

## Industrial types Hollow shaft

### PIN ASSIGNMENT

Connecting cable		Output	
Colour	Lead $\varnothing$	RS 422 T and R	push-pull K and I
red	0.5 mm <sup>2</sup>	DC 5/10 - 30 V	DC 10 - 30 V
red/yellow	0.14 mm <sup>2</sup>	Sense VCC	Sense VCC
white	0.14 mm <sup>2</sup>	Channel A	Channel A
white/brown	0.14 mm <sup>2</sup>	Channel $\bar{A}$	Channel $\bar{A}$ <sup>1</sup>
green	0.14 mm <sup>2</sup>	Channel B	Channel B
green/brown	0.14 mm <sup>2</sup>	Channel $\bar{B}$	Channel $\bar{B}$ <sup>1</sup>
yellow	0.14 mm <sup>2</sup>	Channel N	Channel N
yellow/brown	0.14 mm <sup>2</sup>	Channel $\bar{N}$	Channel $\bar{N}$ <sup>1</sup>
black	0.5 mm <sup>2</sup>	GND	GND
black/yellow	0.14 mm <sup>2</sup>	Alarm /Sense GND <sup>2</sup>	Alarm
screen <sup>3</sup>		screen <sup>3</sup>	screen <sup>3</sup>

<sup>1</sup> only push-pull complementary (I)


<sup>2</sup> depending on ordering code

<sup>3</sup> connected with encoder housing

### ORDERING INFORMATION

Type	Model	Number of pulses	Supply voltage	Flange, Protection, Shaft	Output	Connection
<input type="checkbox"/>	<input type="checkbox"/>	<input type="text"/>	<input type="checkbox"/>	<input type="text"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>RI58-</b>	<b>H</b> Hollow shaft	<b>1 ... 5 000</b>	<b>A</b> DC 5 V <sup>1</sup> <b>E</b> DC 10 - 30 V <sup>2</sup> (only with push-pull)	<b>S.42</b> Synchro, IP64, 10 mm <b>S.47</b> Synchro, IP64, 12 mm	<b>K</b> push-pull <b>T</b> RS 422+ Sense <b>R</b> RS 422+ Alarm <b>I</b> push-pull complementary	<b>B</b> PVC cable radial
<sup>1</sup> with output T, R <sup>2</sup> with output K, I, R						

### ACCESSORIES

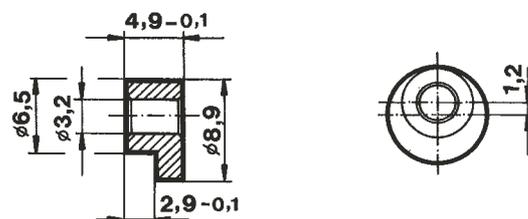

Clamping eccentric (set of three)  
Ordering code 0 070 655

## Industrial types

## Hollow shaft



Blind shaft



Clamping shaft

- Flexible hollow shaft design up to diameter 14 mm
- Short overall length
- Easy installation by means of clamping shaft or blind shaft
- Application e.g.:
  - actuators
  - length measuring machines
  - motors
- Operating temperature up to 100 °C (RI 58 TD)
- Various shaft versions:
  - Mounting code E = Blind shaft (not through)
  - Mounting code F = Clamping shaft (not through)
  - Mounting code D = Clamping shaft (solid shaft)

### NUMBER OF PULSES

RI 58-D 1 / 2 / 3 / 4 / 5 / 10 / 20 / 25 / 30 / 35 / 40 / 45 / 50 / 60 / 64 / 70 / 72 / 80 / **100** / 125 / 128 / 144 / 150 / 180 / 200 / **250** / 256 / 300 / 314 / 350 / 360 / 375 / 400 / 460 / 480 / **500** / 512 / 600 / 625 / 720 / 900 / **1000** / **1024** / **1250** / 1500 / 1600 / 1800 / 2000 / 2048 / **2500** / 3000 / 3480 / **3600** / 4000 / **4096** / **5000**

RI 58 TD (high temperature) as above, but only for the range from 4 ... 2500 pulses  
Other number of pulses on request  
Preferably available versions are printed in bold type.

### TECHNICAL DATA mechanical

Mounting	Synchro flange with clamping shaft or blind shaft
Shaft diameter	Hollow shaft 10 mm, hollow shaft 12 mm, hollow shaft 14 mm (not through)
Required dimensions of mounting shaft	Ø 10 mm, tolerance g8 (-0.005...-0.027 mm) Ø 12/14 mm, tolerance g8 (-0.006...-0.033 mm)
Absolute max. speed	E, F: max. 6 000 min <sup>-1</sup> ; D: max 4 000 min <sup>-1</sup>
Torque	≤ 1 Ncm with non-through shaft (E, F) ≤ 2 Ncm with through shaft (D)
Moment of inertia	F: approx. 35 gcm <sup>2</sup> (clamping non through shaft) E: approx. 20 gcm <sup>2</sup> (end shaft) D: approx. 60 gcm <sup>2</sup> (clamping through shaft)
Protection class (EN 60529)	E, F: housing IP 65, bearings IP 64 D: housing IP 64, bearings IP 64
Operating temperature	-10 ... +70 °C, Option: -25 ...+100°C
Storage temperature	-25 ... +85 °C
Vibration resistance (IEC 68-2-6)	10 g = 100 m/s <sup>2</sup> (10 ... 2 000 Hz)
Shock resistance (IEC 68-2-27)	100 g = 1 000 m/s <sup>2</sup> (6 ms)
Connection	1.5 m cable <sup>1</sup> or connector, radial
Housing	Aluminium
Weight approx.	E, F: 170 g; D: 190 g

<sup>1</sup> Other cable length on request

# Incremental Shaft Encoders

# Type RI 58-D

## Industrial types

## Hollow shaft

### TECHNICAL DATA electrical


General design	as per DIN VDE 0160, protection class III, contamination level 2, overvoltage class II	
Supply voltage (SELV)	with RS 422 + Sense (T):	DC 5 V ± 10 %
	with RS 422 + Alarm (R):	DC 5 V ± 10 % oder DC 10 - 30 V <sup>1</sup>
	with push-pull (K, I):	DC 10 - 30 V <sup>1</sup>
Max. current w/o load	40 mA (5 VDC), 60 mA (10 VDC), 30 mA (24 VDC)	
Standard output versions <sup>2</sup>	RS 422 (R):	A, B, N, $\bar{A}$ , $\bar{B}$ , $\bar{N}$ , Alarm
	RS 422 (T):	A, B, N, $\bar{A}$ , $\bar{B}$ , $\bar{N}$ , Sense
	push-pull (K):	A, B, N, Alarm
	push-pull complementary (I):	A, B, N, $\bar{A}$ , $\bar{B}$ , $\bar{N}$ , Alarm

<sup>1</sup> Pole protection with supply voltage DC 10 - 30 V

<sup>2</sup> Output description and technical data see chapter "Technical basics"


### DIMENSIONAL DRAWINGS

Mounting = F: clamping shaft, not through

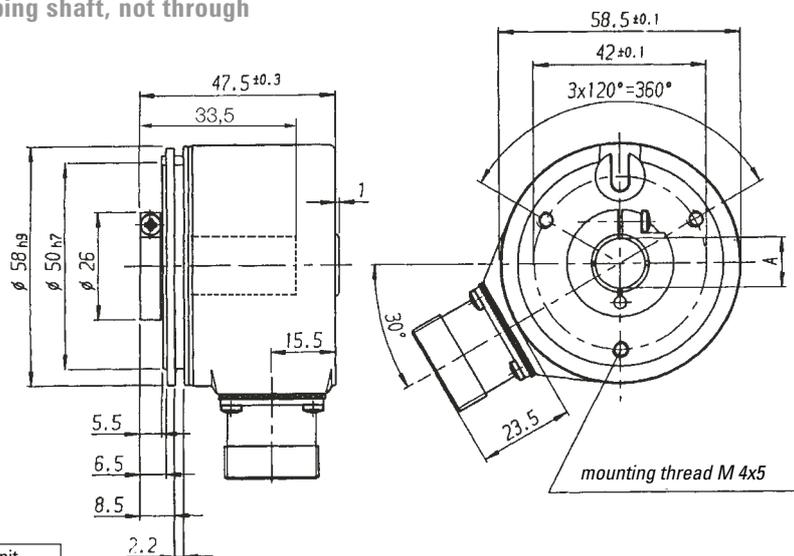

Dim.:	Hollow shaft Ø			Unit
A	10 <sup>H7</sup>	12 <sup>H7</sup>	14 <sup>H7</sup>	mm
A*	10 <sup>g8</sup>	12 <sup>g8</sup>	14 <sup>g8</sup>	mm

A\* = Diameter of connection shaft

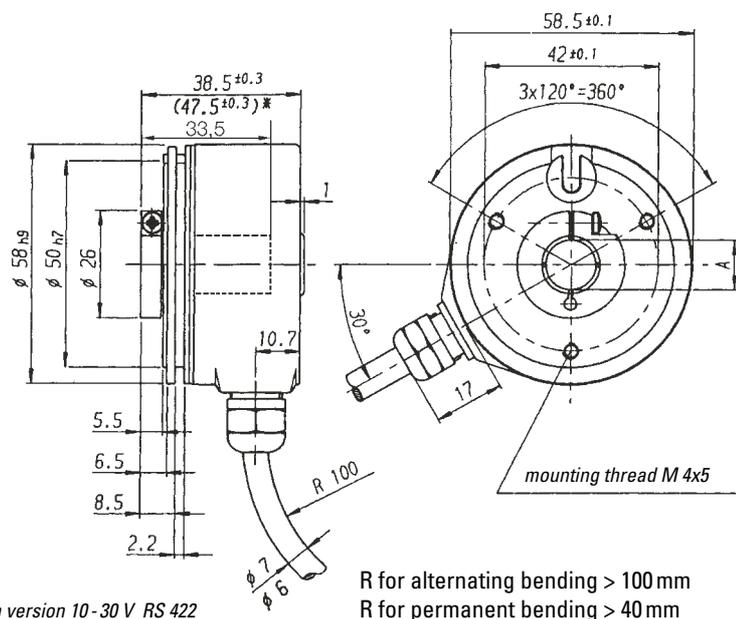


\* with version 10 - 30 V RS 422

# Incremental Shaft Encoders Industrial types

# Type RI 58-D Hollow shaft

## DIMENSIONAL DRAWINGS


Mounting = D: through shaft with clamping ring

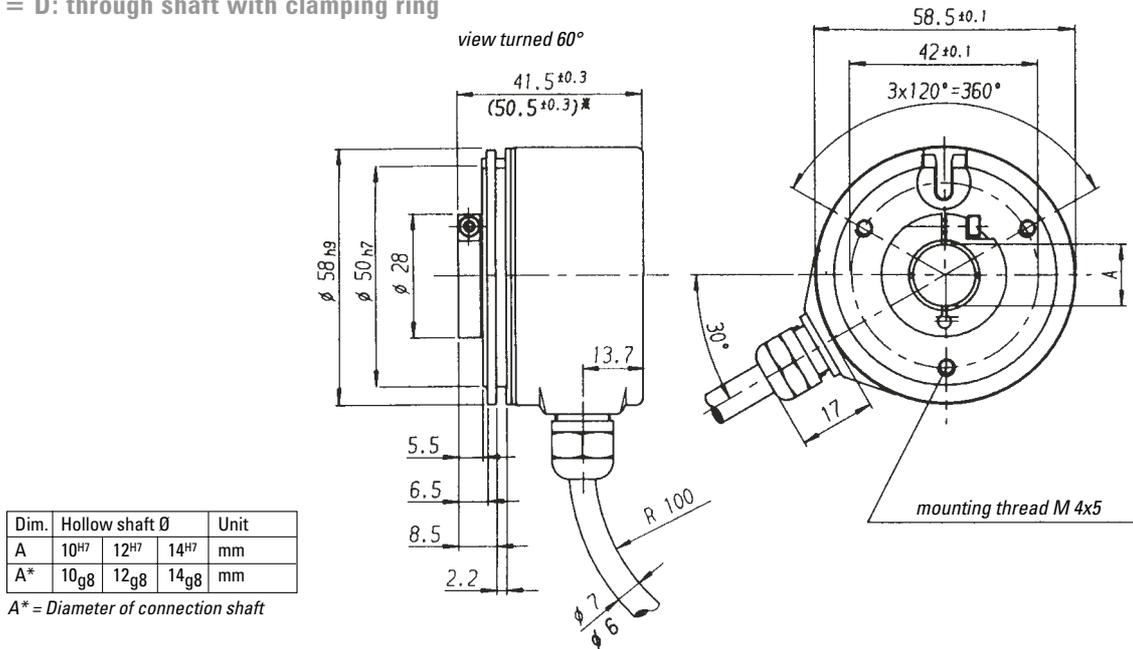

\* with Version 10-30 V RS 422

R for alternating bending > 100 mm  
R for permanent bending > 40 mm

**OPTIONAL:**  
Clamping ring at rear on request

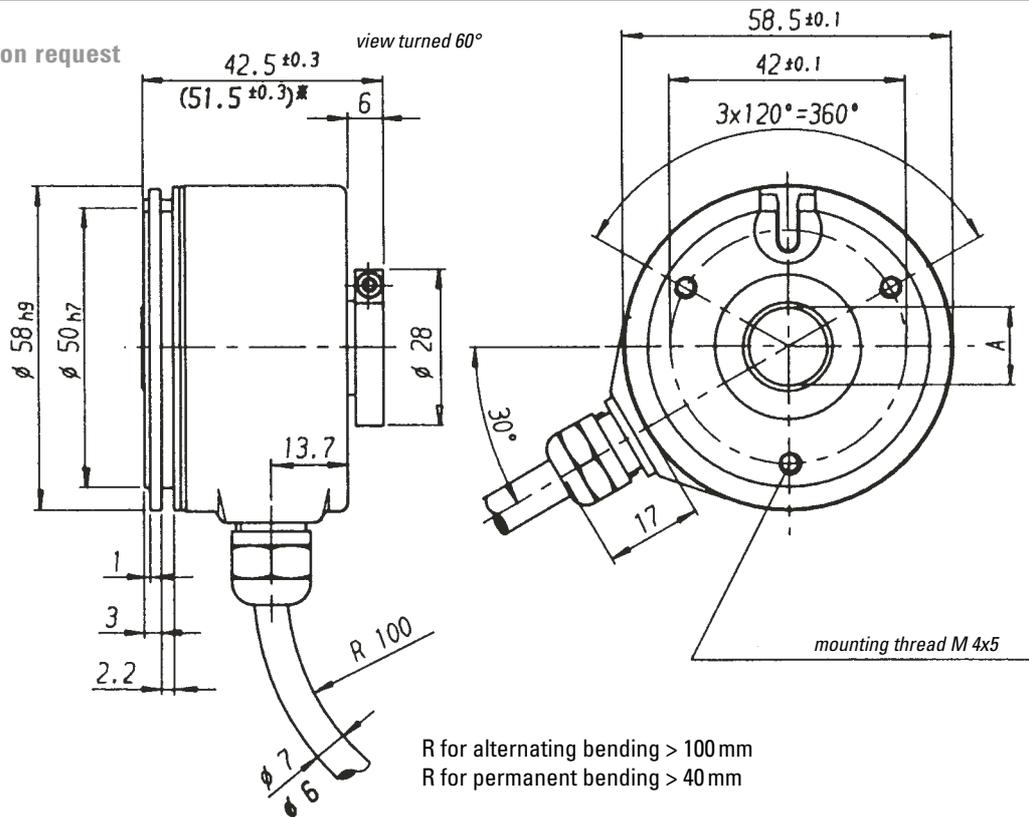


R for alternating bending > 100 mm  
R for permanent bending > 40 mm

# Incremental Shaft Encoders Industrial types

# Type RI 58-D Hollow shaft


## DIMENSIONAL DRAWINGS

Mounting = E, blind shaft (not through)

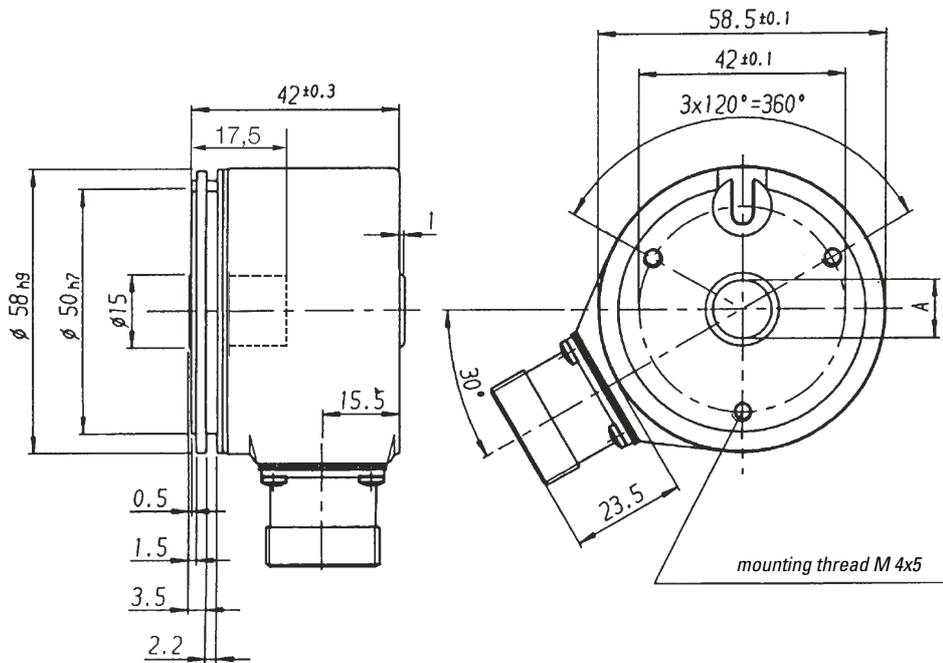

Dim.	Hollow shaft Ø	Unit
A	10 <sup>H7</sup> 12 <sup>H7</sup> 14 <sup>H7</sup>	mm
A*	10 <sub>g8</sub> 12 <sub>g8</sub> 14 <sub>g8</sub>	mm

A\* = Diameter of connection shaft

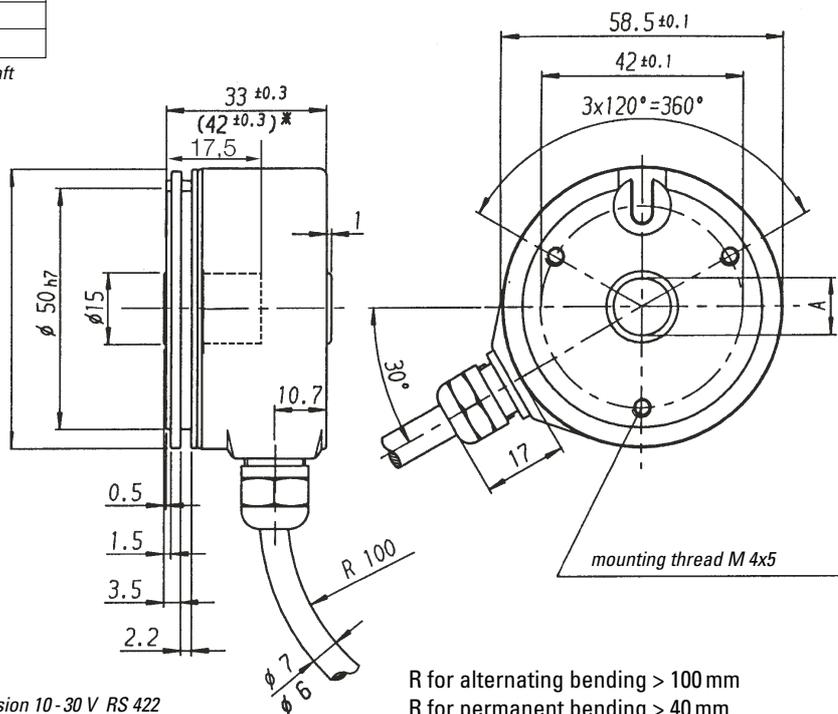

\* with Version 10-30 V RS 422


R for alternating bending > 100 mm  
R for permanent bending > 40 mm

## Industrial types

## Hollow shaft

### MOUNTING NECESSITIES

In order to be able to compensate an axial and radial misalignment of the shaft, the encoder flange must not be fixed rigidly. Fix the flanges by means of a stator coupling (e.g. hubshaft with tether) as torque support (see "Accessories") or by means of a cylindrical pin:

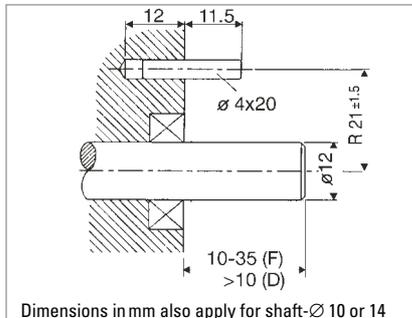

Dimensions in mm also apply for shaft- $\varnothing$  10 or 14

Mounting = D, F (Clamping shaft)


#### Preparation of the machine flange <sup>1</sup>

##### (all mounting versions):

In the machine flange a straight pin must be installed (diameter 4x16 resp. 4x20, DIN 6325).

This pin is required as a torque support.

<sup>1</sup> Or as an option: stator coupling as torque support

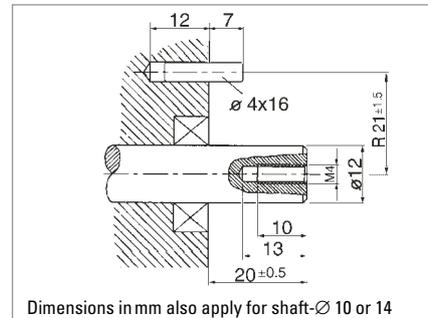

Dimensions in mm also apply for shaft- $\varnothing$  10 or 14

Mounting = E (Blind shaft)

#### Preparation of the drive shaft

##### (only in mounting = E):

The drive shaft must be provided with a threaded bore M 4 x 10:

This bore accepts the fastening screw of the shaft encoder.

### PIN ASSIGNMENT

#### Cable PVC

Cable	Output circuit	RS 422	push-pull (K)	push-pull complementary (I)
PVC	RS 422	RS 422	push-pull (K)	push-pull complementary (I)
Colour	+ Sense (T)	+ Alarm (R)		
white	Channel A	Channel A	Channel A	Channel A
white/brown	Channel $\bar{A}$	Channel $\bar{A}$		Channel $\bar{A}$
green	Channel B	Channel B	Channel B	Channel B
green/brown	Channel $\bar{B}$	Channel $\bar{B}$		Channel $\bar{B}$
yellow	Channel N	Channel N	Channel N	Channel N
yellow/brown	Channel $\bar{N}$	Channel $\bar{N}$		Channel $\bar{N}$
yellow/black	Sense GND	Alarm	Alarm	Alarm
yellow/red	Sense V <sub>CC</sub>	Sense V <sub>CC</sub>		Sense V <sub>CC</sub>
red	DC 5 V	DC 5/10 - 30 V	DC 10 - 30 V	DC 10 - 30 V
black	GND	GND	GND	GND
Cable screen <sup>1</sup>				

<sup>1</sup> connected with encoder housing

### PIN ASSIGNMENT

#### Cable TPE

Cable	Output circuit	RS 422	push-pull (K)	push-pull complementary (I)
TPE	RS 422	RS 422	push-pull (K)	push-pull complementary (I)
Colour	+ Sense (T)	+ Alarm (R)		
brown	Channel A	Channel A	Channel A	Channel A
green	Channel $\bar{A}$	Channel $\bar{A}$		Channel $\bar{A}$
grey	Channel B	Channel B	Channel B	Channel B
pink	Channel $\bar{B}$	Channel $\bar{B}$		Channel $\bar{B}$
red	Channel N	Channel N	Channel N	Channel N
black	Channel $\bar{N}$	Channel $\bar{N}$		Channel $\bar{N}$
violet (white) <sup>2</sup>	Sense GND	Alarm	Alarm	Alarm
blue	Sense V <sub>CC</sub>	Sense V <sub>CC</sub>		Sense V <sub>CC</sub>
brown/green	DC 5 V	DC 5/10 - 30 V	DC 10 - 30 V	DC 10 - 30 V
white/green	GND	GND	GND	GND
Cable screen <sup>1</sup>	Cable screen <sup>1</sup>	Cable screen <sup>1</sup>	Cable screen <sup>1</sup>	Cable screen <sup>1</sup>

# Incremental Shaft Encoders Type RI 58-D

## Industrial types Hollow shaft


### PIN ASSIGNMENT Connector (CONIN)

Pin	RS 422 + Sense (T)	RS 422 + Alarm (R)	push-pull (K)	push-pull complementary (I)
1	Channel $\bar{B}$	Channel $\bar{B}$	N.C.	Channel $\bar{B}$
2	Sense $V_{CC}$	Sense $V_{CC}$	N.C.	Sense $V_{CC}$
3	Channel N	Channel N	Channel N	Channel N
4	Channel $\bar{N}$	Channel $\bar{N}$	N.C.	Channel $\bar{N}$
5	Channel A	Channel A	Channel A	Channel A
6	Channel $\bar{A}$	Channel $\bar{A}$	N.C.	Channel $\bar{A}$
7	N.C.	Alarm	Alarm	Alarm
8	Channel B	Channel B	Channel B	Channel B
9	N.C. <sup>1</sup>	N.C. <sup>1</sup>	N.C. <sup>1</sup>	N.C. <sup>1</sup>
10	GND	GND	GND	GND
11	Sense GND	N.C.	N.C.	N.C.
12	DC 5 V	DC 5/10 - 30 V	DC 10 - 30 V	DC 10 - 30 V

<sup>1</sup> screen for cable with CONIN connector

### ACCESSORIES

Hubshaft with tether as stator coupling: ordering code 1531 162

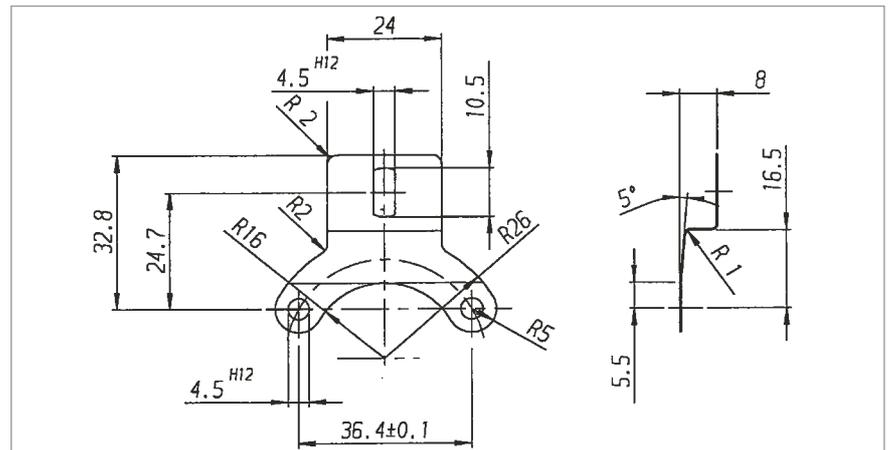

### ORDERING INFORMATION

Type	Model	Number of pulses	Supply voltage	Flange, Protection, Shaft	Output	Connection
<input type="checkbox"/>	<input type="checkbox"/>	<input type="text"/>	<input type="checkbox"/>	<input type="text"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>RI58-</b>	<b>D</b> Hollow shaft <b>TD</b> Hollow shaft 100 °C	<b>1 ... 5 000</b>	<b>A</b> DC 5 V <sup>4</sup> <b>E</b> DC 10 - 30 V <sup>5</sup> (only with push-pull)	<b>E.42</b> Blind shaft <sup>1</sup> , IP64/64, 10 mm <b>E.47</b> Blind shaft <sup>1</sup> , IP64/64, 12 mm <b>E.49</b> Blind shaft <sup>1</sup> , IP64/64, 14 mm <b>F.42</b> Blind shaft <sup>1</sup> , IP64/64, 10 mm <b>F.47</b> Blind shaft <sup>1</sup> , IP64/64, 12 mm <b>F.49</b> Blind shaft <sup>1</sup> , IP64/64, 14 mm <b>D.32</b> Clamping shaft front <sup>2</sup> , IP64/64, 10 mm <b>D.37</b> Clamping shaft front <sup>2</sup> , IP64/64, 12 mm	<b>K</b> push-pull <b>T</b> RS 422 + Sense <b>R</b> RS 422 + Alarm <b>I</b> push-pull complementary	<b>B</b> PVC cable radial <b>F</b> TPE cable radial <b>D</b> CONIN radial, cw <sup>3</sup> <b>H</b> CONIN radial, ccw <sup>3</sup>

<sup>1</sup> Mounting E, F: no through shaft (blind hole)

<sup>2</sup> through shaft, only connection cable

<sup>3</sup> only with mounting E or F (no through shaft)

<sup>4</sup> with output T, R

<sup>5</sup> with output K, I, R

## Industrial types

## Hollow shaft



- Through shaft with up to diameter 42 mm
- Short overall length with an outside diameter of only 76 mm
- Easy installation by means of clamping ring
- Operating temperature up to 100 °C
- Application e.g.:
  - motors
  - printing machines
  - lifts

### NUMBER OF PULSES

50 / 100 / 128 / 250 / 256 / 300 / 314 / 360 / 500 / 600 / 720 / 900 / 1000 / 1024 / 1250 / 1500 / 2048 / 2500 / 3072 / 4096 / 5000 / 8192 / 9000 / 10000  
 Other number of pulses on request

### TECHNICAL DATA mechanical

Shaft fixation	Clamping ring, front or rear
Coupling	stator coupling (hubshaft with tether)
Shaft diameter	15...42 mm (Available: 15, 16, 18, 20, 24, 25, 27, 28, 30, 32, 38, 40, 42 mm as well as 5/8", 1 5/8", 3/4")
Minimum length of mounting shaft	
Front clamping ring	32 mm with Ø 15...30, 35 mm with Ø >30...42
Rear clamping ring	corresponding to total length of encoder
Max. parallel shaft misalignment	
with stator coupling A (flexible)	±2.0 mm axial, ±0.15 mm radial
with 1x stator coupling N (torsionally rigid)	±0.5 mm axial, ±0.3 mm radial
with 2x stator coupling N (torsionally rigid)	±0.3 mm axial, ±0.2 mm radial
Absolute max. speed	at 70 °C and IP64: 3600 min <sup>-1</sup> für Ø 15...25 at 70 °C and IP64: 1800 min <sup>-1</sup> für Ø >25...42 at 70 °C and IP40: 6000 min <sup>-1</sup> für Ø 15...42 at 100 °C always: 1800 min <sup>-1</sup> für Ø 15...42
Torque	3...10 Ncm (depending on version)
Moment of inertia	140...420 gcm <sup>2</sup> (depending on version)
Protection class (EN 60529)	Housing IP 50, bearings IP 40 Option: Housing IP 65, bearings IP 64
Operating temperature	-25...+100 °C
Storage temperature	-25...+100 °C
Vibration resistance (IEC 68-2-6)	10 g = 100 m/s <sup>2</sup> (10...2000 Hz)
Shock resistance (IEC 68-2-27)	100 g = 1000 m/s <sup>2</sup> (6 ms)
Connection	1.5 m cable <sup>1</sup> radial
Housing	Aluminium
Weight	320 - 580 g (depending on version)

<sup>1</sup> Other cable length on request

# Incremental Shaft Encoders Type RI 76 TD

## Industrial types Hollow shaft



### TECHNICAL DATA electrical

General design	as per DIN EN 61010-Part 1, protection class III, Contamination level 2, over voltage level II	
Supply voltage (SELV)	with RS 422 +Sense (T): DC 5V ± 10 % with RS 422 +Alarm (R): DC 5V ± 10 % oder DC 10 - 30V <sup>1</sup> with push-pull (K, I): DC 10 - 30V <sup>1</sup>	
Max. current w/o load	max. 60 mA (DC 5V), 60 mA (DC 10V), 35 mA (DC 24V)	
Standard output versions <sup>2</sup>	RS 422 (R):	A, B, N, $\bar{A}$ , $\bar{B}$ , $\bar{N}$ , Alarm
	RS 422 (T):	A, B, N, $\bar{A}$ , $\bar{B}$ , $\bar{N}$ , Sense
	push-pull (K):	A, B, N, Alarm
	push-pull complementary (I):	A, B, N, $\bar{A}$ , $\bar{B}$ , $\bar{N}$ , Alarm

<sup>1</sup> Pole protection with supply voltage DC10 - 30 VDC

<sup>2</sup> Output description and technical data see chapter "Technical basics"

### DIMENSIONAL DRAWINGS

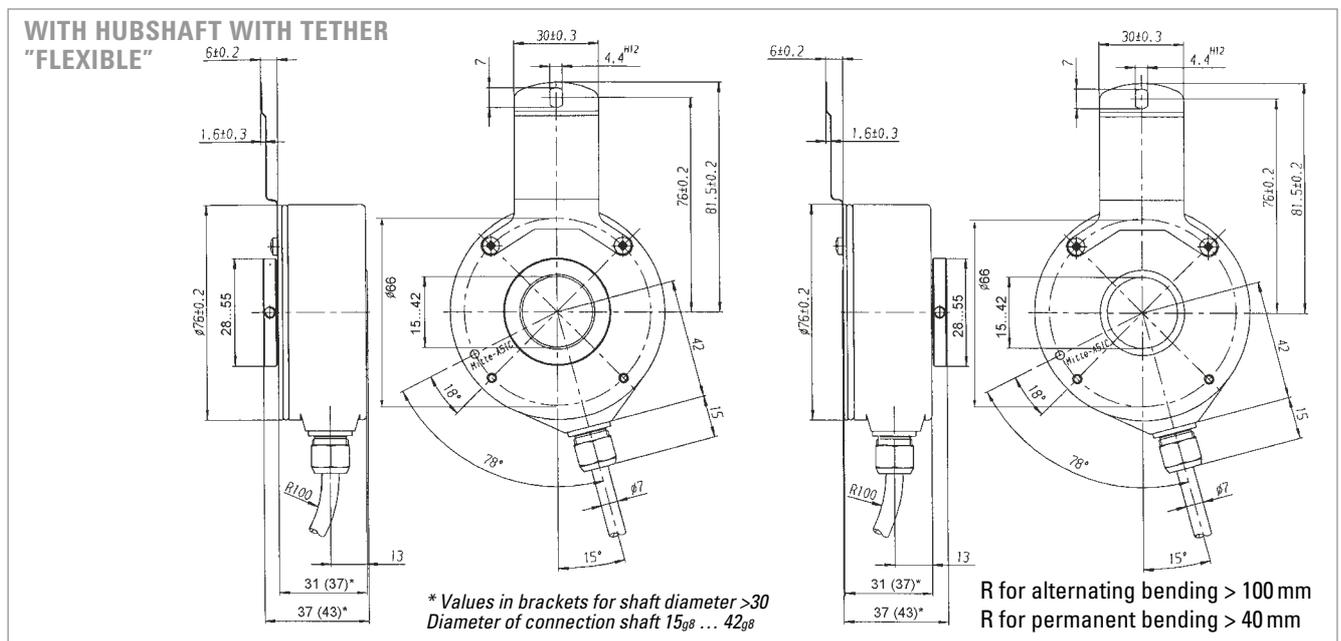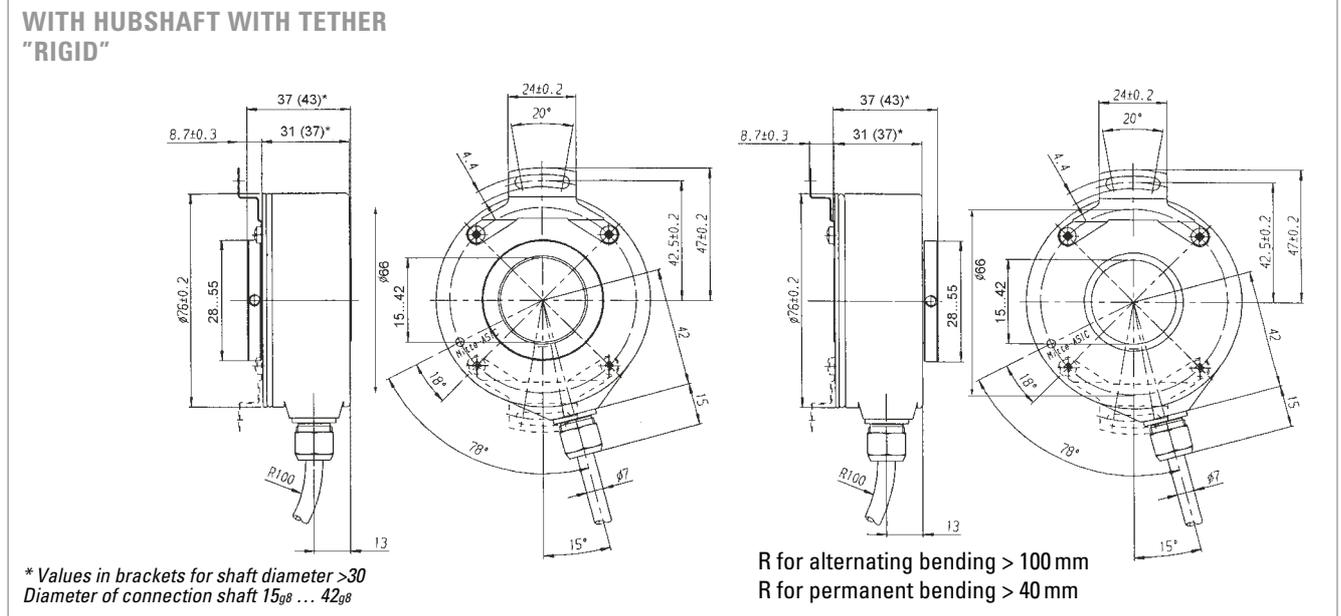

## Industrial types

## Hollow shaft

### SHAFT CONNECTION

Shaft fixing is done through a clamping ring either on the flange or cap side. As a rule, flange side clamping is better for smaller motors as the available shaft stub is correspondingly shorter.

On the other hand, cap side clamping is easier when there is sufficient shaft length available.

### MOUNTING NECESSITIES

In order to compensate for axial and radial shaft eccentricity as well as any angle offset, the encoder flange must not be rigidly mounted. Please mount the flange with a flexible stator coupling (e.g. hubshaft with tether) as torque support.

There are two flexible mounting plates:

- A flexible hubshaft with tether (A) for higher levels of play and lower requirements for accuracy.
- A rigid hubshaft with tether (N) for reduced play and rigid connection with reduced swing angle. This is suitable in the case of higher accuracy and dynamics requirements.

### PIN ASSIGNMENT

#### Cable TPE

Colour (TPE)	Output circuit			
	RS 422 + Sense (T)	RS 422 + Alarm (R)	push-pull (K)	push-pull complementary (I)
brown	Channel A	Channel A	Channel A	Channel A
green	Channel $\bar{A}$	Channel $\bar{A}$		Channel $\bar{A}$
grey	Channel B	Channel B	Channel B	Channel B
pink	Channel $\bar{B}$	Channel $\bar{B}$		Channel $\bar{B}$
red	Channel N	Channel N	Channel N	Channel N
black	Channel $\bar{N}$	Channel $\bar{N}$		Channel $\bar{N}$
violet (white) <sup>2</sup>	Sense GND	$\bar{\text{Alarm}}$	$\bar{\text{Alarm}}$	$\bar{\text{Alarm}}$
blue	Sense V <sub>CC</sub>	Sense V <sub>CC</sub>		Sense V <sub>CC</sub>
brown/green	DC 5 V	DC 5/10 .- 30 V	DC 10 - 30 V	DC 10 - 30 V
white/green	GND	GND	GND	GND
Cable screen <sup>1</sup>	Cable screen <sup>1</sup>	Cable screen <sup>1</sup>	Cable screen <sup>1</sup>	Cable screen <sup>1</sup>

<sup>1</sup> connected with encoder housing

<sup>2</sup> white for version Sense (T)

### ACCESSORIES

Hubshaft with tether flexible	ordering code 1 533 079
Hubshaft with tether rigid	ordering code 1 533 078

# Incremental Shaft Encoders Type RI 76 TD

## Industrial types Hollow shaft

### ORDERING INFORMATION

Type	Model	Number of pulses	Supply voltage	Flange	Protection	Stator coupling	Shaft	Output	Connection
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>RI76</b>	<b>TD</b> High temperature, direct hollow shaft	<b>1...10 000</b>	<b>A</b> DC 5 V <sup>1</sup> <b>E</b> DC 10-30 V <sup>2</sup>	Clamping shaft with <b>D</b> Front clamping ring <b>H</b> Rear clamping ring	<b>1</b> IP 40 <b>4</b> IP 64	<b>O</b> without <b>A</b> flexible <b>N</b> rigid	<b>15...42</b> metric in mm <b>50...99</b> coded by inches <b>50</b> = 5/8" <b>51</b> = 1 5/8" <b>52</b> = 3/4"	<b>R</b> RS 422 + Alarm <b>T</b> RS 422 + Sense <b>K</b> push-pull <b>I</b> push-pull complementary	<b>F</b> TPE cable radial

<sup>1</sup> only with output R, T,

<sup>2</sup> only with output R, K, I

<sup>3</sup> Available with front clamping ring and IP 40: 15, **20, 24**, 25, 27, 28, 30, 38, 40, 42, 50 (5/8"), 51 (1 5/8")

Available with front clamping ring and IP 64: **15, 16, 18, 20, 24, 25, 27, 28, 30, 32, 38, 40, 42, 50** (5/8"), 51 (1 5/8"), 52 (3/4")

Available with rear clamping ring and IP 40: 25, 28, 30, 32, 38, 40, 42

Available with rear clamping ring and IP 64: 20, **25, 30, 32, 38, 40, 42**

Preferably available versions are printed in bold type.

Others: please request delivery time

PRELIMINARY



## GENERAL INFORMATION

## NUMBER OF PULSES

## TECHNICAL DATA mechanical

## TECHNICAL DATA electrical

# Incremental Shaft Encoders

# Type RI 80-E

## Industrial types

## Hollow shaft

- Incremental Output
- 30...45 mm hollow shaft
- Rugged mechanical design
- Unbreakable disc
- Integrated diagnostic system
- Wide voltage range 5 ... 30 V

The central element of the RI80-E is the latest Hengstler OptoAsic technology, which offers the following key benefits:

- Highest EMC immunity
- Outstanding reliability by reduced number of components and integrated diagnostics system
- Aging compensation by integrated LED light regulation
- Integrated monitoring of pollution, disk damage, LED lifetime, temperature

A robust and generously dimensioned mechanical design ensures long maintenance free operation.

The RI80-E is ideally suited for applications like:

- Geared Elevators
- Asynchronous Motors
- Industrial Machinery

1024 / 2048 / 4096

Other number of pulses on request

Shaft fixation	Keyway, set screw
Coupling	Spring tether (single, double)
Protection	IP 50, IP 64
Max. Speed	3 600 min <sup>-1</sup> (IP 50) 1 500 min <sup>-1</sup> (IP 64)
Moment of inertia	240 kgmm <sup>2</sup>
Max. parallel shaft misalignment	axial: ± 0.5 mm radial: ± 0.05 mm
Operating temperature	-20 ...+70°C
Storage temperature	-40 ...+70°C
Material housing	Glass fiber-reinforced plastic/ aluminum
Weight ST/ MT	1000 g



General design	As per DIN EN 61010, protection class III, Contamination level 2 , over voltage class II
Supply voltage	DC 5V±10% or DC 10-30V <sup>1</sup>
Max. current w/o load	max 60mA (DC 5V), 60mA (DC 10V), 35mA (DC 24V)
Standard output versions	With RS 422 +Alarm (R): A, B, N, $\bar{A}$ , $\bar{B}$ , $\bar{N}$ , $\bar{Alarm}$ With RS 422 +Sense (T): A, B, N, $\bar{A}$ , $\bar{B}$ , $\bar{N}$ , $\bar{Sense}$ With push-pull (K): A, B, N, $\bar{Alarm}$ With push-pull (I): A, B, N, $\bar{A}$ , $\bar{B}$ , $\bar{N}$ , $\bar{Alarm}$
Connection	Sub-D 15-pole, cable radial

<sup>1</sup> Pole protection with supply voltage DC 5 ...30 V

# Incremental Shaft Encoders Industrial types

# Type RI80-E Hollow shaft

## DIMENSIONAL DRAWINGS

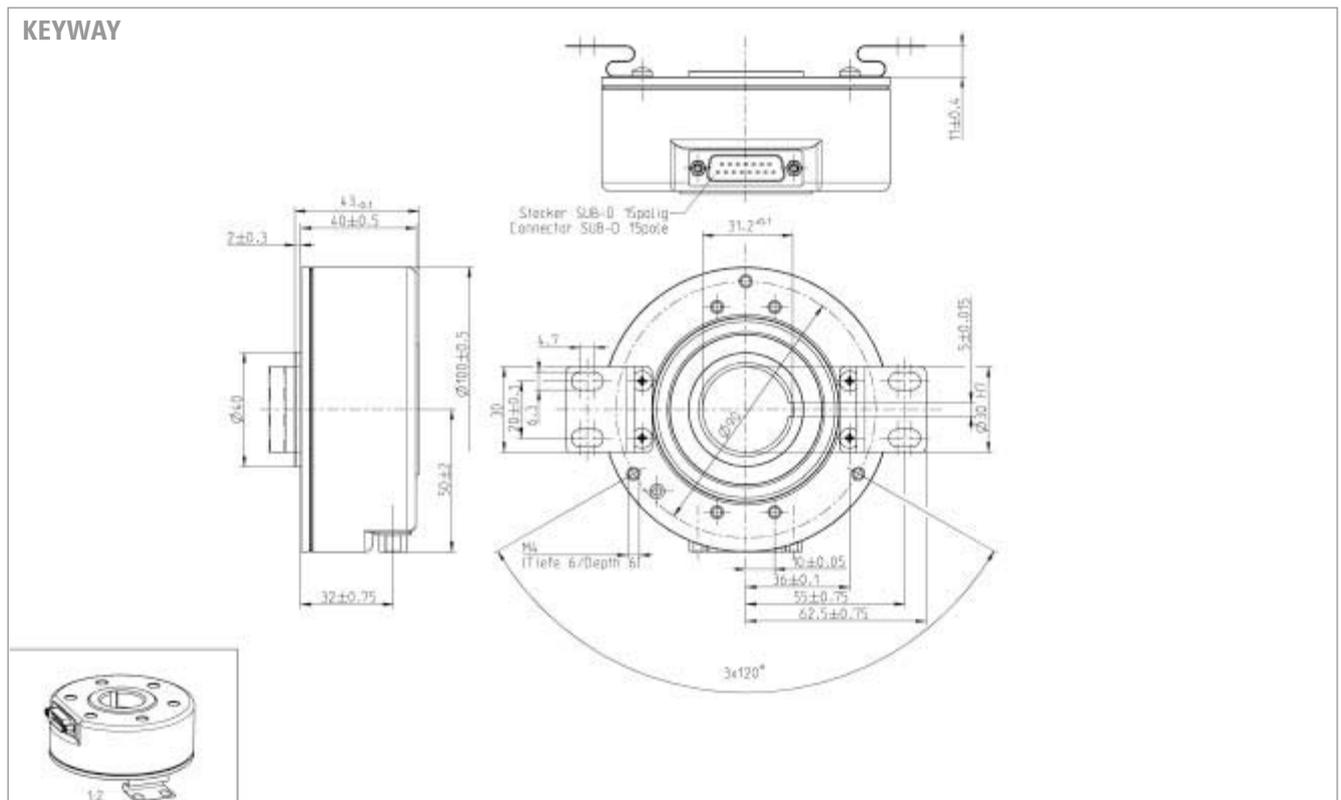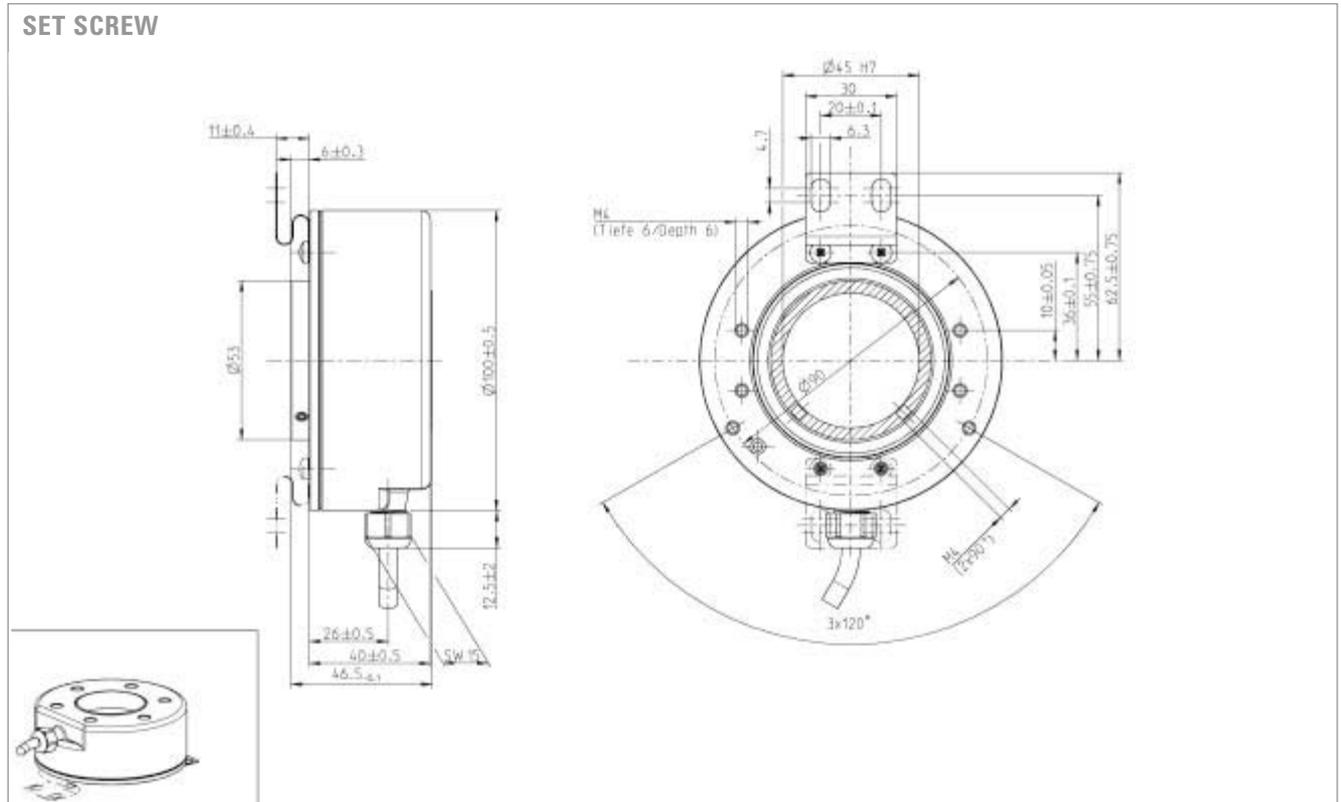

## Industrial types

## Hollow shaft

### PIN ASSIGNMENT

#### Cable


Color	RS 422 + Alarm (R)	Push-pull (K)	Push-pull Complement. (I)	RS 422 + Sense (T)
brown	Channel A	Channel A	Channel A	Channel A
green	Channel $\bar{A}$		Channel $\bar{A}$	Channel $\bar{A}$
gray	Channel B	Channel B	Channel B	Channel B
pink	Channel $\bar{B}$		Channel $\bar{B}$	Channel $\bar{B}$
red	Channel N	Channel N	Channel N	Channel N
black	Channel $\bar{N}$		Channel $\bar{N}$	Channel $\bar{N}$
violet (white <sup>1</sup> )	$\bar{Alarm}$	$\bar{Alarm}$	$\bar{Alarm}$	Sense GND
blue	Sense $V_{CC}$		Sense $V_{CC}$	Sense $V_{CC}$
brown/green	DC 5 - 30 V	DC 5 - 30 V	DC 5 - 30 V	DC 5 - 30V
white/green	GND	GND	GND	GND
screen	screen	screen	screen	screen

<sup>1</sup> white cable only cable for RS 422 + Sense (T)

### PIN ASSIGNMENT

#### Sub-D 15 pin

Pin	Signal
1	$\bar{B}$
2	B
3	$\bar{A}$
4	A
5	GND
6	+Ub
7	n.c.
8	screen
9	$\bar{N}$
10	N
11	n.c.
12	n.c.
13	n.c.
14	n.c.
15	n.c.

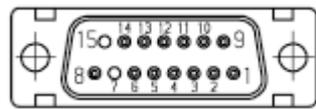

### ORDERING INFORMATION

Type	Model	Number of pulses	Supply voltage	Spring tether	Protection	Mounting/ shaft	Output	Connection
<b>RI80-</b>	<b>E</b>	<b>1024</b> <b>2048</b> <b>4096</b>	<b>A</b> DC 5 V <b>E</b> DC 5 - 30 V	<b>A</b> single <b>B</b> double <b>O</b> without	<b>1</b> IP 50 <b>4</b> IP 64	<b>K30</b> Keyway/ 30mm <b>G30</b> Set screw/ 30mm <b>G45</b> Set screw/ 45mm	<b>R</b> RS422+Alarm <b>T</b> RS422+Sense <b>K</b> Push-pull <sup>1</sup> <b>I</b> Push-pull complementary <sup>1</sup>	<b>B</b> Cable radial 1.5 m <b>B-F0</b> Cable radial 5 m <b>B-K0</b> Cable radial 10 m <b>4</b> SUB-D 15

<sup>3</sup> Driver type DL, see < [www.ichaus.de](http://www.ichaus.de) >

# Incremental Shaft Encoders Type PC 9/PC 9S

## Economy Types

## Panelcoders™



- Provides digital control inputs from operators's panel
- Bidirectional squarewave signal outputs
- Up to 512 increments
- Continuous and reversible rotation
- Non-contacting
- Operating temperature -40 ... 100 °C

### NUMBER OF PULSES

100 ... 512

### TECHNICAL DATA mechanical


Shaft load	1/8" Shaft: 4 N axial, 27 N radial 1/4" Shaft: 4 N axial, 4 N radial
Moment of inertia	0.20 gcm <sup>2</sup>
Operating temperature	-40 ... +100 °C
Storage temperature	-50 ... +125 °C
Relative humidity	90 %, non-condensing
Connection	PC9: 10 pole header PC9S: 5 pole header
Recommended mating connectors	PC9: Thomas & Betts, part number 622-1030 (on request) PC9S: AMP, part number 103675-4 (on request)

### TECHNICAL DATA electrical


Code	Incremental, optical
Phasing	90° ±18° electrical
Symmetry	180° ±18° electrical
Index pulse width	90° ±36° electrical
Supply voltage	DC 5 V ±10 %
Supply current	10 mA, typical
Standby current	max. 50 µA (PC9 only)
Output signals	min. 2.5 V high (V <sub>OH</sub> ) max. 0.5 V low (V <sub>OL</sub> )
Output current	PC9: 3 mA sink/source (25 °C), 2 mA (100 °C) PC9S: 6 mA sink/source (25 °C), 4 mA (100 °C)
Max. output frequency	200 kHz

# Incremental Shaft Encoders Type PC 9/PC 9S Economy Types Panelcoders™

## DIMENSIONAL DRAWINGS

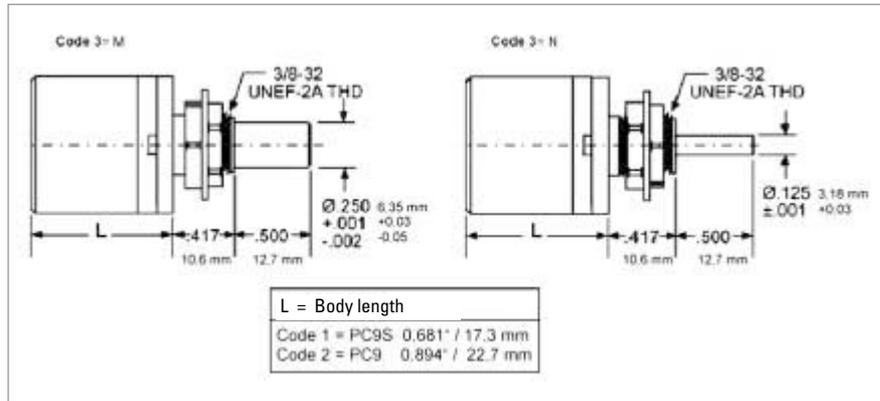

## OUTPUT WAVEFORMS & CONNECTIONS PC9

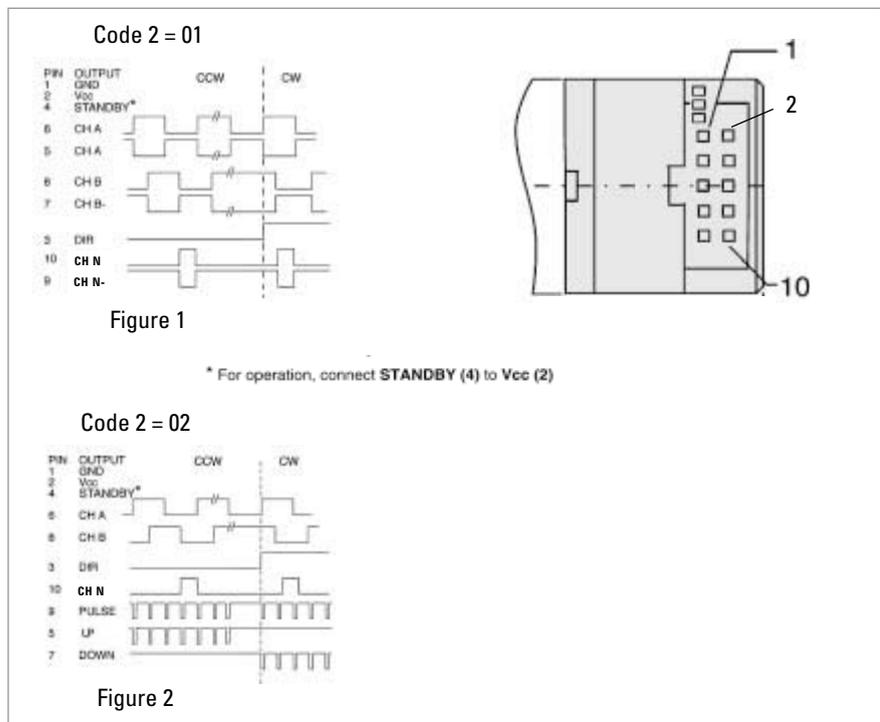

## ACCESSORIES PC9

	ordering code
10 pole header, 30 cm ribbon cable with connector	CA 0 040 012

## ORDERING INFORMATION PC9


Type	Number of pulses	Code 2: Output	Mounting
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
PC9	0100	01 see figure 1	M 1/4" Shaft, sleeve bearing
	0144	02 see figure 2	N 1/8" Shaft, ball bearings
	0200		
	0256		
	0300		
	0360		
	0500		
0512			

# Incremental Shaft Encoders Type PC 9/PC 9S

## Economy Types

## Panelcoders™

### OUTPUT WAVEFORMS & CONNECTIONS PC9S

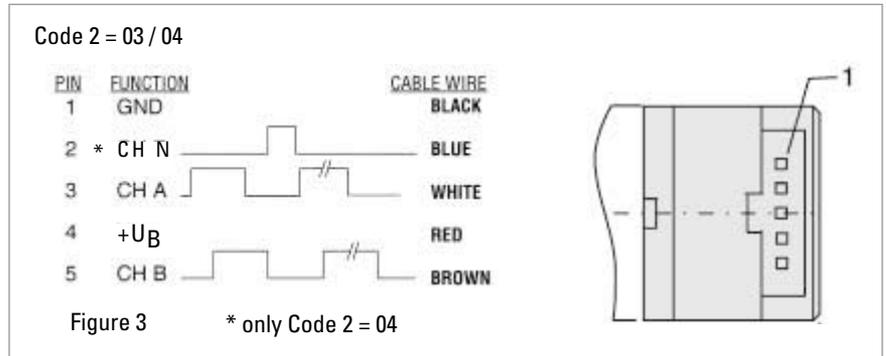

### ACCESSORIES PC9S

5 pole header, 30 cm cable with connector	ordering code CA 0 050 012
---	-------------------------------

### ORDERING INFORMATION PC9S

Type	Number of pulses	Code 2: Output	Mounting
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>PC9S</b>	<b>0 100</b> <b>0 144</b> <b>0 200</b> <b>0 256</b> <b>0300</b> <b>0 360</b> <b>0 500</b> <b>0 512</b>	<b>03</b> see figure 3 (no index) <b>04</b> see figure 3	<b>M</b> 1/4" Shaft, sleeve bearing <b>N</b> 1/8" Shaft, ball bearings

## Economy Types



- Replacement for type RIS and RI 31
- The economical encoder for small appliances
- High efficiency by means of ball bearing
- Small torque
- Application e.g.
  - laboratory equipment
  - training equipment
  - crimping machines
  - tampon printing machines
  - miniature grinding machines

## NUMBER OF PULSES

5 / 10 / 20 / 25 / 30 / 50 / 60 / 100 / 120 / 128 / 200 / 250 / 256 / 288 / 300 / 360 / 400 / 500 / 512 / 600 / 720 / 900 / 1000 / 1024 / 1250 / 1500  
 Other number of pulses on request

TECHNICAL DATA  
mechanical

Shaft diameter	5 mm/ 6 mm
Absolute max. shaft load	radial 10 N, axial 5 N
Absolute max. speed	6 000 min <sup>-1</sup>
Torque	≤ 0.05 Ncm
Protection class (EN 60529)	Housing IP 50, bearings IP 40
Operating temperature	-10 ... +60 °C
Storage temperature	-25 ... +85 °C
Vibration resistance (IEC 68-2-6)	100 m/s <sup>2</sup> (10 ... 2000 Hz)
Shock resistance (IEC 68-2-27)	1000 m/s <sup>2</sup> (6 ms)
Connection	1.5 m cable axial/radial <sup>1</sup>
Material	Housing: plastic; Flange: Aluminium
Flange	Pilot flange
Weight approx.	50 g

<sup>1</sup> Other cable length on request

TECHNICAL DATA  
electrical

General design	as per DIN VDE 0160, protection class III, contamination level 2, over voltage class II	
Supply voltage (SELV)	with push-pull (D):	DC 5V ±10 %
	with push-pull (K):	DC 5V <sup>1</sup> ±10 % oder DC 10 - 30V <sup>2</sup>
Max. current w/o load	40 mA (DC 5V), 60 mA (DC 10V), 30 mA (DC 24V)	
Standard output versions <sup>3</sup>	push-pull (K, D):	A, B, N, Alarm


<sup>2</sup> Pole protection

<sup>3</sup> Output description and technical data see chapter "Technical basics"

# Incremental Shaft Encoders Type RI 32

## Economy Types

### DIMENSIONAL DRAWINGS

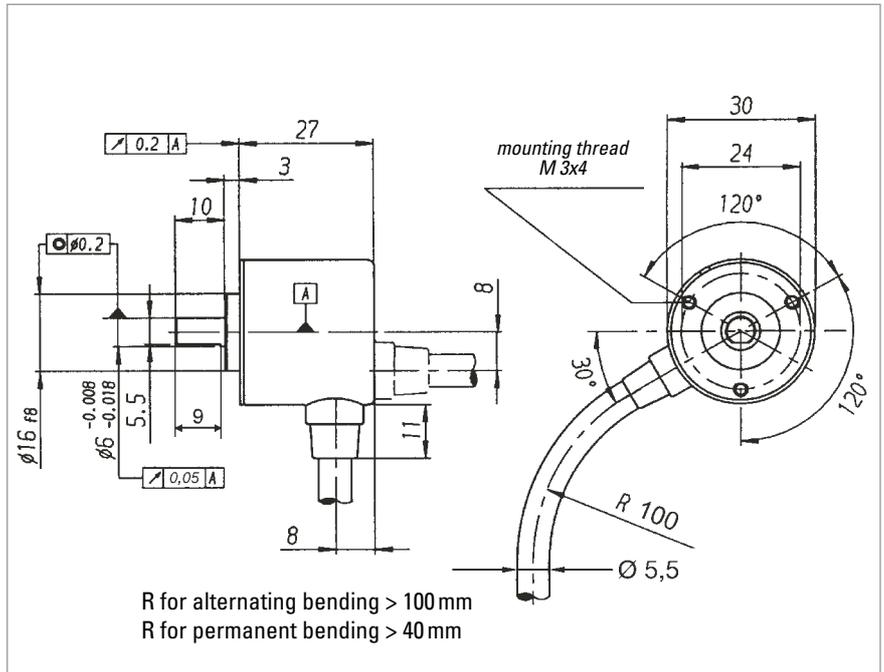

### PIN ASSIGNMENT

Description (push-pull)	Lead Ø mm <sup>2</sup>	Colour
DC 5 V/ 10 - 30 V	0.5	red
Channel A	0.14	white
Channel B	0.14	green
Channel N	0.14	yellow
GND	0.5	black
Alarm	0.14	yellow/black

### ORDERING INFORMATION

Type	Model	Number of pulses	Supply voltage	Flange, Protection, Shaft	Output	Connection
<input type="checkbox"/>	<input type="checkbox"/>	<input type="text"/>	<input type="checkbox"/>	<input type="text"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>RI32-</b>	<b>0</b> Standard	<b>5 ... 1 500</b>	<b>A</b> DC 5 V <b>E</b> DC 10 - 30 V <sup>1</sup>	<b>R.11</b> Pilot, IP40, 6 mm * <b>R.14</b> Pilot, IP40, 5 mm **	<b>K</b> push-pull <sup>2</sup> short circuit proof <b>D</b> push-pull 5 V, ±30 mA	<b>A</b> Cable axial <b>B</b> Cable radial
<p>* flattened, see dimensional drawing  ** not flattened  <sup>1</sup> only with output K  <sup>2</sup> ±10 mA at 5 V, ±30 mA at 10 - 30 V</p>						

## Economy Types



- Replacement for type RI 39
- Encoder for universal installation by means of front/back panel mounting
- High efficiency by means of ball bearing
- Small torque
- Application e.g.:
  - FHP motors
  - laboratory equipment
  - labelling machines
  - plotters
  - length measuring machines

## NUMBER OF PULSES

5 / 10 / 20 / 25 / 28 / 32 / 50 / 60 / 72 / 100 / 128 / 144 / 200 / 250 / 256 / 288 / 300 / 360 / 400 / 500 / 512 / 600 / 720 / 900 / 1000 / 1024

Other number of pulses on request

TECHNICAL DATA  
mechanical

Shaft diameter	6 mm
Absolute max. shaft load	radial 10 N, axial 5 N
Absolute max. speed	10000 min <sup>-1</sup>
Torque	≤ 0.2 Ncm
Protection class (EN 60529)	Housing IP 50, bearings IP 40
Operating temperature	-10 ... +60 °C
Storage temperature	-25 ... +85 °C
Vibration resistance	100 m/s <sup>2</sup> (10 ... 2000 Hz)
Shock resistance	1000 m/s <sup>2</sup> (6 ms)
Connection	1.5 m cable, radial <sup>1</sup>
Housing	glassfibre reinforced plastic
Flange	Q = Square flange
Weight	approx. 60 g

<sup>1</sup> Other cable length on request

TECHNICAL DATA  
electrical


General design	as per DIN VDE 0160, protection class III, contamination level 2, over voltage class II	
Supply voltage (SELV)	with push-pull (D):	DC 5 V ± 10 %
	with push-pull (K):	DC 5 V <sup>1</sup> ± 10 % oder DC 10 - 30 V <sup>1</sup>
Max. current w/o load	40 mA (DC 5 V), 60 mA (DC 10 V), 30 mA (DC 24 V)	
Standard output versions <sup>2</sup>	push-pull (K, D):	A, B, N, $\overline{A}$ larm

<sup>1</sup> Pole protection

<sup>2</sup> Output description and technical data see chapter "Technical basics"

Economy Types

DIMENSIONAL DRAWINGS

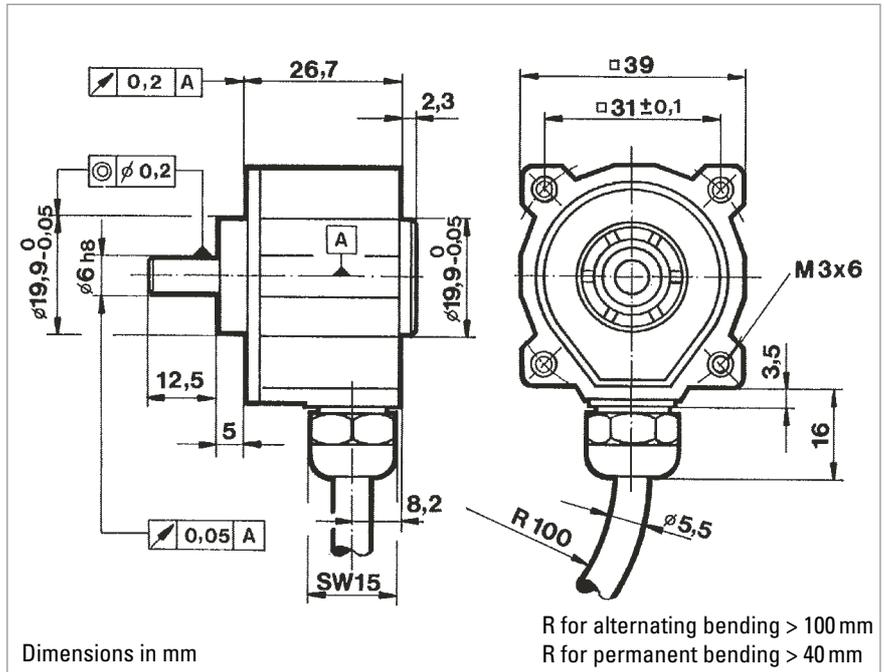

PIN ASSIGNMENT

Description (push-pull)	Lead Ø mm <sup>2</sup>	Colour
DC 5 V/10 - 30 V	0.5	red
Channel A	0.14	white
Channel B	0.14	green
Channel N	0.14	yellow
GND	0.5	black
Alarm	0.14	yellow/black

ORDERING INFORMATION

Type	Model	Number of pulses	Supply voltage	Flange, Protection, Shaft	Output	Connection
<input type="checkbox"/>	<input type="checkbox"/>	<input type="text"/>	<input type="checkbox"/>	<input type="text"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>RI38-</b>	<b>0</b> Standard	<b>5 ... 1 024</b>	<b>A</b> DC 5 V <b>E</b> DC 10 - 30 V <sup>1</sup>	<b>Q.16</b> Square, IP40, 6 mm	<b>K</b> push-pull <sup>2</sup> short circuit proof <b>D</b> push-pull 5 V, ±30 mA	<b>B</b> Cable radial

<sup>1</sup> only with output K  
<sup>2</sup> ±10 mA at 5 V, ±30 mA at 10 - 30 V

## Economy Types



- Replacement for type RIM
- Economical miniature encoder
- Up to 14 400 steps with 3 600 pulses
- High mechanical efficiency
- Application e.g.
  - wood working machines
  - FHP motors
  - graphic machines
  - table robots

## NUMBER OF PULSES

5 / 10 / 20 / 25 / 28 / 32 / 50 / 60 / 72 / 100 / 128 / 144 / 200 / 250 / 256 / 288 / 300 / 360 / 400 / 500 / 512 / 600 / 720 / 900 / 1000 / 1024 / 1250 / 1500 / 2000 / 2048 / 2500 / 3000 / 3600  
 Other number of pulses on request

TECHNICAL DATA  
mechanical

Shaft diameter	6 mm
Absolute max. shaft load	radial 10 N, axial 5 N
Absolute max. speed	10 000 min <sup>-1</sup>
Torque	≤ 0.2 Ncm
Protection class (EN 60529)	Housing IP 50, bearings IP 40
Operating temperature	-10 ... +70 °C
Storage temperature	-25 ... +85 °C
Vibration resistance (IEC 68-2-6)	100 m/s <sup>2</sup> (10 ... 2000 Hz)
Shock resistance (IEC 68-2-27)	1000 m/s <sup>2</sup> (6 ms)
Connection	1.5 m cable, radial <sup>1</sup>
Housing	Aluminium
Flange	Pilot flange
Weight approx.	60 g

<sup>1</sup> Other cable length on request

TECHNICAL DATA  
electrical


General design	as per DIN VDE 0160, protection class III, contamination level 2, overvoltage class II
Supply voltage (SELV)	with push-pull (D): DC 5 V ±10 % with push-pull (K): DC 5 V <sup>2</sup> ±0 % oder DC 10.- 30 V <sup>2</sup>
Max. current w/o load	40 mA (DC 5V), 60 mA (DC 10 V), 30 mA (DC 24 V)
Standard output versions <sup>3</sup>	push-pull (K, D): A, B, N, Alarm

<sup>2</sup> Pole protection

<sup>3</sup> Output description and technical data see chapter "Technical basics"

## Economy Types

### DIMENSIONAL DRAWINGS

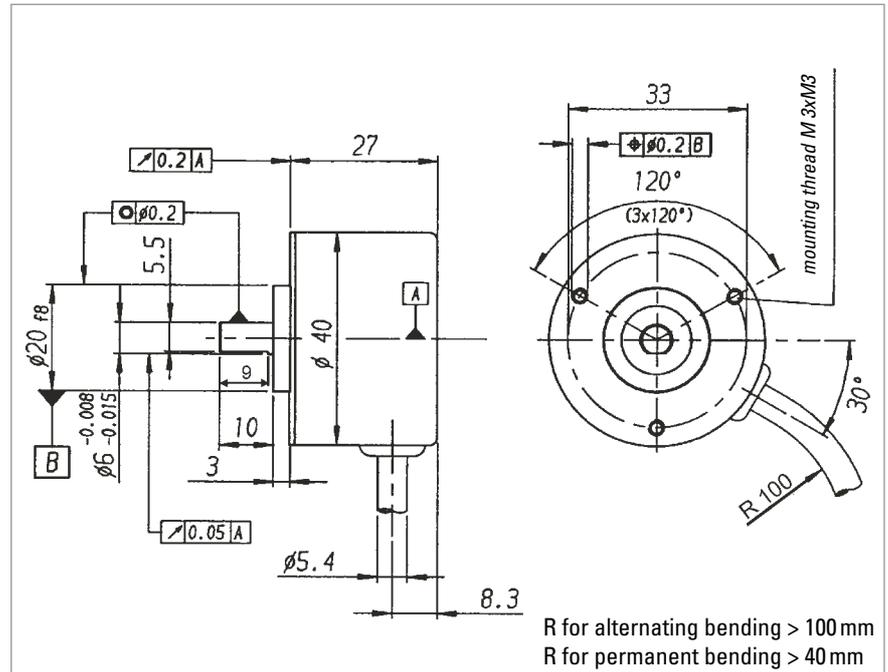

### PIN ASSIGNMENT

Description (push-pull)	Lead $\varnothing$ mm <sup>2</sup>	Colour
DC 5 V/10 - 30 V	0.5	red
Channel A	0.14	white
Channel B	0.14	green
Channel N	0.14	yellow
GND	0.5	black
Alarm	0.14	yellow/black
screen <sup>1</sup>		screen <sup>1</sup>

<sup>1</sup> not connected with encoder housing

### ORDERING INFORMATION

Type	Model	Number of pulses	Supply voltage	Flange, Protection, Shaft	Output	Connection
<input type="checkbox"/>	<input type="checkbox"/>	<input type="text"/>	<input type="checkbox"/>	<input type="text"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>RI41-</b>	<b>0</b> Standard	<b>5 ... 3 600</b>	<b>A</b> DC 5 V <b>E</b> DC 10 - 30 V <sup>1</sup>	<b>R.16</b> Pilot, IP40, 6 mm	<b>K</b> push-pull <sup>2</sup> short circuit proof <b>D</b> push-pull 5 V, $\pm 30$ mA	<b>B</b> Cable radial

<sup>1</sup> only with output K  
<sup>2</sup>  $\pm 10$  mA at 5 V,  $\pm 30$  mA at 10 - 30 V

## Economy Types



- Economy encoder
- High protection IP 65
- Push-pull or NPN-O.C.
- Applications, e.g.
  - textile machinery

## NUMBER OF PULSES

5 / 10 / 20 / 25 / 28 / 32 / 50 / 60 / 72 / 100 / 128 / 144 / 200 / 250 / 256 / 288 / 300 / 360 / 400 / 500 / 512 / 600 / 720 / 900 / 1000 / 1024  
 Other number of pulses on request

TECHNICAL DATA  
mechanical

Shaft diameter	6 mm
Absolute max. shaft load	radial 10 N, axial 5 N
Absolute max. speed	10 000 min <sup>-1</sup>
Torque	≤ 1 Ncm
Protection class (EN 60529)	Housing IP 65, bearings IP 64
Operating temperature	0 ... +60 °C
Storage temperature	-25 ... +85 °C
Vibration resistance (IEC 68-2-6)	100 m/s <sup>2</sup> (10 ... 2000 Hz)
Shock resistance (IEC 68-2-27)	1000 m/s <sup>2</sup> (6 ms)
Connection	1.5 cable axial <sup>1</sup>
Material	Housing: plastic, Flange: aluminium
Flange	Pilot flange
Weight approx.	75 g

<sup>1</sup> Other cable length on request

TECHNICAL DATA  
electrical

General design	as per DIN VDE 0160, protection class III, contamination level 2, overvoltage class II
Supply voltage (SELV)	with push-pull (D): DC 5 V ±10 % with push-pull (K): DC 5 V <sup>1</sup> ±10 % oder DC 10 - 30 V <sup>1</sup> with push-pull complementary (I): DC 10 - 30 V <sup>1</sup> at NPN-O.C. (S): DC 10 - 24 V <sup>1</sup>
Max. current w/o load	40 mA (DC 5V), 30 mA (DC 24V) with push-pull (K,I) 40 mA (DC 24V), bei NPN-O.C. (S)
Standard output versions	push-pull <sup>2</sup> / push-pull complementary <sup>2</sup> /NPN-O.C. <sup>3</sup>

<sup>1</sup> Pole protection


<sup>2</sup> Output description and technical data see chapter "Technical basics"

<sup>3</sup> NPN-O.C. with internal pull-up resistor = 10 KΩ, max. pulse frequency = 50 KHz, max. output lead = ± 30 mA, tolerance ± 30° electrical, delay time 4μs

# Incremental Shaft Encoders      Type RI 42

## Economy Types

### DIMENSIONAL DRAWINGS

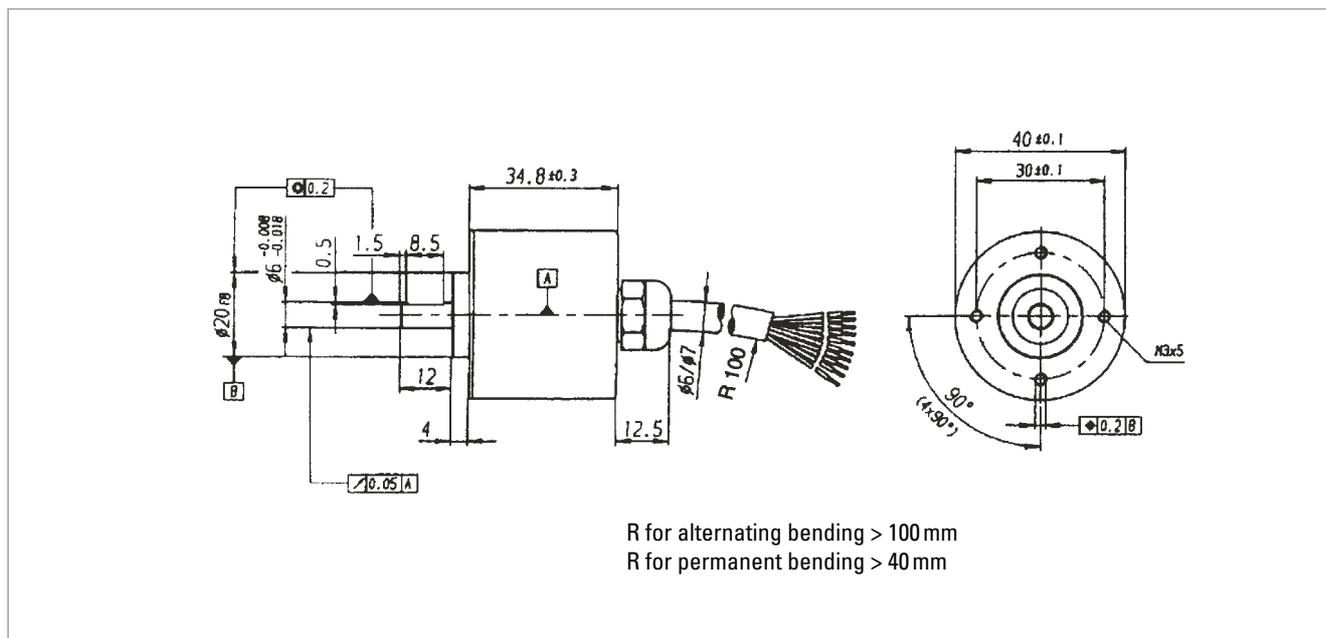

### PIN ASSIGNMENT

Colour (PVC)	Output circuit push-pull (K, D), Open Collector (S)	push-pull complementary (I)
white	Channel A	Channel A
white/brown		Channel $\bar{A}$
green	Channel B	Channel B
green/brown		Channel $\bar{B}$
yellow	Channel N	Channel N
yellow/brown		Channel $\bar{N}$
yellow/black	Alarm	Alarm
yellow/red		Sense $V_{CC}$
red	DC 5/10 - 30/10 - 24 V	DC 10 - 30 V
black	GND	GND

### ORDERING INFORMATION

Type	Model	Number of pulses	Supply voltage	Flange, Protection, Shaft	Output	Connection
<input type="checkbox"/>	<input type="checkbox"/>	<input type="text"/>	<input type="checkbox"/>	<input type="text"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>RI42-</b>	<b>0</b> Standard	<b>5 ... 1 024</b>	<b>A</b> DC 5 V <sup>1</sup> <b>E</b> DC 10 - 30 V <sup>2</sup> <b>C</b> DC 10 - 24 V <sup>3</sup>	<b>R.41</b> Pilot, IP64, 6 mm	<b>K</b> push-pull <sup>4</sup> short circuit proof <b>D</b> push-pull 5 V, ± 30 mA <b>S</b> Open Collector NPN <b>I</b> push-pull complementary	<b>A</b> Cable axial

<sup>1</sup> only with output K, D

<sup>2</sup> only with output K, I

<sup>3</sup> only with output S

<sup>4</sup> ±10 mA at 5 V, ±30 mA at 10 - 30 V

# Incremental Shaft Encoders Type RX 70/71

## Explosion-proof encoders



RX 70



RX 71

Stainless steel

- Encoder for explosion group II
- Highest working reliability
- Application e.g.:
  - enamelling production lines
  - surfacing machines
  - bottling machines
  - mixers
  - silo works
- For absolute explosion-proof encoders, see "Absolute Encoders Type AX 70 / 71"


### NUMBER OF PULSES

1 / 2 / 3 / 4 / 5 / 10 / 15 / 20 / 25 / 30 / 35 / 40 / 45 / 50 / 60 / 64 / 70 / 72 / 80 / 100 / 125 / 128 / 144 / 150 / 180 / 200 / 230 / 250 / 256 / 300 / 314 / 350 / 360 / 375 / 400 / 460 / 480 / 500 / 512 / 600 / 625 / 635 / 720 / 750 / 900 / 1000 / 1024 / 1200 / 1250 / 1500 / 1600 / 1800 / 2000 / 2048 / 2500 / 3000 / 3480 / 3600 / 3750 / 3968 / 4000 / 4096 / 4800 / 5000 / 5400 / 6000 / 7200 / 7680 / 8000 / 8192 / 9000 / 10000

Other number of pulses on request

### EX-CLASSIFICATION

The incremental shaft encoder is available in explosion proof design with explosion proof enclosure "d" under RX 70 and RX 71 (stainless steel). The PTB has assured with the Declaration of Conformity that the RX 70 / 71 meets the requirements of safety and health according to EN 50014 and EN 50018. Therefore it is approved in explosive areas, code „Ex II 2 G/D E Ex d II C T4/T6 IP65/ IP66 135°C resp. 85°C“. For applications under tough environmental conditions and food industry the stainless steel version RX 71 is available.

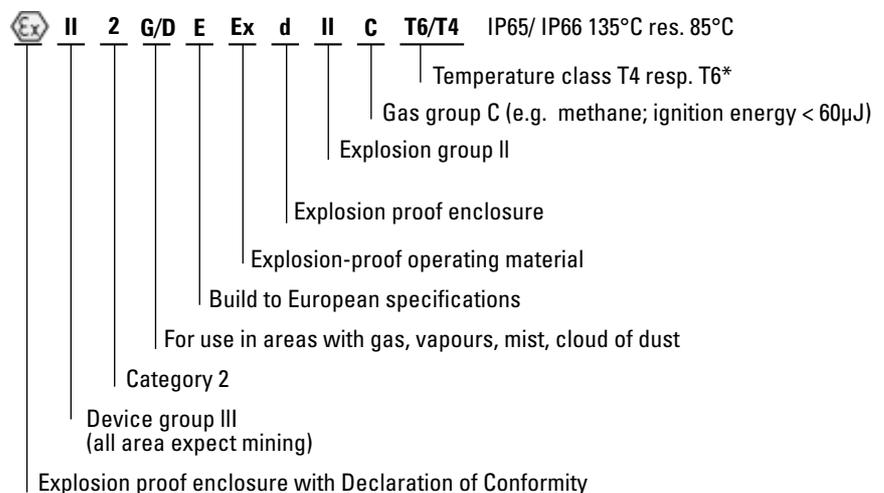

T6 = Highest permissible surface temperature +85°C (max. speed = 6000 U/min<sup>-1</sup>)  
 T4 = Highest permissible surface temperature +130°C (max. speed = 10000 U/min<sup>-1</sup>)

# Incremental Shaft Encoders Type RX 70/71

## Explosion-proof encoders

### TECHNICAL DATA mechanical

Shaft diameter	10 mm
Absolute max. shaft load	radial 100 N, axial 40 N
Absolute max. speed	10 000 min <sup>-1</sup> (EEx d IIC T4), 6 000 min <sup>-1</sup> (EEx d IIC T6)
Torque	≤ 1 Ncm
Moment of inertia	approx. 20 gcm <sup>2</sup>
Protection class (EN 60529)	Housing IP 65, bearings IP 64
Operating temperature	-10 ... +40 °C (EEx d IIC T6) -20 ... +60 °C (EEx d IIC T4)
Storage temperature	-25 ... +85 °C
Vibration resistance (IEC 68-2-6)	10 g = 100 m/s <sup>2</sup> (10...2000 Hz)
Shock resistance (IEC 68-2-27)	100 g = 1000 m/s <sup>2</sup> (6 ms)
Connection	5 m cable axial <sup>1</sup> for fixed layout
Size	Ø 70 mm
Flange	Clamping flange, Bohrungen 3 x M6
Weight approx.	1400 g

<sup>1</sup> Other cable length on request


### TECHNICAL DATA electrical

General design	as per DIN VDE 0160, protection class III, Contamination level 2, over voltage level II	
Supply voltage (SELV)	with RS 422 + Sense (T): DC 5V ± 10 % with RS 422 + Alarm (R): DC 5V ± 10 % oder DC 10 - 30 V <sup>1</sup> with push-pull (K, I): DC 10 - 30 V <sup>1</sup>	
Max. current w/o load	40 mA (5 VDC), 60 mA (10 VDC), 30 mA (24 VDC)	
Standard output versions <sup>2</sup>	RS 422 (R):	A, B, N, $\bar{A}$ , $\bar{B}$ , $\bar{N}$ , Alarm
	RS 422 (T):	A, B, N, $\bar{A}$ , $\bar{B}$ , $\bar{N}$ , Sense
	push-pull (K):	A, B, N, Alarm
	push-pull complementary (I):	A, B, N, $\bar{A}$ , $\bar{B}$ , $\bar{N}$ , Alarm

<sup>1</sup> Pole protection with supply voltage DC 10 - 30 V

<sup>2</sup> Output description and technical data see chapter "Technical basics"

### DIMENSIONAL DRAWINGS

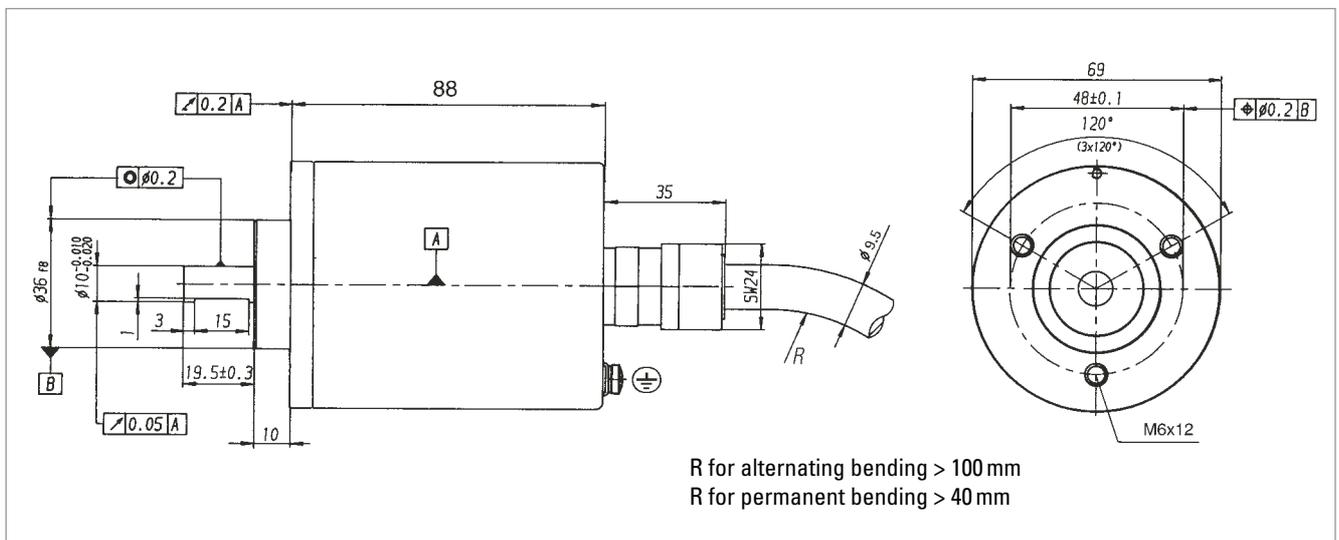

# Incremental Shaft Encoders Type RX 70/71

## Explosion-proof encoders

### PIN ASSIGNMENT

Cable No.	Output			
	RS 422+ Sense (T)	RS 422+ Alarm (R)	push-pull (K)	push-pull complementary (I)
12	DC 5 V	DC 5/10 - 30 V	DC 10 - 30 V	DC 10 - 30 V
11	GND	GND	GND	GND
10	Sense V <sub>CC</sub>			
9	Sense GND			
1	Channel A	Channel A	Channel A	Channel A
2	Channel $\bar{A}$	Channel $\bar{A}$		Channel $\bar{A}$
3	Channel B	Channel B	Channel B	Channel B
4	Channel $\bar{B}$	Channel $\bar{B}$		Channel $\bar{B}$
5	Channel N	Channel N	Channel N	Channel N
6	Channel $\bar{N}$	Channel $\bar{N}$		Channel $\bar{N}$
7		Alarm	Alarm	Alarm
screen	Cable screen connected to housing			
Screw terminal	for additional connection of an earth conductor			

### ORDERING INFORMATION

Type	Model	Number of pulses	Supply voltage	Flange, Protection, Shaft	Output	Connection
<input type="checkbox"/>	<input type="checkbox"/>	<input type="text"/>	<input type="checkbox"/>	<input type="text"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>RX70-T</b>	<b>I</b> Incremental	<b>1 ... 10 000</b>	<b>A</b> 5 V <sup>1</sup> <b>E</b> 10-30 V <sup>2</sup>	<b>K.42</b> Clamping, IP64, 10 mm	<b>K</b> push-pull short circuit proof <b>T</b> RS 422 + Sense <b>I</b> push-pull complementary <b>R</b> RS 422 + Alarm	<b>A</b> PVC cable axial (5m)
<sup>1</sup> with output T, R <sup>2</sup> with output K, I, R						

Type	Model	Number of pulses	Supply voltage	Flange, Protection, Shaft	Output	Connection
<input type="checkbox"/>	<input type="checkbox"/>	<input type="text"/>	<input type="checkbox"/>	<input type="text"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>RX71-T</b> Stainless steel	<b>I</b> Incremental	<b>1 ... 10 000</b> increments	<b>A</b> 5 V <sup>1</sup> <b>E</b> 10-30 V <sup>2</sup>	<b>K.42</b> Clamping, IP64, 10 mm	<b>K</b> push-pull short circuit proof <b>T</b> RS 422 + Sense <b>I</b> push-pull complementary <b>R</b> RS 422 + Alarm	<b>A</b> PVC cable axial (5m)
<sup>1</sup> with output T, R <sup>2</sup> with output K, I, R						

## Stainless steel encoders



- Stainless steel encoder with high protection class
- High corrosion resistance
- Use in the area of food production or if sea-water proof is required
- Application e.g.:
  - packing machines
  - bottling machines
  - washing plants
  - mixers
  - cranes
  - hoists
  - marine outfitters

## NUMBER OF PULSES

1 / 2 / 3 / 4 / 5 / 10 / 15 / 20 / 25 / 30 / 35 / 40 / 45 / 50 / 60 / 64 / 70 / 72 / 80 / **100** / 125 / 128 / 144 / 150 / 180 / 200 / 230 / **250** / 256 / 300 / 314 / 350 / 360 / 375 / 400 / 460 / 480 / **500** / 512 / 600 / 625 / 635 / 720 / 750 / 900 / **1000** / **1024** / 1200 / **1250** / 1500 / 1600 / 1800 / 2000 / 2048 / **2500** / 3000 / 3480 / **3600** / 3750 / 3968 / 4000 / **4096** / 4800 / **5000** / 5400 / 6000 / 7200 / 7680 / 8000 / 8192 / 9000 / 10000

Other number of pulses on request

Preferably available versions are printed in bold type.

TECHNICAL DATA  
mechanical

Shaft diameter	9.52 mm / 10 mm
Absolute max. shaft load	radial 60 N / axial 40 N
Absolute max. speed	10 000 min <sup>-1</sup>
Torque	≤ 1 Ncm
Moment of inertia	approx. 20 gcm <sup>2</sup>
Protection class (EN 60529)	Housing IP 67, bearings IP 67
Operating temperature	-10 ... +70 °C
Storage temperature	-25 ... +85 °C
Vibration resistance (IEC 68-2-6)	100 m/s <sup>2</sup> (10 ... 2000 Hz)
Shock resistance (IEC 68-2-27)	1000 m/s <sup>2</sup> (6 ms)
Connection	1.5 m cable <sup>1</sup> radial or axial
Housing	Stainless steel Ø 58 mm
Flange	Q=Square flange 63.5 x 63.5 mm
Weight approx.	620 g

<sup>1</sup> Other cable length on request

TECHNICAL DATA  
electrical


General design	as per DIN VDE 0160, protection class III, Contamination level 2, over voltage level II	
Supply voltage (SELV)	with RS 422 + Sense (T):	DC 5 V ± 10 %
	with RS 422 + Alarm (R):	DC 5 V ± 10 % oder DC 10 - 30 V <sup>2</sup>
	with push-pull (K, I):	DC 10 - 30 V <sup>22</sup>
Max. current w/o load	40 mA (DC 5 V), 60 mA (DC 10 V), 30 mA (DC 24 V)	
Standard output versions <sup>3</sup>	RS 422 (R):	A, B, N, $\overline{A}$ , $\overline{B}$ , $\overline{N}$ , $\overline{Alarm}$
	RS 422 (T):	A, B, N, $\overline{A}$ , $\overline{B}$ , $\overline{N}$ , Sense
	push-pull (K):	A, B, N, $\overline{Alarm}$
	push-pull complementary (I):	A, B, N, $\overline{A}$ , $\overline{B}$ , $\overline{N}$ , $\overline{Alarm}$

<sup>2</sup> Pole protection with supply voltage DC 10 - 30 V

<sup>3</sup> Output description and technical data see chapter "Technical basics"

## Stainless steel encoders

### DIMENSIONAL DRAWINGS

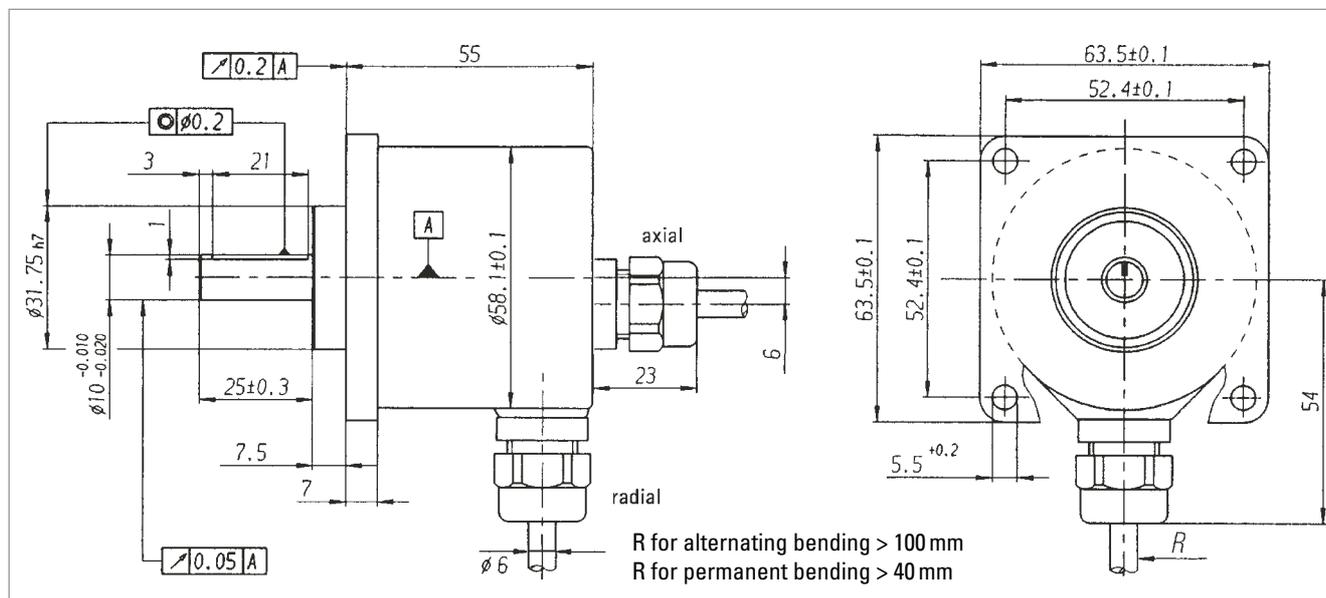

### PIN ASSIGNMENT

Connecting cable		Output	
Colour	Lead Ø	RS 422 T and R	push-pull K and I
red	0.5 mm <sup>2</sup>	DC 5/10 - 30 V	DC 10 - 30 V
red/yellow	0.14 mm <sup>2</sup>	Sense V <sub>CC</sub>	Sense V <sub>CC</sub>
white	0.14 mm <sup>2</sup>	Channel A	Channel A
white/brown	0.14 mm <sup>2</sup>	Channel $\bar{A}$	Channel $\bar{A}$ <sup>1</sup>
green	0.14 mm <sup>2</sup>	Channel B	Channel B
green/brown	0.14 mm <sup>2</sup>	Channel $\bar{B}$	Channel $\bar{B}$ <sup>1</sup>
yellow	0.14 mm <sup>2</sup>	Channel N	Channel N
yellow/brown	0.14 mm <sup>2</sup>	Channel $\bar{N}$	Channel $\bar{N}$ <sup>1</sup>
black	0.5 mm <sup>2</sup>	GND	GND
black/yellow	0.14 mm <sup>2</sup>	Alarm /Sense GND <sup>2</sup>	Alarm
screen <sup>3</sup>		screen <sup>3</sup>	screen <sup>3</sup>

<sup>1</sup> only push-pull complementary (I)

<sup>2</sup> depending on ordering code

<sup>3</sup> connected with encoder housing

### ORDERING INFORMATION

Type	Model	Number of pulses	Supply voltage	Flange, Protection, Shaft	Output	Connection
<input type="checkbox"/>	<input type="checkbox"/>	<input type="text"/>	<input type="checkbox"/>	<input type="text"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>RI59-</b>	<b>0</b> Standard	<b>1 ... 10 000</b>	<b>A</b> DC 5 V <b>E</b> DC 10 - 30 V	<b>0.7A</b> Square 63.5 x 63.5, IP67, 10 mm x 25 <b>0.7B</b> Square 63.5 x 63.5, IP67, 9.52 mm x 25	<b>T</b> RS 422 + Sense <b>K</b> push-pull short circuit proof <b>I</b> push-pull complementary <b>R</b> RS 422 + Alarm	<b>A</b> PVC cable axial <b>B</b> PVC cable radial

## Sine-wave encoders



- Harmonic distortion less than 1 %
- Extended temperature range, -40 ° to +100 °C
- 500 kHz sine-wave incremental signal frequency response
- All accessible components, including the electrical connections, are resistant to common industrial coolants and lubricants
- Self-monitoring and error compensation
- Secure against short-circuit and overload
- Hot plug
- Unit is protected against overloads of 10 V/50 ms
- 6 x 10 mm solid shaft

### TECHNICAL DATA mechanical

	<b>RIS 58-0 with solid shaft</b>
Protection bearings	IP 64 (IP 67 on request)
Protection housing	IP 65 (IP 67 on request)
Shaft diameter	6 mm
Maximaldrehzahl	12 000 min <sup>-1</sup>
Torque	≤ 1 Ncm
Absolute max. shaft load	axial 40N / radial 60N
Operating temperature	-40 ... +100 °C
Storage temperature	-20 ... +80 °C
Weight approx.	265 g
Vibration resistance (IEC 68-2-6)	100 m/s <sup>2</sup> (10 ... 2 000 Hz)
Shock resistance (IEC 68-2-27)	1 000 m/s <sup>2</sup> (6 ms)


### TECHNICAL DATA electrical

General design	as per DIN EN 61010-1, protection class III, Contamination level 2, over voltage level III
Supply voltage	DC 5 V ±10 % (SELV)
Max. current w/o load	max. 120 mA
Incremental signal	Sinus – Cosinus 1 V <sub>ss</sub>
Line count	1 000, 1 024, 2 048, 2 500
Absolute accuracy	±35"
Repeatability	±7"
Max. frequency	500 kHz
Reference signal	> 0.4 V (1 pulse/revolution)
Connection	Cable or conin, axial or radial

# Incremental Shaft Encoders Type RIS 58-0

## Sine-wave encoders

### DIMENSIONAL DRAWINGS RIS 58-0 with solid shaft

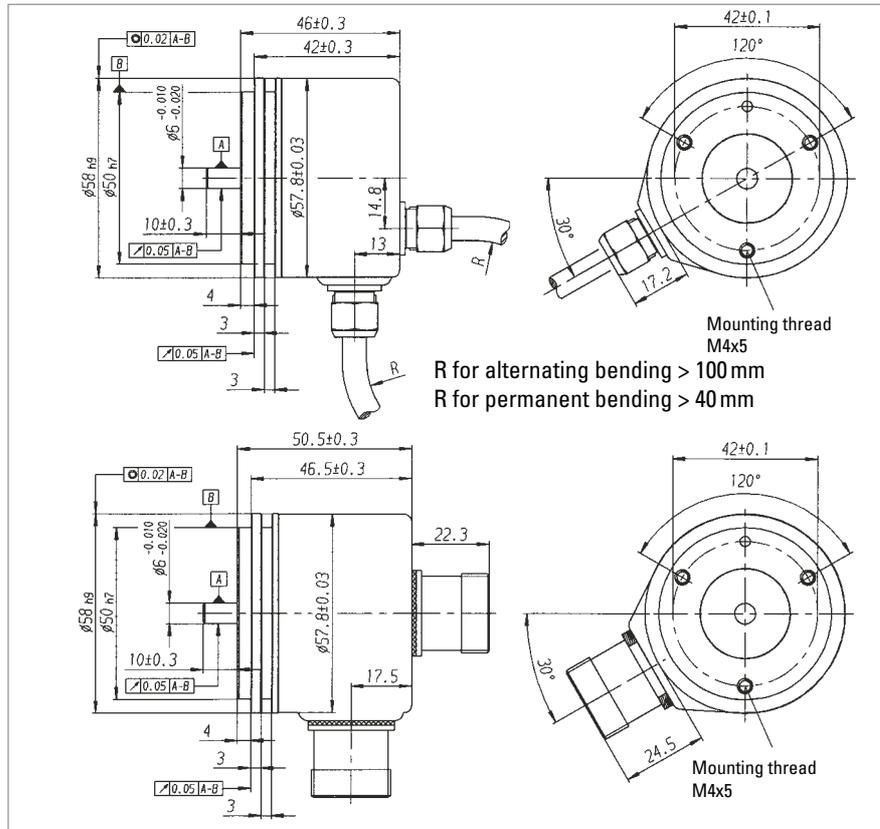

### PIN ASSIGNMENT

Signal	Conin 12 pole	TPE cable
+5 V	12	brown/green
0 V	10	white/green
A+	5	brown
A-	6	green
B+	8	grey
B-	1	pink
R+	3	red
R-	4	black
+5 V Sense	2	blue
N. C.	7	violet
N. C.	9	-
0V Sense	11	white
Housing	screen	screen

### ORDERING INFORMATION

Type	Model	Number of pulses	Supply voltage	Flange, Protection, Shaft	Output	Connection
<input type="checkbox"/>	<input type="checkbox"/>	<input type="text"/>	<input type="checkbox"/>	<input type="text"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>RIS58-</b>	<b>O</b> Standard	<b>1 000</b> <b>1 024</b> <b>2 048</b> <b>2 500</b>	<b>A</b> DC 5 V	<b>S.41</b> Synchro , IP64, 6 mm	<b>V</b> SinCos	<b>A</b> TPE cable axial <b>B</b> TPE cable radial <b>G</b> Conin connector axial, 12 pin male, ccw <b>H</b> Conin connector radial, 12 pin male, ccw

## Sine-wave encoders



- Harmonic distortion less than 1 %
- Extended temperature range, -40 ° to +100 °C
- 500 kHz sine-wave incremental signal frequency response
- All accessible components, including the electrical connections, are resistant to common industrial coolants and lubricants
- Self-monitoring and error compensation
- Secure against short-circuit and overload
- Hot plug
- Unit is protected against overloads of 10 V/50 ms
- 10 or 12 mm one sided open hub shaft with stator coupling

### TECHNICAL DATA mechanical

	<b>RIS 58-H with hollow shaft</b>
Protection bearings	IP 64
Protection housing	IP 65
Shaft diameter	10 mm, 12 mm
Max. speed	12000 min <sup>-1</sup>
Starting torque	< 1 Ncm
Torque support	
Axial compensations range	±1.5 mm
Radial compensations range	±0.2 mm
Operating temperature	-40 ... +100 °C
Storage temperature	-20 ... +80 °C
Weight approx.	270 g
Vibration resistance (IEC 68-2-6)	100 m/s <sup>2</sup> (10 ... 2000 Hz)
Shock resistance (IEC 68-2-27)	1000 m/s <sup>2</sup> (6 ms)


### TECHNICAL DATA electrical

General design	as per DIN EN 61010-1, protection class III, Contamination level 2, over voltage level III
Supply voltage	DC 5 V ±10 % (SELV)
Max. current w/o load	max. 120 mA
Incremental signal	Sinus – Cosinus 1 V <sub>ss</sub>
Line count	1 000, 1 024, 2 048, 2 500, 5 000
Absolute accuracy	±35"
Repeatability	±7"
Max. frequency	500 kHz
Reference signal	> 0.4 V (1 pulse/revolution)
Connection	TPE cable or conin, axial or radial

# Incremental Shaft Encoders Type RIS 58-H

## Sine-wave encoders

### DIMENSIONAL DRAWINGS RIS 58-H with hollow shaft

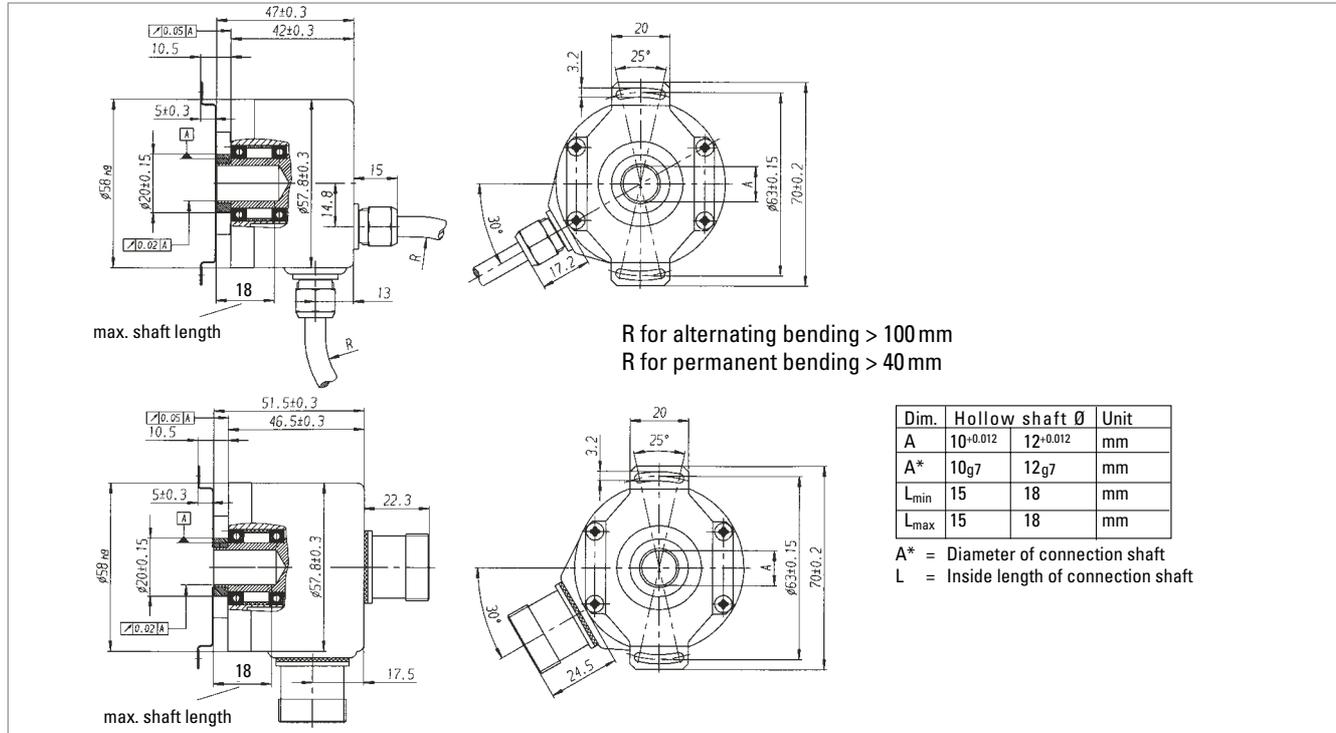

### PIN ASSIGNMENT

Signal	Conin 12 pole	TPE cable
+5 V	12	brown/green
0 V	10	white/green
A+	5	brown
A-	6	green
B+	8	grey
B-	1	pink
R+	3	red
R-	4	black
+5 V Sense	2	blue
N. C.	7	violet
N. C.	9	-
0V Sense	11	white
Housing	screen	screen

### ORDERING INFORMATION

Type	Model	Number of pulses	Supply voltage	Flange, Protection, Shaft	Output	Connection
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>RIS58-</b>	<b>H</b> Hollow shaft	<b>1 000</b> <b>1 024</b> <b>2 048</b> <b>2 500</b> <b>5 000</b>	<b>A</b> DC 5 V	<b>F.42</b> Hubshaft with tether, IP 64, 10 mm <b>F.47</b> Hubshaft with tether, IP 64, 12 mm	<b>V</b> SinCos	<b>A</b> TPE cable axial <b>B</b> TPE cable radial <b>G</b> Conin connector axial, 12 pin male, ccw <b>H</b> Conin connector radial, 12 pin male, ccw

## Absolute Shaft Encoders



Absolute shaft encoders, also known as shaft-angle encoders, are by no means used only to detect angular positions. They are also suitable for linear movements that can be converted into rotary movements by a toothed belt, drive pinion, or wire winch.

The special feature of absolute shaft encoders is that they assign a unique, digitally encoded signal to each individual measured increment. The method of transducing prevents erroneous readings, whether by a power failure, or by a transient malfunction. After the encoder is switched on again, or power is restored, the position can be read out. It is not necessary to move to a reference position, as it is for shaft encoders of the incremental type.

### Examples of application for absolute encoders

- overhead support robots
- ventilation flaps
- spinning machines
- conveyor belts
- cam controllers
- injection moulding machines
- packaging machinery
- extruders
- folding machines
- printing machines
- high lift storage systems
- stamping machines

# Absolute Shaft Encoders - ACURO industry

## AC 36 - BiSS / SSI

### Special Features

- Compact design for single or multiturn
- Interfaces: standard SSI, expanded SSI mode or BiSS
- Use of sine / cosine signals for fast control tasks possible




Type	AC36 - BiSS / SSI
<b>Technical Data - mechanical</b>	
Housing diameter	37.5 mm
Protection class shaft input	IP 64
Protection class housing	IP 64
Flange	pilot flange
Shaft diameter	6 mm
Max. speed	Continuous: 10 000 min <sup>-1</sup> , Short term: 12 000 min <sup>-1</sup>
Starting Torque	0,01 Nm
Moment of inertia	2.5 x 10 <sup>-6</sup> kgm <sup>2</sup>
Spring tether (hollow shaft)	
Tolerance axial / radial	± 0.5 mm / ± 0.05 mm
Shock resistance DIN EN 60068-2-27	1 000 m/s <sup>2</sup> (6 ms)
Vibration resistance DIN EN 60068-2-27	100 m/s <sup>2</sup> (10 ... 2 000 Hz)
Operating temperature	-25 ... +100 °C
Storage temperature	-15 ... +85 °C (because of packing)
Weight approx. ST/MT	80 g / 130 g
<b>Technical Data - electrical</b>	
Supply voltage	DC 5 V, -5 % / + 10 %
Max. current w/o load ST/MT	50 mA / 100 mA
Interface	BiSS or Standard SSI
Lines / Drives	Clock and Data / RS422
Output code	Gray
Resolution singleturn	13 Bit ... max. 17 Bit
Resolution multiturn	12 Bit
Incremental signals	Sinus - Cosinus 1 V <sub>ss</sub>
Number of pulses	2048
3 dB limiting frequency	500 kHz
Alarm output	Alarm bit (SSI option), warning bit and alarm bit (BiSS)
Connection	Cable axial or radial
Page	108

# Absolute Shaft Encoders - ACURO industry

## AC 58 - BiSS / SSI, Parallel

### Special Features

- Compact design for single or multiturn
- Aids for start-up and operation: diagnostic LED, preset key with optical response
- Interfaces: standard SSI, expanded SSI mode or BiSS
- Use of sine / cosine signals for fast control tasks possible

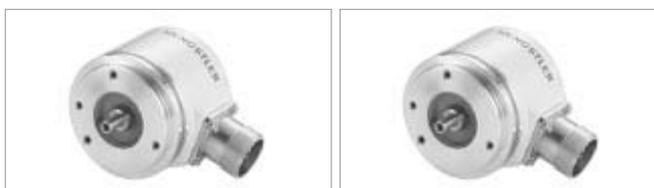

Type	AC 58 - BiSS / SSI	AC 58 - Parallel
<b>Technical Data - mechanical</b>		
Housing diameter	58 mm	58 mm
Protection class shaft input	IP 64 or IP 67	IP 64 or IP 67
Protection class housing	IP 64 (IP 67 optional)	ST: IP 67 MT: IP 64 (IP 67 optional)
Flange	Synchro flange, clamping flange, hubshaft with tether, square flange	Synchro flange, clamping flange, hubshaft with tether, square flange
Shaft diameter	Solid shaft 6 mm, 10 mm; Hub shaft 10 mm, 12 mm	Solid shaft 6 mm, 10 mm; Hub shaft 10 mm, 12 mm
Max. speed	Continuous: 10 000 min <sup>-1</sup> , Short term: 12 000 min <sup>-1</sup>	Continuous: 10 000 min <sup>-1</sup> , Short term: 12 000 min <sup>-1</sup>
Shaft load	axial 40 N / radial 60 N	axial 40 N / radial 60 N
Operating temperature	-40 ... 85 °C	-40 ... 85 °C
Weight approx. ST/MT	260 g / 310 g	350 g / 400 g
<b>Technical Data - electrical</b>		
Supply voltage	DC 5 V, -5 % / + 10 % or DC 10 - 30 V	DC 10 - 30 V
Max. current w/o load ST/MT	50 mA / 100 mA	200 mA / 300 mA
Interface	BiSS or Standard SSI	Parallel
Resolution singleturn	10-17 Bit, Gray Excess: 360, 720 steps	10-14 Bit, Gray Excess: 360, 720 steps
Resolution multi turn	12 Bit	12 Bit
Optional incremental signals	Sine / Cosine 1 Vpp	
Number of pulses	2048	
Absolute accuracy	±35"	
Repeat accuracy	±7"	
Parameterization	Code type, direction of rotation, warning, alarm	
Control input	Direction	ST: <u>L</u> atch, <u>D</u> irection, <u>T</u> ristate MT: Tristate
Reset key	Latch via parameterization	only with MT
Alarm output	Alarm bit (SSI option), warning bit and alarm bit (BiSS)	NPN o.c. max. 5 mA
Status LED	Green = OK.; red = alarm	Green = OK.; red = alarm
Connection	Cable axial or radial Conin axial or radial M12, 8 pole	Cable axial or radial 17 pole Conin axial or radial 37 pole Sub-D
Page	111	116

# Absolute Shaft Encoders - ACURO industry

## AC 58 with Fieldbus Interfaces

### Special Features

- Overall length: 63 mm for singleturn, 73 mm for multiturn, including bus cover
- The complete bus specific electronics is integrated in the connection cover
- Option: Display "tico"
- Diagnostic LEDs in the bus cover



Type	AC 58 - Profibus	AC 58 - CANopen	AC 58 - CANLayer 2
<b>Technical Data - mechanical</b>			
Housing diameter	58 mm	58 mm	58 mm
Protection class shaft input	IP 64 or IP 67	IP 64 or IP 67	IP 64 or IP 67
Protection class housing	Bus cover: IP 67 Flange: IP 64 (IP 67 optional)	Bus cover: IP 67 Flange: IP 64 (IP 67 optional)	Bus cover: IP 67 Flange: IP 64 (IP 67 optional)
Flange	Synchro flange, clamping flange, hubshaft with tether, square flange	Synchro flange, clamping flange, hubshaft with tether, square flange	Synchro flange, clamping flange, hubshaft with tether, square flange
Shaft diameter	Solid shaft 6 mm, 10 mm; Hub shaft 10 mm, 12 mm	Solid shaft 6 mm, 10 mm; Hub shaft 10 mm, 12 mm	Solid shaft 6 mm, 10 mm; Hub shaft 10 mm, 12 mm
Max. speed	Continuous: 10 000 min <sup>-1</sup> , Short term: 12 000 min <sup>-1</sup>	Continuous: 10 000 min <sup>-1</sup> , Short term: 12 000 min <sup>-1</sup>	Continuous: 10 000 min <sup>-1</sup> , Short term: 12 000 min <sup>-1</sup>
Shaft load	axial 40 N / radial 60 N	axial 40 N / radial 60 N	axial 40 N / radial 60 N
Operating temperature	-40 ... 85 °C	-40 ... 85 °C	-40 ... 85 °C
Weight approx. ST/MT	350 g / 400 g	350 g / 400 g	350 g / 400 g
<b>Technical Data - electrical</b>			
Supply voltage	DC 10 - 30 V	DC 10 - 30 V	DC 10 - 30 V
Max. current w/o load ST/MT	220 mA / 250 mA	220 mA / 250 mA	220 mA / 250 mA
Interface	RS 485	CAN High-Speed according ISO/DIS 11898	CAN High-Speed according ISO/DIS 11898
Profile / Protocol	Profibus DP with encoder profile Class C2 (parameterizable)	CANopen accord. DS 301 with encoder profile DSP 406	CAN 2.0 A
Programmable	Resolution, preset, direction	Resolution, preset, direction	Direction, limit values
Output code	Binary	Binary	Binary
Transfer mode		Poll mode (only on request), Change of State (automatic if value changes), cyclical with adjustable cycle timer	Poll mode (only on request), Change of State (automatic if value changes), cyclical with adjustable cycle timer
Baud rate	is automatically set within a range of 9,6 Kbaud through 12 Mbaud	set via DIP switch within a range of 10 trough 1000 Kbit/s	set via DIP switch within a range of 10 trough 1000 Kbit/s
Resolution singleturn	10-14 Bit	10-14 Bit	10-14 Bit
Resolution multiturn	12 Bit	12 Bit	12 Bit
Integrated special functions	speed, acceleration, operating time	speed, acceleration, round axis, limit values	
Connection	Bus cover with: <ul style="list-style-type: none"> <li>• 3 M12 connectors</li> <li>• 3 sealed cable exits</li> <li>• double conin 12 pole radial cw</li> <li>• 4 pole M12 f. "tico" display + 2 sealed cable exits</li> </ul>	Bus cover with: <ul style="list-style-type: none"> <li>• 3 sealed cable exits</li> <li>• double conin 9 pole radial cw</li> </ul> Cable radial or axial Conin radial or axial, cw or ccw	Bus cover with: <ul style="list-style-type: none"> <li>• 3 sealed cable exits</li> <li>• double conin connectors 9 pole radial cw</li> </ul> Cable radial or axial Conin radial or axial, cw or ccw
Page	121	125	128

# Absolute Shaft Encoders - ACURO industry

## AC 58 with Fieldbus Interfaces

### Special Features

- Overall length: 63 mm for singleturn, 73 mm for multiturn, including bus cover
- The complete bus specific electronics is integrated in the connection cover
- Option: Display "tico"
- DiagnosticLEDs in the bus cover



Type	AC 58 - DeviceNet	AC 58 - Interbus	AC 58 - Suconet
<b>Technical Data - mechanical</b>			
Housing diameter	58 mm	58 mm	58 mm
Protection class shaft input	IP 64 or IP 67	IP 64 or IP 67	IP 64 or IP 67
Protection class housing	Bus cover: IP 67	Bus cover: IP 67 Flange: IP 64 (IP 67 optional)	Bus cover: IP 67 Flange: IP 64 (IP 67 optional)
Flange	Synchro flange, clamping flange, hubshaft with tether, square flange	Synchro flange, clamping flange, hubshaft with tether, square flange	Synchro flange, clamping flange, hubshaft with tether, square flange
Shaft diameter	Solid shaft 6 mm, 10 mm; Hub shaft 10 mm, 12 mm	Solid shaft 6 mm, 10 mm; Hub shaft 10 mm, 12 mm	Solid shaft 6 mm, 10 mm; Hub shaft 10 mm, 12 mm
Max. speed	Continuous: 10 000 min <sup>-1</sup> , Short term: 12 000 min <sup>-1</sup>	Continuous: 10 000 min <sup>-1</sup> , Short term: 12 000 min <sup>-1</sup>	Continuous: 10 000 min <sup>-1</sup> , Short term: 12 000 min <sup>-1</sup>
Shaft load	axial 40 N / radial 60 N	axial 40 N / radial 60 N	axial 40 N / radial 60 N
Operating temperature	-40 ... 85 °C	-40 ... 85 °C	-40 ... 85 °C
Weight approx. ST/MT	350 g / 400 g	350 g / 400 g	350 g / 400 g
<b>Technical Data - electrical</b>			
Supply voltage	DC 10 - 30 V	DC 10-30 V	DC 10-30 V
Max. current w/o load ST/MT	220 mA / 250 mA	220 mA / 250 mA	220 mA / 250 mA
Interface	CAN High-Speed according ISO/DIS 11898, CAN-Specification 2.0 A (11-Bit-Identifier)	Remote installation bus Interbus, ENCOM Profile K3 (parameterizable), K2	RS485
Profile / Protocol	DeviceNet nach Rev. 2.0, programmable encoder	K3 = ID-Code 37 K2 = ID-Code 36	SUCOnet-K1
Programmable	Resolution, preset, direction	Direction, scaling factor, preset, offset	Preset, offset, scaling factor, sequence of codes
Output code	Binary	32 Bit binary	Binary
Transfer mode	Poll mode (only on request), Change of State (automatic if value changes), cyclical with adjustable cycle timer		
Baud rate	set via DIP switches to 125, 250, 500 KBaud	500 KBaud according ENCOM	187,5 KBaud
Resolution singleturn	10-14 Bit	10-12 Bit	13 Bit
Resolution multiturn	12 Bit	12 Bit	12 Bit
Connection	Bus cover with: <ul style="list-style-type: none"> <li>• 2 sealed cable exits</li> <li>• 4 pole M12 f. "tico" display + 2 sealed cable exits</li> <li>• 5 pole M12</li> </ul>	Bus cover with: <ul style="list-style-type: none"> <li>• 3 sealed cable exits</li> <li>• 4 pole M12 f. "tico" Display + 2 sealed cable exits</li> <li>• double conin 9 pole Cable 12 pole, radial and axial</li> </ul>	on request
Page	131	134	on request

# Absolute Shaft Encoders - ACURO industry

## AC 58 - SSI programmable

### Special Features

- Compact design: 59mm length for single or multiturn
- Aids for start-up and operation: diagnostic LED, preset key with optical response
- Parameterization: resolution, code type, sense of rotation, output format, warning, alarm
- Parameters can be stored in a non-volatile memory



Type	AC 58 - SSI Programmable
<b>Technical Data - mechanical</b>	
Housing diameter	58 mm
Protection class shaft input	IP 64 or IP 67
Protection class housing	IP 64 (IP 67 optional)
Flange	Synchro flange, clamping flange, hubshaft with tether, square flange
Shaft diameter	Solid shaft 6 mm, 10 mm; Hub shaft 10 mm, 12 mm
Max. speed	Continuous: 10 000 min <sup>-1</sup> , Short term: 12 000 min <sup>-1</sup>
Shaft load	axial 40 N / radial 60 N
Operating temperature	-40 ... 85 °C
Weight approx. ST/MT	260 g / 310 g
<b>Technical Data - electrical</b>	
Supply voltage	DC 10 - 30 V
Max. current w/o load	max. 250 mA
Interface	SSI programmable
Resolution singleturn	10 - 17 Bit
Resolution multiturn	12 Bit
Parameterization	resolution, code type, sense of rotation, output format, warning, alarm
Control input	Direction, Preset 1, Preset 2
Alarm output	Alarm bit
Status LED	Green = ok.; red = alarm
Connection	Cable radial or axial Conin radial or axial, ccw
Page	138

# Absolute Shaft Encoders - ACURO industry

## AC 110 - BiSS / SSI

### Special Features

- Hollow shaft up to 50 mm
- Singleturn up to bis 17 Bit



Type	AC 110- Biss / SSI
<b>Technical Data - mechanical</b>	
Housing diameter	110 mm
Shaft diameter	up to 50 mm
Protection class shaft	IP 50 or IP 64
Protection class housing	IP 50 or IP 64
Flange	Hollowshaft with tether
Max. speed	IP 50: 3600 min <sup>-1</sup> IP 64: 1500 min <sup>-1</sup>
Spring tether (hollow shaft) Tolerance axial / radial	± 0.5 mm / ± 0.05 mm
Vibration resistance (IEC 68-2-6)	100 m/ s <sup>2</sup> (10 - 500 Hz)
Shock resistance (IEC 68-2-27)	1000 m/ s <sup>2</sup> (6 ms)
Operating temperature	-20 ...+70°C
Storage temperature	-50 ...+80°C
Weight approx.	1000 g
<b>Technical Data - electrical</b>	
Supply voltage	DC 5 V (-5 %/ +10 %) or DC 10-30 V
Max. current w/o load ST/MT	120 mA
Lines/ Drives	Clock and Data/ RS422
Output code	Binary or Gray
Resolution singleturn	10 - 17 Bit
Incremental signals	Sine - Cosine1 Vss
No. of increments	4096
3 dB limiting frequency	500 kHz
Absolute accuracy	± 35"
Repeatability	± 7"
Alarm output	alarm bit (SSI), warning bit and alarm bit (BiSS)
Connection	Cable axial or radial
Page	147

# Absolute Shaft Encoders

## Stainless Steel / Explosion-Proof



Type	AC 59/61	AX 70/ AX 71 (Stainless)
<b>Special Features</b>	<ul style="list-style-type: none"> <li>■ Compact design</li> <li>■ Protection class IP 67</li> <li>■ High corrosion resistance</li> <li>■ Robust design</li> <li>■ Resolution up to 29 Bit (17 Bit ST, 12 Bit MT)</li> <li>■ Connection with cable or with bus terminal box</li> <li>■ Applications:               <ul style="list-style-type: none"> <li>- Packaging machine for food and beverage</li> <li>- Ship equipment (e.g. cranes, winches, cable laying ships)</li> <li>- Offshore - Applications</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>■ ATEX certification for gas and dust explosion proof</li> <li>■ EX-classification: Ex II 2 G/D E Ex d II C T4/T6</li> <li>■ Same electrical performance as ACURO industry</li> <li>■ Protection class up to IP67</li> <li>■ Diameter only 70 mm</li> <li>■ Robust design</li> <li>■ Available with stainless steel</li> <li>■ Resolution up to 29 Bit (17 Bit ST, 12 Bit MT)</li> <li>■ Applications: enamelling production line, petro chemistry, bottling machines, mixers, silo works, mills</li> <li>■ Interfaces: SSI, SSI programmable, Profibus, CANopen</li> </ul>
<b>Technical Data – mechanical</b>		
Housing diameter		70 mm
Shaft diameter	10 mm	10 mm
Flange	Square flange 63.5 x 63.5 mm	Clamping flange
Max. speed	Short term: 10 000 min <sup>-1</sup> Continuous: 6 000 min <sup>-1</sup>	6 000 min <sup>-1</sup> (T6) 10 000 min <sup>-1</sup> (T4)
Torque	< 1 Ncm	≤ 1 Ncm
Moment of inertia	approx. 20 gcm <sup>2</sup>	approx. 20 gcm <sup>2</sup>
Max. shaft load	axial 40 N/ radial 60 N	axial 40 N/ radial 100 N
Vibration proof (IEC 68-2-6)	100 m/ s <sup>2</sup> (10 - 500 Hz)	100 m/ s <sup>2</sup> (10 - 500 Hz)
Shock resistance (IEC 68-2-27)	1000 m/ s <sup>2</sup> (6 ms)	1000 m/ s <sup>2</sup> (6 ms)
Operating temperature	SSI, BiSS, Parallel, SSI-P: -40...+100°C Profibus, CANopen, CANlayer2, DeviceNet, Interbus: -40...+ 85°C	-20 ... +60 °C (T4) -10 ... +40 °C (T6)
Storage temperature	40...+ 85°C	-25 ... +80 °C
Material Shaft/ Housing	Stainless steel	Aluminium (AX 70) Stainless steel (AX 71)
Weight approx. ST/MT	1088 g (AC 61), 680 g (AC 59)	1 000 g (AX 70), 1 900 g (AX 71)
<b>Technical Data – electrical</b>		
	The electrical data depend on the type of interface. Please refer to the specific interface chapter.	The electrical data depend on the type of interface. Please refer to chapter "AX 70 / AX 71".
Page	150	157

# Absolute Shaft Encoders ACURO industry

## Overview Functions and Versions

	SSI	BiSS	Parallel ST	Parallel MT	SSI para.	Profibus	DeviceNet	Interbus	CAN	CANopen
<b>Electrical</b>										
Supply 5 VDC	(Option)	•	(Option)							
Supply 10-30 VDC	•	•	•	•	•	•	•	•	•	•
Preset key with LED (not IP 67)	•	•	only LED	•	•					
<b>Diagnostics</b>										
- LED indication (bus cover)	•	•			•	•	•	•	•	•
- Warning		•				•				
- Alarm bit	(Option)	•				•	•	•	•	•
- Alarm output	(Option)	(Option)	•	•						
- Temperature measurement	(Option)	•								
Connection for "tico"						•	•	•	•	•
Parameterization (PC, over Parallel Port)	•	•		•						
Parameterization (Bus)						•	•	•	•	•
<b>Inputs</b>										
- Latch			•	•						
- Direction	•	•	•	•	•					
- 2 lines for present input					•					
- Tristate			•	•						
<b>Special Functions</b>										
- Speed						•			•	•
- Acceleration						•			•	•
- On time						•				•
- Round axis										•
- Limit values					•					•
Optional 1 Vpp	•	•		•	•					
<b>Connections</b>										
Bus cover, 3 cable screw						•		•	•	•
Bus cover, 2 cable screw+M12 for "tico"						•	•	•		
Bus cover, 2 cable screw							•			
Bus cover, 2 Conin 9-pole								•	•	•
Bus cover, 2 Conin 12-pole						•				
Bus cover, 3 M12 4-pole						•				
Bus cover, 1 M12 5-pole							•			
Cable axial / radial	•	•	•	•	•			•	•	•
Cable ax/rad 0.1 m+37-pole Sub-D				•						
Conin 12-pole ax/rad CW/CCW	•	•			•	•			•	•
Conin 17-pole ax/rad CW/CCW			•							
M12 8-pole ax/rad	•	•								
<b>Mechanical</b>										
Synchro fl., shaft 6x10 mm, IP64 or IP67	•	•	•	•	•	•	•	•	•	•
Clamping fl., shaft 10x19.5 mm, IP64 or IP67	•	•	•	•	•	•	•	•	•	•
Clamping fl., shaft 9.52x19.5 mm, IP64 or IP67	•	•	•	•	•	•	•	•	•	•
Hubshaft with tether 10 mm, IP64	•	•	•	•	•	•	•	•	•	•
Hubshaft with tether 12 mm, IP64	•	•	•	•	•	•	•	•	•	•
Hubshaft with tether 12,7 mm, IP64	•	•	•	•	•	•	•	•	•	•
Square flange, 63.5 mm, shaft 9.52x19.5 mm, IP64 or IP67	•	•	•	•	•	•	•	•	•	•
Square flange, 63.5 mm, shaft 10 x 19.5 mm, IP64 or IP67	•	•	•	•	•	•	•	•	•	•

PRELIMINARY



## APPLICATIONS

## TECHNICAL DATA mechanical

# Absolute Shaft Encoders

Type AC 36

## ACURO industry

BiSS / SSI

- Overall length 36 mm
- For equipment engineering and industry
- Up to 17 Bit singleturn and 12 Bit multiturn
- Hollow shaft 6 mm
- +100°C operating temperature
- 10 000 rpm continuous operation
- Optical encoder with a true geared multiturn
- SSI or BiSS interface
- Option Sinus 1Vss
- 500kHz bandwidth

The AC 36 is an absolute optical encoder with a true geared multiturn, optical sensing technology and 36 mm diameter. Equipped with a solid-shaft the AC 36 is mechanical compatible with all common incremental encoders. The compact design allows to replace the adequate incremental encoders directly. As a result the technical facilities of absolute encoders can be used for the first time in equipment engineering and also in medical engineering. The mechanical design consists of two ball bearings supported mechanical shaft assembly. The AC 36 complements the **ACURO-industry** series with small frame sizes and the same performance as 58 mm versions.

### BiSS-Interface

Unique within his class the AC 36 provides fully digital position data up to 17 bit (singleturn) and 12 bit (multi-turn) over the bidirectional synchronous interface with a variable clock rate up to 10 MHz. This corresponds a singleturn resolution of more than 130 000 measured steps. Backward compatibility is realized through the SSI interface together with 2048 sine -cosine periods per revolution.

### Integrated diagnostic system



The AC 36 is based on latest OptoAsic technology with an advanced diagnostic concept. A continuous plausibility check controls the internal signal processing for each increment. A code check guarantees that the encoder signal represents bit by bit the measured rotation. Also the operating temperature of the encoder can be measured, read out and monitored over warn and alarm bits with 8 bit resolution (1°C). Monitoring and controlling of the operating temperature ensures a maximum lifetime of the LED. Eventual failures are indicated early over warn bits.

Housing diameter	37.5 mm
Protection class shaft input	IP 64
Protection class housing	IP 64
Flange	pilot flange
Shaft diameter	6 mm
Max. speed	Continuous 10 000 min <sup>-1</sup> , short term 12 000 min <sup>-1</sup>
Starting torque	0.01 Nm
Moment of inertia	2.5 x 10 <sup>-6</sup> kgm <sup>2</sup>
Shock resistance DIN EN 60068-2-27	1 000 m/s <sup>2</sup> (6 ms)
Vibration resistance DIN EN 60068-2-6	100 m/s <sup>2</sup> (10 ... 2 000 Hz)
Operating temperature	-25...+100 °C
Storage temperature	-15...+85 °C (because of packing)
Weight approx. ST/MT	80 g / 130 g

### TECHNICAL DATA electrical

Supply voltage	5 V, -5 % /+10%
Max. current w/o load ST/MT	50 mA / 100mA
Interface	Standard SSI or BiSS
Lines / drives	Clock and Data / RS422
Output code	Gray
Resolution singleturn	13 Bit - 17 Bit
Resolution multiturn	12 Bit
Incremental signals optional	Sinus - Cosinus 1Vss
Number of pulses	2048
3dB limiting frequency	500 kHz
Alarm output	Alarm bit (SSI Option) warning bit and alarm bit (BiSS)
Connection	Cable axial or radial

### DIMENSIONAL DRAWINGS

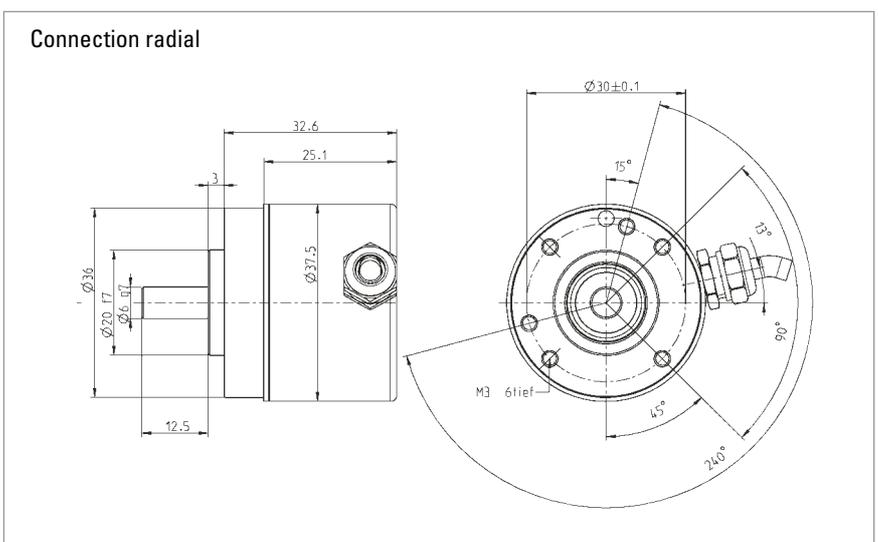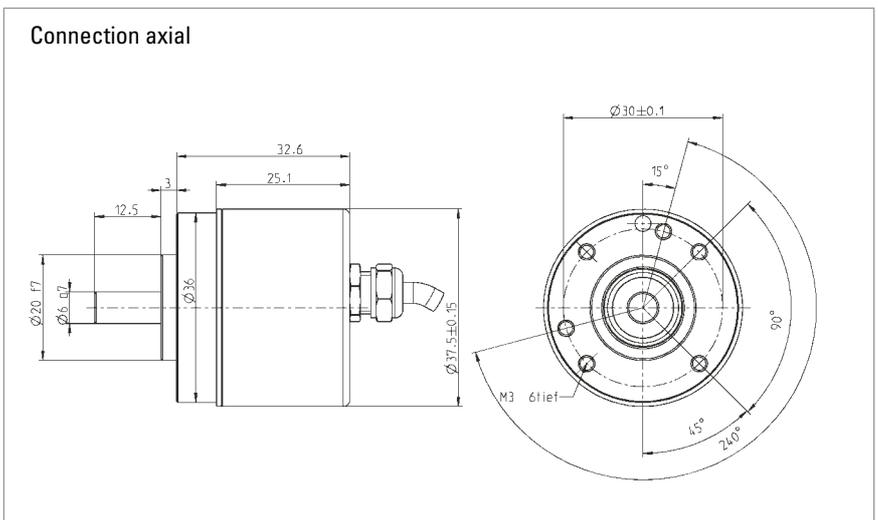

### PIN ASSIGNMENT

Signal	Colour 6 pole cable	Colour 12 pole cable
5 / 7-30 V (U <sub>B</sub> )	yellow/black	yellow/black
0V (U <sub>N</sub> )	white/green	white/green
Clock	white	white
$\overline{\text{Clock}}$	brown	brown
Data	black	black
$\overline{\text{Data}}$	violet	violet
A	nc.	green
$\overline{\text{A}}$	nc.	yellow
B	nc.	blue
$\overline{\text{B}}$	nc.	red
5 V Sensor	nc.	red/black
0V Sensor	nc.	brown/green

### ORDERING INFORMATION

Type	Resolution	Supply voltage	Flange, Protection, Shaft	Interface	Connection
<input type="text"/>	/ <input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
<b>AC 36</b>	<b>0012</b> 12 Bit ST <b>0013</b> 13 Bit ST <b>0014</b> 14 Bit ST <b>0017</b> 17 Bit ST <b>1213</b> 12 Bit MT+13 Bit ST <b>1217</b> 12 Bit MT+17 Bit ST (BiSS)	<b>A</b> 5 V <b>E</b> 7 - 30 V	<b>R.41</b> Clamping ring, IP 64, solid shaft 6 mm	<b>SC</b> SSI Gray + SinCos 1 Vpp *	<b>A</b> Cable axial 1.5 m 12 pole (Sincos) <b>B</b> Cable radial 1.5 m 12 pole (Sincos)
				<b>BI</b> BiSS <b>SG</b> SSI grey <b>SB</b> SSI binary	<b>E</b> Cable axial 1.5 m 6 pole <b>F</b> Cable radial 1.5 m 6 pole
* not available with connection E and F					



Synchro flange



Hub shaft

- Compact design: 50mm length for single or multiturn
- Aids for start up and operation: diagnostic LED, preset key with optical response, status information
- Use of sine/ cosine signals for fast control task possible
- Control input: Direction
- Resolution up to 29 Bit

### TECHNICAL DATA mechanical

Housing diameter	58 mm
Protection class shaft input	IP 64 or IP 67
Protection class housing	IP 64 (IP 67 optional)
Flange	Synchro flange, clamping flange, hubshaft with tether, square flange
Shaft diameter	Solid shaft 6 mm, 10 mm; Hub shaft 10 mm, 12 mm
Max. speed	Continuous 10 000 min <sup>-1</sup> , short term 12 000 min <sup>-1</sup>
Starting torque	≤ 0.01 Nm
Moment of inertia	3.8 x 10 <sup>-6</sup> kgm <sup>2</sup>
Spring tether (hollow shaft)	
Tolerance axial	±1.5 mm
Tolerance radial	±0.2 mm
Max. shaft load	axial 40 N / radial 60 N
Shock resistance DIN EN 60068-2-27	1 000 m/s <sup>2</sup> (6ms)
Vibration resistance DIN EN 60068-2-6	100 m/s <sup>2</sup> (10 ... 2.000 Hz)
Operating temperature	-40 ... 100 °C
Storage temperature	-25 ... 85 °C (because of packing)
Weight approx. ST/MT	260 g / 310 g

### TECHNICAL DATA electrical

Supply voltage	DC 5 V, -5 % / +10 % or DC 10–30 V
Max. current w/o load ST/MT	50 mA / 100 mA
Interface	Standard SSI or BiSS
Lines / drives	Clock and Data / RS422
Output code	Binary or Gray parameterization with ACURO soft
Linearity	± ½ LSB (± 1 LSB for resolution > 13 Bit)
Resolution singleturn	10–17 Bit , Gray Excess: 360, 720 increments
Resolution multiturn	12 Bit
Incremental signals optional	Sinus – Cosinus 1 Vss
Number of pulses	2048
3dB limiting frequency	500 kHz
Absolute accuracy	±35''
Repeatability	±7''
Parameterization with Acuro soft	Code type, direction, warning, alarm
Control input	Direction
Reset key	Disable via parameterization
Alarm output	Alarm bit (SSI Option), warning bit and alarm bit (BiSS)
Status LED	Green = ok.; red = alarm
Connection	Cable or conin, axial or radial

### DIMENSIONAL DRAWINGS

see chapter "Dimensional drawings ACURO industry", starting page 142

### RECOMMENDED DATA TRANSFER RATE WITH SSI

The max. data transfer rate depends on the cable length.  
For Clock/ Clock and Data/ Data please use twisted pairs. Use shielded cable.

Leitungslänge	Taktrate
< 50 m	< 400 kHz
< 100 m	< 300 kHz
< 200 m	< 200 kHz
< 400 m	< 100 kHz

### DATA FORMAT singleturn

Resolution	Data bits											
	T1...T9	T10	T11	T12	T13	T14	T15	T16	T17	T18	T19	
9 Bit <sup>1</sup>	S8...S0	0	0	0	0	0	W <sup>2</sup>					
10 Bit <sup>1</sup>	S9...S1	S0	0	0	0	0	W <sup>2</sup>					
11 Bit <sup>1</sup>	S10...S2	S1	S0	0	0	0	W <sup>2</sup>					
12 Bit <sup>1</sup>	S11...S3	S2	S1	S0	0	0	W <sup>2</sup>					
13 Bit <sup>1</sup>	S12...S4	S3	S2	S1	S0	0	W <sup>2</sup>					
14 Bit <sup>1</sup>	S13...S5	S4	S3	SS2	S1	S0	0	W <sup>2</sup>				
15 Bit <sup>1</sup>	S14...S6	S5	S4	S3	S2	S1	S0	0	W <sup>2</sup>			
16 Bit <sup>1</sup>	S15...S7	S6	S5	S4	S3	S2	S1	S0	0	W <sup>2</sup>		
17 Bit <sup>1</sup>	S16...S8	S7	S6	S5	S4	S3	S2	S1	S0	0	W <sup>2</sup>	

Examples for data format 9 Bit and 13 Bit with the optional bits alarm und parity

Resolution	Data bits											
	T1...T9	T10	T11	T12	T13	T14	T15	T16	T17	T18	T19	
9 Bit + P <sup>3</sup>	S8...S0	0	0	0	P	0	W <sup>2</sup>					
9 Bit + A <sup>4</sup>	S8...S0	0	0	0	A	0	W <sup>2</sup>					
9 Bit + P <sup>3</sup> + A <sup>4</sup>	S8...S0	0	0	0	A	P	0	W <sup>2</sup>				
13 Bit + P <sup>3</sup>	S12...S4	S3	S2	S1	S0	P	0	W <sup>2</sup>				
13 Bit + A <sup>4</sup>	S12...S4	S3	S2	S1	S0	A	0	W <sup>2</sup>				
13 Bit + P <sup>3</sup> + A <sup>4</sup>	S12...S4	S3	S2	S1	S0	A	P	0	W <sup>2</sup>			

### DATA FORMAT Multiturn

Resolution	Takte							
	T1...T12	T13...T21	T22	T23	T24	T25		
24 Bit <sup>1</sup>	M11...M0	S11...S2	S1	S0	0	W <sup>2</sup>		
25 Bit <sup>1</sup>	M11...M0	S11...S3	S2	S1	S0	0	W <sup>2</sup>	
26 Bit <sup>1</sup>	M11...M0	S11...S4	S3	S2	S1	S0	0	W <sup>2</sup>

Example for data format 24 Bit with the optional bits alarm und parity

24 Bit + P <sup>3</sup>	M11...M0	S11...S2	S1	S0	P	0	W <sup>2</sup>				
24 Bit + A <sup>4</sup>	M11...M0	S11...S2	S1	S0	A	0	W <sup>2</sup>				
24 Bit + P <sup>3</sup> + A <sup>4</sup>	M11...M0	S11...S2	S1	S0	P	A	0	W <sup>2</sup>			

S0 ... S16 Data bits for resolution per revolution

M0 ... M11 Data bits for number of revolutions (only for multiturn)

<sup>1</sup> Options (Parity bit, alarm and parity bit, zero bit) on request

<sup>2</sup> W: from this data bit on the data iteration for multiplex starts

<sup>3</sup> Parity bit :Even Parity (The parity bit expands the data bits to an even number of 1-bits). (Option)

<sup>4</sup> Alarm bit: is set to "1" when over temperature, under temperature, disc breakage and defect LED

### SYNCHRONOUS-SERIAL TRANSFER (SSI)

Synchronous readout of the encoder data is according to the clock rate given by the SSI-counterpart.

The number of clock rates is determined by the type of encoder (singleturn resp. multiturn) and the configuration of the special Bits as defined.

For multiple transactions (the stored value is readout several times successively) a fixed clock rate per transaction must be kept (for singleturn 13 resp. 14 clocks, for multiturn 25 resp. 26 clocks).

- In the rest position, when the last clock brush has passed by more than 30µs, the data output is logically at "1".
- With the first descending clock edge the encoder data and the special bits are loaded in the shift register of the encoder interface.

- With each ascending clock edge the data bits are serially readout, beginning with the MSB.

- At the end of the data transfer the data output is set to logically "0" for approx. 20µs.

If within these 20µs a further clock brush reaches the encoder interface, the already transferred data is readout once again.

This multiple transfer of the same data makes it possible to recognize transfer errors.

- After the 20µs the data output goes to its rest position, logically "1". Subsequently new encoder data can be readout.

### PIN ASSIGNMENT Conin & Cable

Cable	Flange connector	Signal
brown <sup>3</sup>	1	0V (supply voltage)
pink	2	Data
yellow	3	Clock
	4	N.C.
blue	5	Direction <sup>1</sup>
red	6	N.C.
violet	7	N.C.
white <sup>3</sup>	8	DC 5/10 - 30 V
	9	N.C.
grey	10	Data
green	11	Clock
black	12	0V-signal output <sup>2</sup>

<sup>1</sup> Direction: + U<sub>B</sub> or unconnected = ascending code values with rotation cw  
0 V = descending code values with rotation cw

<sup>2</sup> Connected with 0 V in the encoder. Use this output to lay Direction on logical "0" if required.


<sup>3</sup> use only the thin wires (∅ = 0.14 mm)

### PIN ASSIGNMENT M12



M12 Plug-in connector 8 pole		
Colour	Pin	Signal
white	1	DC 10 - 30 V
brown	2	0 V
	3	N.C.
green	4	Clock
pink	5	Data
yellow	6	Clock
blue	7	Direction <sup>1</sup>
grey	8	Data

<sup>1</sup> Direction: + U<sub>B</sub> or unconnected = ascending code values with rotation cw  
0 V = descending code values with rotation cw



View on connector

**ACCESSORIES**



	<b>Ordering code</b>
<b>M12 plug</b>	3 539 597

<b>Extension cable with M12 plug</b>	<b>Ordering code</b>
3 m	1 565 329
5 m	1 565 330
10 m	1 565 331

<b>Mating connector: 12 pin Conin</b>	<b>Cable</b>	<b>Ordering code</b>	<b>Ordering code</b>
turning right		3 539 202	3 280 220
turning left		3 539 229	

<b>Extension cable with plug</b>	<b>Ordering code</b>
turning right 3 m	1 542 003
5 m	1 542 004
10 m	1 542 005
turning left 3 m	1 542 010
5 m	1 542 011
10 m	1 542 012

	<b>Ordering code</b>
ACURO soft, PC connecting cable, incl. power pack 230 VA, for CONIN 12 pole, CCW (suited for supply voltage E and connection G or H)	on request

	<b>Ordering code</b>
Position indicationsigno-SSI	see chapter "Accessories" (page 228)

Mounting eccentric for synchronous flange	0 070 655
Diaphragm coupling (hub 6/6 mm)	3 520 081
Diaphragm coupling (hub 10/10 mm)	3 520 088

### ORDERING INFORMATION ACURO industry BiSS

Type	Resolution	Supply voltage	Flange, Protection, Shaft	Interface	Connection
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>AC58</b>	<b>0010</b> 10 Bit ST <b>0012</b> 12 Bit ST <b>0013</b> 13 Bit ST <b>0014</b> 14 Bit ST <b>0017</b> 17 Bit ST <b>0360</b> 360 increments ST <sup>1</sup> <b>0720</b> 720 increments ST <sup>2</sup> <b>1212</b> 12 Bit MT+12 Bit ST <b>1213</b> 12 Bit MT+13 Bit ST <b>1214</b> 12 Bit MT+14 Bit ST <b>1217</b> 12 Bit MT+17 Bit ST higher resolutions on request	<b>A</b> DC 5 V * <b>E</b> DC 10 - 30 V	<b>S.41</b> Synchro, IP64, 6x10mm <b>S.71</b> Synchro, IP67 <sup>3</sup> , 6x10mm <b>K.42</b> Clamping, IP64, 10x19.5mm <b>K.72</b> Clamping, IP67 <sup>3</sup> , 10x19.5mm <b>K.46</b> Clamping, IP64, 9.52x19.5mm <b>K.76</b> Clamping, IP67 <sup>3</sup> , 9.52x19.5mm <b>F.42</b> Hubshaft with tether, IP64, 10x19.5mm hollow shaft <b>F.47</b> Hubshaft with tether, IP64, 12x19.5mm hollow shaft <b>F.46</b> Hubshaft with tether, IP64, 9.52x19.5mm hollow shaft <b>Q.42</b> Square, IP64, 10x19.5mm <b>Q.72</b> Square, IP67 <sup>3</sup> , 10x19.5mm <b>Q.46</b> Square, IP64, 9.52x19.5mm <b>Q.76</b> Square, IP67 <sup>3</sup> , 9.52x19.5mm	<b>BI</b> BiSS (Digital) <b>BC</b> BiSS (+SinCos 1Vss) <sup>4</sup>	<b>A</b> Cable axial <b>B</b> Cable radial <b>C</b> Conin 12 pole axial cw <b>D</b> Conin 12 pole radial cw <b>G</b> Conin 12 pole axial ccw <b>H</b> Conin 12 pole radial ccw <b>7</b> M 12, 8 pole axial <b>8</b> M 12, 8 pole radial

<sup>1</sup> with Offset 76 (value range 76...435)

<sup>2</sup> with Offset 152 (value range 152...871)

<sup>3</sup> Protection class IP67 not available in combination with preset key and LED display

<sup>4</sup> not with connection "7" and "8"

\* max. cable length: 40 m

**Preferably available versions are printed in bold type.**

### ORDERING INFORMATION ACURO industry SSI

Type	Resolution	Supply voltage	Flange, Protection, Shaft	Interface	Connection
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>AC58</b>	<b>0010</b> 10 Bit ST <b>0012</b> 12 Bit ST <b>0013</b> 13 Bit ST <b>0014</b> 14 Bit ST <b>0017</b> 17 Bit ST <b>0360</b> 360 increments ST <sup>1</sup> <b>0720</b> 720 increments ST <sup>2</sup> <b>1212</b> 12 Bit MT+12 Bit ST <b>1213</b> 12 Bit MT+13 Bit ST higher resolutions on request	<b>A</b> DC 5 V * <b>E</b> DC 10 - 30 V	<b>S.41</b> Synchro, IP64, 6x10mm <b>S.71</b> Synchro, IP67 <sup>3</sup> , 6x10mm <b>K.42</b> Clamping, IP64, 10x19.5mm <b>K.72</b> Clamping, IP67 <sup>3</sup> , 10x19.5mm <b>K.46</b> Clamping, IP64, 9.52x19.5mm <b>K.76</b> Clamping, IP67 <sup>3</sup> , 9.52x19.5mm <b>F.42</b> Hubshaft with tether, IP64, 10x19.5mm hollow shaft <b>F.47</b> Hubshaft with tether, IP64, 12x19.5mm hollow shaft <b>F.46</b> Hubshaft with tether, IP64, 9.52x19.5mm hollow shaft <b>Q.42</b> Square, IP64, 10x19.5mm <b>Q.72</b> Square, IP67 <sup>3</sup> , 10x19.5mm <b>Q.46</b> Square, IP64, 9.52x19.5mm <b>Q.76</b> Square, IP67 <sup>3</sup> , 9.52x19.5mm	<b>SB</b> SSI Binary <b>SG</b> SSI Gray <b>SC</b> SSI Gray (+SinCos 1Vss) <sup>4</sup>	<b>A</b> Cable axial <b>B</b> Cable radial <b>C</b> Conin 12 pole axial cw <b>D</b> Conin 12 pole radial cw <b>G</b> Conin 12 pole axial ccw <b>H</b> Conin 12 pole radial ccw <b>7</b> M 12, 8 pole, axial <b>8</b> M 12, 8 pole, radial

<sup>1</sup> with Offset 76 (value range 76...435)

<sup>2</sup> with Offset 152 (value range 152...871)

<sup>3</sup> Protection class IP67 not available in combination with preset key and LED display for flange connector

<sup>4</sup> not with connection "7" and "8"

\* max. cable length: 40 m

**Preferably available versions are printed in bold type.**



Synchro flange



Hub shaft

- Compact design
- Aids for start up and operation: diagnostic LED, preset key with optical response, status information
- Output Tristate short circuit-proof
- Gray or Binary code
- Encoder monitoring

### TECHNICAL DATA mechanical

Housing diameter	58 mm
Protection class shaft input	IP 64 or IP 67
Protection class housing	IP 67 with ST, IP 64 with MT (IP 67 optional)
Flange	Synchro flange, clamping flange, hubshaft with tether, square flange
Shaft diameter	Solid shaft 6 mm, 10 mm; hub shaft 10 mm, 12 mm
Max. speed	Continuous 10 000 min <sup>-1</sup> , short term 12 000 min <sup>-1</sup>
Starting torque	≤ 0.01 Nm
Moment of inertia	3.8 x 10 <sup>-6</sup> kgm <sup>2</sup>
Spring tether (hollow shaft)	
Tolerance axial	±1.5 mm
Tolerance radial	±0.2 mm
Max. shaft load	axial 40 N / radial 60 N
Shock resistance DIN EN 60068-2-27	1 000 m/s <sup>2</sup> (6 ms)
Vibration resistance DIN EN 60068-2-6	100 m/s <sup>2</sup> (10 ... 2 000 Hz)
Operating temperature	-40 ... 100 °C
Storage temperature	-40 ... 85 °C
Weight approx. ST/MT	350 g / 400 g

### TECHNICAL DATA electrical

Supply voltage	DC 10–30 V
Max. current w/o load ST/MT	200 mA / 300 mA
Interface	Parallel
Output code	Binary, Gray, Gray Excess
Resolution singleturn	10 – 14 Bit, Gray Excess: 360, 720 increments
Resolution multiturn	12 Bit
Linearity	±1/2 LSB
Output current	30 mA per Bit, short-circuit-proof
Alarm output	NPN o.c. Max 5 mA
Control inputs	Latch, Direction, Tristate with ST, Tristate with MT
Connection	Cable, axial or radial Conin 17 pole, axial or radial Sub-D 37 pole

Note: preset key only with MT

### DIMENSIONAL DRAWINGS

see chapter "Dimensional drawings ACURO industry", starting page 142

**DATA OUTPUT LEVEL**

Supply voltage $U_B$	DC 5 V - 5 % +10 %	DC 10 - 30 V
Output level High	$\geq 3.5$ V (30 mA)	$\geq U_B - 2.2$ V (30 mA)
	$\geq 3.9$ V (10 mA)	$\geq U_B - 1.8$ V (10 mA)
Output level Low	$\leq 1.6$ V (30 mA)	$\leq 1.6$ V (30 mA)
	$\leq 1.2$ V (10 mA)	$\leq 1.2$ V (10 mA)
Rise time (1.5 m Cable)	$\leq 0.1$ $\mu$ s	$\leq 0.2$ $\mu$ s
Drop time (1.5 m Cable)	$\leq 0.05$ $\mu$ s	$\leq 0.1$ $\mu$ s

Control inputs <sup>1</sup>:

Input	Level logical (physical)	Function
Direction	1 (+ $U_B$ or open)	ascending code values when turning clockwise (cw)
	0 (0 V)	descending code values when turning clockwise (cw)
Latch	1 (+ $U_B$ or open)	encoder data continuously changing at output
	0 (0 V)	encoder data stored and constant at output
Tristate (with singleturn)	1 (+ $U_B$ or open)	outputs active
	0 (0 V)	outputs at high impedance (Tristate mode)
Tristate (with multiturn)	1 (+ $U_B$ )	outputs at high impedance (Tristate mode)
	0 (0 V or open)	outputs active

<sup>1</sup> Typical actuating delay time 10  $\mu$ s with push-pull selection; when selected via O.C., an external pull-down resistor (1 K $\Omega$ ) is required

### PIN ASSIGNMENT SINGLETURN, CABLE

Parallel interface with cable:					
Colour (PVC)	9 Bit / 360 incr.	10 Bit / 720 incr.	12 Bit	13 Bit	14 Bit
grey/pink	N.C.	N.C.	N.C.	N.C.	S0 (LSB)
brown/yellow	N.C.	N.C.	N.C.	S0 (LSB)	S1
brown/grey	N.C.	N.C.	S0 (LSB)	S1	S2
red/blue	N.C.	N.C.	S1	S2	S3
violet	N.C.	S0 (LSB)	S2	S3	S4
white/brown	S0 (LSB)	S1	S3	S4	S5
white/green	S1	S2	S4	S5	S6
white/yellow	S2	S3	S5	S6	S7
white/grey	S3	S4	S6	S7	S8
white/pink	S4	S5	S7	S8	S9
white/blue	S5	S6	S8	S9	S10
white/red	S6	S7	S9	S10	S11
white/black	S7	S8	S10	S11	S12
brown/green	S8 (MSB)	S9 (MSB)	S11 (MSB)	S12 (MSB)	S13 (MSB)
yellow	$\overline{\text{Tristate S0...S8}}$	$\overline{\text{Tristate S0...S9}}$	$\overline{\text{Tristate S0...S11}}$	$\overline{\text{Tristate S0...S12}}$	$\overline{\text{Tristate S0...S13}}$
pink	$\overline{\text{Latch}}$	$\overline{\text{Latch}}$	$\overline{\text{Latch}}$	$\overline{\text{Latch}}$	$\overline{\text{Latch}}$
green	$\overline{\text{Direction}}$	$\overline{\text{Direction}}$	$\overline{\text{Direction}}$	$\overline{\text{Direction}}$	$\overline{\text{Direction}}$
black	0 V	0 V	0 V	0 V	0 V
red	DC 5 V/10...30 V	DC 5 V/10...30 V	DC 5 V/10...30 V	DC 5 V/10...30 V	DC 5 V/10...30 V
brown	$\overline{\text{Alarm}}$	$\overline{\text{Alarm}}$	$\overline{\text{Alarm}}$	$\overline{\text{Alarm}}$	$\overline{\text{Alarm}}$

### PIN ASSIGNMENT SINGLETURN, FLANGE CONNECTOR

Parallel interface with flange connector 17 pole (Conin):					
Pin	9 Bit / 360 incr.	10 Bit / 720 incr.	12 Bit	13 Bit	14 Bit
1	S0 (LSB)	S0 (LSB)	S0 (LSB)	S12 (MSB)	S13 (MSB)
2	S1	S1	S1	S11	S12
3	S2	S2	S2	S10	S11
4	S3	S3	S3	S9	S10
5	S4	S4	S4	S8	S9
6	S5	S5	S5	S7	S8
7	S6	S6	S6	S6	S7
8	S7	S7	S7	S5	S6
9	S8 (MSB)	S8	S8	S4	S5
10	N.C.	S9 (MSB)	S9	S3	S4
11	N.C.	N.C.	S10	S2	S3
12	$\overline{\text{Tristate S0...S8}}$	$\overline{\text{Tristate S0...S9}}$	S11 (MSB)	S1	S2
13	$\overline{\text{Latch}}$	$\overline{\text{Latch}}$	$\overline{\text{Latch}}$	S0 (LSB)	S1
14	$\overline{\text{Direction}}$	$\overline{\text{Direction}}$	$\overline{\text{Direction}}$	$\overline{\text{Direction}}$	S0 (LSB)
15	0 V	0 V	0 V	0V	0 V
16	DC 5 V/10...30 V	DC 5 V/10...30 V	DC 5 V/10...30 V	DC 5 V/10...30 V	DC 5 V/10...30 V
17	$\overline{\text{Alarm}}$	$\overline{\text{Alarm}}$	$\overline{\text{Alarm}}$	$\overline{\text{Latch / Alarm}}$	$\overline{\text{Latch / Alarm}}$

### PIN ASSIGNMENT MULTITURN, CABLE

Parallel interface			Cable (TPE)		
Cable (TPE)	10 cm cable with 37 pole Sub-D-plug		Cable (TPE)	10 cm cable with 37 pole Sub-D-plug	
Farbe	Pin	Connection	Colour	Pin	Connection
brown	2	S0	white/blue	14	M4 <sup>1</sup>
green	21	S1	brown/blue	33	M5 <sup>1</sup>
yellow	3	S2	white/red	15	M6 <sup>1</sup>
grey	22	S3	brown/red	34	M7 <sup>1</sup>
pink	4	S4	white/black	16	M8 <sup>2</sup>
violet	23	S5	brown/black	35	M9 <sup>2</sup>
grey/pink	5	S6	grey/green	17	M10 <sup>2</sup>
red/blue	24	S7	yellow/grey	36	M11 <sup>2</sup>
white/green	6	S8	pink/green	18	Alarm
brown/green	25	S9	yellow/pink	10	Direction
white/yellow	7	S10	green/blue	30	Latch
yellow/brown	26	S11	yellow/blue	12	Tristate
white/grey	8	M0	red (0.5 mm <sup>2</sup> )	13	DC 10...30 V
grey/brown	27	M1	white (0.5 mm <sup>2</sup> )	31	DC 10...30 V
white/pink	9	M2	blue (0.5 mm <sup>2</sup> )	1	0 V
pink/brown	28	M3	black (0.5 mm <sup>2</sup> )	20	0 V

<sup>1</sup> N. C. with resolution 16 Bit (4 Bit MT)

<sup>2</sup> N. C. with resolution 16 Bit or 20 Bit (4 or 8 Bit MT)

### ACCESSORIES

	Ordering code
Mounting eccentric for synchronous flange	0 070 655
Diaphragm coupling (hub 6/6 mm)	3 520 081
Diaphragm coupling (hub 10/10 mm)	3 520 088

### ORDERING INFORMATION

Type	Resolution	Supply voltage	Flange, Protection, Shaft	Interface	Connection
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>AC58</b>	<b>0010</b> 10 Bit ST <b>0012</b> 12 Bit ST <b>0013</b> 13 Bit ST <b>0014</b> 14 Bit ST <b>0360</b> 360 increments ST <sup>1</sup> <b>0720</b> 720 increments ST <sup>2</sup> <b>0412</b> 4 Bit MT+12 Bit ST <b>0812</b> 8 Bit MT+12 Bit ST <b>1212</b> 12 Bit MT+12 Bit ST	E DC 10 - 30 V	<b>S.41</b> Synchro, IP64, 6x10mm <b>S.71</b> Synchro, IP67 <sup>3</sup> , 6x10mm <b>K.42</b> Clamping, IP64, 10x19.5mm <b>K.72</b> Clamping, IP67 <sup>3</sup> , 10x19.5mm <b>K.46</b> Clamping, IP64, 9.52x19.5mm <b>K.76</b> Clamping, IP67 <sup>3</sup> , 9.52x19.5mm <b>F.42</b> Hubshaft with tether, IP64, 10x19.5mm hollow shaft <b>F.47</b> Hubshaft with tether, IP64, 12x19.5mm hollow shaft <b>F.46</b> Hubshaft with tether, IP64, 9.52x19.5mm hollow shaft <b>Q.42</b> Square, IP64, 10x19.5mm <b>Q.72</b> Square, IP67 <sup>3</sup> , 10x19.5mm <b>Q.46</b> Square, IP64, 9.52x19.5mm <b>Q.76</b> Square, IP67 <sup>3</sup> , 9.52x19.5mm	<b>PB</b> Parallel Binary <b>PG</b> Parallel Gray	<b>A</b> Cable axial 1.5 m (ST/MT) <b>B</b> Cable radial 1.5 m (ST/MT) <b>U</b> Conin 17 pole axial ccw (ST) <b>V</b> Conin 17 pole radial ccw (ST) <b>W</b> Conin 17 pole axial cw (ST) <b>Y</b> Conin 17 pole radial cw (ST) <b>A-A1-F</b> 0.1m Cable axial + 37 pole Sub-D (MT) <b>B-B1-F</b> 0.1m cable radial + 37 pole Sub-D (MT)
<sup>1</sup> with Offset 76 (value range 76...435) <sup>2</sup> with Offset 152 (value range 152...871) <sup>3</sup> Protection class IP67 not available in combination with preset key and LED display <b>Preferably available versions are printed in bold type.</b>					



- Diagnostic LED
- Cable or M12-plug connector
- Output of speed, acceleration
- Programmable: Resolution, Preset, Direction
- Option: Display „tico“

### TECHNICAL DATA mechanical

Housing diameter	58 mm
Protection class shaft input	IP 64 or IP 67
Protection class housing	Connection bus cover IP 67 Connection flange socket IP 64 (IP 67 optional)
Flange	Synchro flange, clamping flange, hubshaft with tether, square flange
Shaft diameter	Solid shaft 6 mm, 10 mm; hub shaft 10 mm, 12mm
Max. speed	12 000 min <sup>-1</sup> (short term), 10 000 min <sup>-1</sup> (continuous)
Starting torque	≤ 0.5 Ncm
Moment of inertia	3.8 10 <sup>-6</sup> kgm <sup>2</sup>
Spring tether (hollow shaft)	
Tolerance axial	± 1.5 mm
Tolerance radial	± 0.2 mm
Max. shaft load	axial 40 N / radial 60 N
Vibration resistance (IEC 68-2-6)	100 m/s <sup>2</sup> (10 - 500 Hz)
Shock resistance (IEC 68-2-27)	1000 m/s <sup>2</sup> (6 ms)
Operating temperature	-40...+85 °C
Storage temperature	-40...+85 °C
Material shaft	Stainless steel
Material housing	Aluminium
Weight approx.	350 g (ST), 400 g (MT)

### TECHNICAL DATA electrical

Supply voltage	DC 10 - 30 V
Max. current w/o load ST/MT	220mA/ 250mA
EMC	EN 61326: Class A
Interface	RS 485
Protocol	Profibus DP with encoder profile class C2 (parameterizable)
General design	as per EN 61010-Part 1, protection class III, contamination level 2, overvoltage class II
Linearity	± ½ LSB (± 1 LSB for resolution 13, 14, 25, 26 Bit)
Output code	Binary
Resolution singleturn	10 to 14 Bit
Resolution multiturn	12 Bit
Baud rate	is automatically set within a range of 9.6 KBaud through 12 MBaud
Device address	adjustable with DIP switches
Programmable	Resolution, Preset, Direction

### TECHNICAL DATA electrical (continued)

Integrated special functions	Speed, acceleration, on time
Bus termination resistor	set via DIP switches
Connection	Bus cover with: <ul style="list-style-type: none"> <li>· 3 sealed cable exits</li> <li>· double conin 12 pole, cw, radial</li> <li>· 3 M12</li> <li>· 4 pole M12 f. "tico" display + 2 sealed cable exits</li> </ul>

### DIMENSIONAL DRAWINGS

see chapter "Dimensional drawings ACURO industry", starting page 142

### PIN ASSIGNMENT Bus cover with double conin

Pin	Bus cover with double conin		Description
	IN (pins)	OUT (socket)	
1		GND1	Data Ground (M5V) <sup>1</sup>
2	A	A	Receive/Transmit Data-Negative (A)
3			
4	B	B	Receive/Transmit Data-Positive (B)
5			
6		VCC1	+5 V signal output (P5V) <sup>1</sup>
7	DC 10 - 30 V	DC 10 - 30 V	Supply voltage +U <sub>B</sub> (P24)
8	0 V	0 V	Supply voltage Ground (M24)
9			
10			
11			
12			
screen	screen	screen	screen connected with encoder housing

<sup>1</sup> can be used as power supply for an external bus termination resistor

### PIN ASSIGNMENT Bus cover with 3 M12

Pin	Stecker 1	Stecker 2	Buchse
1		UB in	+5 V signal output (P5V) <sup>1</sup>
2	A in		A out
3		0 V in	Data Ground (M5V) <sup>1</sup>
4	B in		B out
5	screen	screen	screen


<sup>1</sup> can be used as power supply for an external bus termination resistor

### PIN ASSIGNMENT Bus cover with 3 sealed cable exits

Pin	Signal
1	UB in (DC 10 - 30V)
2	0 V in
3	UB out
4	0 V out
5	B in
6	A in
7	B out
8	A out

### STARTUP

The encoder can be easily and quickly installed and programmed with the GSD file.

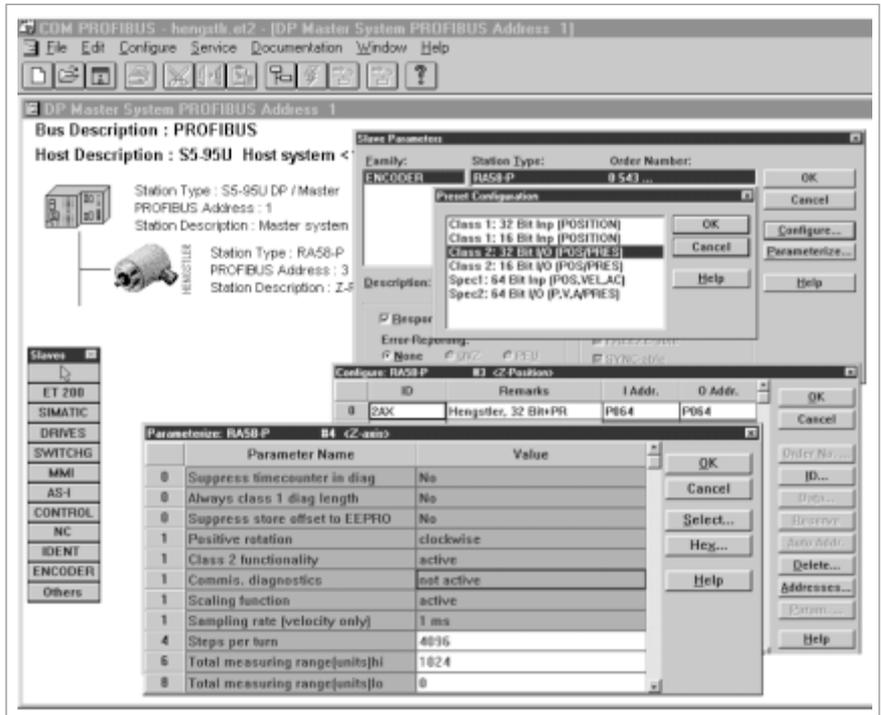

### ACCESSORIES



	Ordering code
GSD-file	www.hengstler.de
Technical manual, German	2 565 090 (Web)
Technical manual, English	2 565 255 (Web)
Clamping eccentric for synchro flange	0 070 655
Diaphragm coupling (hub 6/6 mm)	3 520 081
Diaphragm coupling (hub 10/10 mm)	3 520 088
Mating connector for connection I (Bus input, 12 pole, bushing, cw)	3 539 202
Mating connector for connection I (Bus output, 12 pole, pins, cw)	3 539 186
"Tico" display for connection T	0 731 205
Connection cable bus cover (connection T) to "tico" display, 1.5m	3 539 575

### ORDERING INFORMATION

Type	Resolution	Supply voltage	Flange, Protection, Shaft	Interface	Connection
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>AC58</b>	<b>0010</b> 10 Bit ST <b>0012</b> 12 Bit ST <b>0013</b> 13 Bit ST <b>0014</b> 14 Bit ST <b>1212</b> 12 Bit MT+12 Bit ST <b>1213</b> 12 Bit MT+13 Bit ST <b>1214</b> 12 Bit MT+14 Bit ST	<b>E</b> DC 10 - 30 V	<b>S.41</b> Synchro, IP64, 6x10mm <b>S.71</b> Synchro, IP67 <sup>1</sup> , 6x10mm <b>K.42</b> Clamping, IP64, 10x19.5mm <b>K.72</b> Clamping, IP67 <sup>1</sup> , 10x19.5mm <b>K.46</b> Clamping, IP64, 9.52x19.5mm <b>K.76</b> Clamping, IP67 <sup>1</sup> , 9.52x19.5mm <b>F.42</b> Hubshaft with tether, IP64, 10x19.5mm hollow shaft <b>F.47</b> Hubshaft with tether, IP64, 12x19.5mm hollow shaft <b>F.46</b> Hubshaft with tether, IP64, 9.52x19.5mm hollow shaft <b>Q.42</b> Square, IP64, 10x19.5mm <b>Q.72</b> Square, IP67 <sup>1</sup> , 10x19.5mm <b>Q.46</b> Square, IP64, 9.52x19.5mm <b>Q.76</b> Square, IP67 <sup>1</sup> , 9.52x19.5mm	<b>DP</b> Profibus	<b>I</b> Bus cover with double conin 12 pole cw radial <b>R</b> Bus cover with 3 M12 <b>T</b> Bus cover with 4 pole M12 f. "tico" display + 2 sealed cable exits <b>Z</b> Bus cover with 3 sealed cable exits
<sup>1</sup> Protection class IP67 not available in combination with preset key and LED display for flange connector <b>Preferably available versions are printed in bold type.</b>					



- Programmable: Resolution, Preset, Offset, Direction
- Output of speed and acceleration
- Operation timer
- Alarm and warning display
- Direction
- Option: display „tico“

### TECHNICAL DATA mechanical

Housing diameter	58 mm
Protection class shaft input	IP 64 or IP 67
Protection class housing	Connection bus cover IP 67 Connection flange socket IP 64 (IP 67 optional)
Flange	Synchro flange, clamping flange, hubshaft with tether, square flange
Shaft diameter	Solid shaft 6 mm, 10 mm; hub shaft 10 mm, 12mm
Max. speed	12 000 min <sup>-1</sup> (short term), 10 000 min <sup>-1</sup> (continuous)
Starting torque	≤ 0.5 Ncm
Moment of inertia	3.8 10 <sup>-6</sup> kgm <sup>2</sup>
Spring tether (hollow shaft)	
Tolerance axial	± 1.5 mm
Tolerance radial	± 0.2 mm
Max. shaft load	axial 40 N / radial 60 N
Vibration resistance (IEC 68-2-6)	100 m/s <sup>2</sup> (10 - 500 Hz)
Shock resistance (IEC 68-2-27)	1000 m/s <sup>2</sup> (6 ms)
Operating temperature	-40...+85 °C
Storage temperature	-40...+85 °C
Material shaft	Stainless steel
Material housing	Aluminium
Weight approx.	350 g (ST), 400 g (MT)

### TECHNICAL DATA electrical

Supply voltage	DC 10 - 30 V (SELV)
Max. current w/o load ST/MT	220 mA/ 250 mA
EMC	Noise emission according to EN 50081-2 Immunity to interference according to EN 50082-2
Interface	CAN High-Speed according to ISO/DIS 11898
Protocol	CANopen according to DS 301 with profile DSP 406, programmable encoder according class C2
General design	as per EN 61010-Part 1, protection class III, contamination level 2, overvoltage class II
Programmable	Resolution, Preset, Offset, Direction
Resolution singleturn	10 to 14 Bit
Resolution multiturn	12 Bit
Linearity	± ½ LSB (± 1 LSB for resolution 13, 14, 25, 26 Bit)
Output code	Binary
Integrated special functions	Speed, acceleration, round axis, limit values

### TECHNICAL DATA electrical (continued)

Updating of values	every millisecond (adjustable), on request
Basic identifier	set via DIP switches
Baud rate	set via DIP switches within a range of 10 through 1000 Kbit/s
Bus termination resistor	set via DIP switches
Connection	Cable radial or axial Conin radial or axial, cw or ccw Bus cover with: - 3 sealed cable exits - double conin 9 pole cw radial

### DIMENSIONAL DRAWINGS

see chapter "Dimensional drawings ACURO industry", starting page 142

### PIN ASSIGNMENT Bus cover with double conin

Conin-PIN	Bus cover with	
	Pin insert (IN)	Socket insert (OUT)
1	CAN in +	CAN out +
2	CAN in -	CAN out-
3	CAN GND in	CAN GND out
4	N.C.	N.C.
5	N.C.	N.C.
6	N.C.	N.C.
7	UB in	UB out
8	0 V in	0 V out
9	N.C.	N.C.
screen	screen <sup>1</sup>	screen <sup>1</sup>

<sup>1</sup> screen connected with encoder housing

### PIN ASSIGNMENT with conin or cable

Conin Pin	TPE cable	Cable pairs	Signal
7	yellow	Pair 1	CAN in+
2	green		CAN in -
4	pink	Pair 2	CAN out +
5	grey		CAN out -
3	blue	Pair 3	CAN GND in
11	brown		CAN GND out
12	white		UB in
10	brown		0 V in
screen		screen	screen

### PIN ASSIGNMENT Bus cover with 3 sealed cable exits

Connecting block KL 1 (10 pole)	
No.	Signal name
1	UB in (DC 10-30V)
2	0 V in
3	CAN in - (dominant L)
4	CAN in + (dominant H)
5	CAN GND in
6	CAN GND out
7	CAN out + (dominant H)
8	CAN out - (dominant L)
9	0 V out
10	UB out (DC 10-30V)

# Absolute Shaft Encoders

# Type AC 58

## ACURO industry

## CANopen

### ACCESSORIES

	Ordering code
EDS-file as download from our homepage	www.hengstler.de
Technical manual, German	2 565 250 (Web)
Clamping eccentric for synchro flange	0 070 655
Diaphragm coupling (hub 6/6 mm)	3 520 081
Diaphragm coupling (hub 10/10 mm)	3 520 088
Mating connector for connection I (Bus input, 9 pole, bushing, cw)	3 539 294
Mating connector for connection I (Bus output, 9 pole, pins, cw)	3 539 293
Mating connector for connection C; D (12 pole, cw, ccw)	3 539 202
Mating connector for connection G; H (12 pole, cw, ccw)	3 539 229
"Tico" display for connection T <b>(Caution: Neutralizes ohmic isolation)</b>	0 731 205
Connection cable bus cover (connection T) to "tico" 1.5m	3 539 575

### ORDERING INFORMATION

Type	Resolution	Supply voltage	Flange, Protection, Shaft	Interface	Connection
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>AC58</b>	<b>0010</b> 10 Bit ST <b>0012</b> 12 Bit ST <b>0013</b> 13 Bit ST <b>0014</b> 14 Bit ST <b>1212</b> 12 Bit MT+12 Bit ST <b>1213</b> 12 Bit MT+13 Bit ST <b>1214</b> 12 Bit MT+14 Bit ST	<b>E</b> DC 10 - 30 V	<b>S.41</b> Synchro, IP64, 6x10mm <b>S.71</b> Synchro, IP67 <sup>1</sup> , 6x10mm <b>K.42</b> Clamping, IP64, 10x19.5mm <b>K.72</b> Clamping, IP67 <sup>1</sup> , 10x19.5mm <b>K.46</b> Clamping, IP64, 9.52x19.5mm <b>K.76</b> Clamping, IP67 <sup>1</sup> , 9.52x19.5mm <b>F.42</b> Hubshaft with tether, IP64, 10x19.5mm hollow shaft <b>F.47</b> Hubshaft with tether, IP64, 12x19.5mm hollow shaft <b>F.46</b> Hubshaft with tether, IP64, 9.52x19.5mm hollow shaft <b>Q.42</b> Square, IP64, 10x19.5mm <b>Q.72</b> Square, IP67 <sup>1</sup> , 10x19.5mm <b>Q.46</b> Square, IP64, 9.52x19.5mm <b>Q.76</b> Square, IP67 <sup>1</sup> , 9.52x19.5mm	<b>OL</b> CANopen	<b>A</b> Cable axial <b>B</b> Cable radial <b>C</b> Conin 12 pole axial cw <b>D</b> Conin 12 pole radial cw <b>G</b> Conin 12 pole axial ccw <b>H</b> Conin 12 pole radial ccw <b>I</b> Bus cover with double conin 9 pole radial cw <b>Z</b> Bus cover with 3 sealed cable exits

<sup>1</sup> Protection class IP67 not available in combination with preset key and LED display for flange connector  
**Preferably available versions are printed in bold type.**



- Poll and auto mode
- Warning display
- Direction

### TECHNICAL DATA mechanical

Housing diameter	58 mm
Protection class shaft input	IP 64 or IP 67
Protection class housing	Connection bus cover IP 67
	Connection flange socket IP 64 (IP 67 optional)
Flange	Synchro flange, clamping flange, hubshaft with tether, square flange
Shaft diameter	Solid shaft 6 mm, 10 mm; hub shaft 10 mm, 12mm
Max. speed	12000 min <sup>-1</sup> (short term), 10000 min <sup>-1</sup> (continuous)
Starting torque	≤ 0.5 Ncm
Moment of inertia	3.8 · 10 <sup>-6</sup> kgm <sup>2</sup>
Spring tether (hollow shaft)	
Tolerance axial	± 1.5 mm
Tolerance radial	± 0.2 mm
Max. shaft load	axial 40 N / radial 60 N
Vibration resistance (IEC 68-2-6)	100 m/s <sup>2</sup> (10 - 500 Hz)
Shock resistance (IEC 68-2-27)	1000 m/s <sup>2</sup> (6 ms)
Operating temperature	-40...+85 °C
Storage temperature	-40...+85 °C
Material Welle	Stainless steel
Material Gehäuse	Aluminium
Weight approx.	350 g (ST), 400 g (MT)

### TECHNICAL DATA electrical

Supply voltage	DC 10 - 30 V (SELV)
Max. current w/o load ST/MT	220 mA/ 250 mA
EMC	Noise emission according to EN 50081-2
	Immunity to interference according to EN 50082-2
Interface	CAN High-Speed according to ISO/DIS 11898
Protocol	CAN 2.0 A
General design	as per EN 61010-Part 1, protection class III, contamination level 2, overvoltage class II
Resolution singleturn	10 to 14 Bit
Resolution multiturn	12 Bit
Programmable	Direction, limit values
Linearity	± ½ LSB (± 1 LSB for resolution 13, 14, 25, 26 Bit)
Output code	Binary
Updating of values	every millisecond
Basic identifier	set via DIP switches
Baud rate	set via DIP switches
	within a range of 10 through 1000 Kbit/s
Bus termination resistor	set via DIP switches

### TECHNICAL DATA electrical (continued)

Connection	Cable radial or axial Conin radial or axial, cw or ccw Bus cover with: - 3 sealed cable exits - double conin 9 pole radial cw
------------	---

### DIMENSIONAL DRAWINGS

see chapter "Dimensional drawings ACURO industry", starting page 142

### PIN ASSIGNMENT Bus cover with double conin

Conin PIN	Bus cover with	
	Pin insert (IN)	Socket insert (OUT)
1	CAN in +	CAN out +
2	CAN in -	CAN out-
3	CAN GND in	CAN GND out
4	N.C.	N.C.
5	N.C.	N.C.
6	N.C.	N.C.
7	UB in	UB out
8	0 V in	0 V out
9	N.C.	N.C.
screen	screen <sup>1</sup>	screen <sup>1</sup>

<sup>1</sup> screen connected with encoder housing

### PIN ASSIGNMENT with conin or cable

Conin Pin	TPE cable	Cable pairs	Signal
7	yellow	Pair 1	CAN in+
2	green		CAN in -
4	pink	Pair 2	CAN out +
5	grey		CAN out -
3	blue	Pair 3	CAN GND in
11	brown		CAN GND out
12	white		UB in
10	brown		0 V in
screen		screen	screen

### PIN ASSIGNMENT Bus cover with 3 sealed cable exits

Connection block KL 1 (10 pole)	
No.	Signal name
1	UB in (DC 10-30V)
2	0 V in
3	CAN in - (dominant L)
4	CAN in + (dominant H)
5	CAN GND in
6	CAN GND out
7	CAN out + (dominant H)
8	CAN out - (dominant L)
9	0 V out
10	UB out (DC 10-30V)

# Absolute Shaft Encoders

# Type AC 58

## ACURO industry

## CANLayer2

### ACCESSORIES

	Ordering code
Clamping eccentric for synchro flange	0 070 655
Diaphragm coupling (hub 6/6 mm)	3 520 081
Diaphragm coupling (hub 10/10 mm)	3 520 088
Mating connector for connection I (Bus input, 9 pole, bushing, cw)	3 539 294
Mating connector for connection I (Bus output, 9 pole, pins, cw)	3 539 293
Mating connector for connection C; D (12 pole, cw, ccw)	3 539 202
Mating connector for connection G; H (12 pole, cw, ccw)	3 539 229
"Tico" display for connection T	0 731 205
Connection cable bus cover (connection T) to "tico"	3 539 575

### ORDERING INFORMATION

Type	Resolution	Supply voltage	Flange, Protection, Shaft	Interface	Connection
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
<b>AC58</b>	<b>0010</b> 10 Bit ST <b>0012</b> 12 Bit ST <b>0013</b> 13 Bit ST <b>0014</b> 14 Bit ST <b>1212</b> 12 Bit MT+12 Bit ST <b>1213</b> 12 Bit MT+13 Bit ST <b>1214</b> 12 Bit MT+14 Bit ST	<b>E</b> DC 10 - 30 V	<b>S.41</b> Synchro, IP64, 6x10mm <b>S.71</b> Synchro, IP67 <sup>1</sup> , 6x10mm <b>K.42</b> Clamping, IP64, 10x19.5mm <b>K.72</b> Clamping, IP67 <sup>1</sup> , 10x19.5mm <b>K.46</b> Clamping, IP64, 9.52x19.5mm <b>K.76</b> Clamping, IP67 <sup>1</sup> , 9.52x19.5mm <b>F.42</b> Hubshaft with tether, IP64, 10x19.5mm hollow shaft <b>F.47</b> Hubshaft with tether, IP64, 12x19.5mm hollow shaft <b>F.46</b> Hubshaft with tether, IP64, 9.52x19.5mm hollow shaft <b>Q.42</b> Square, IP64, 10x19.5mm <b>Q.72</b> Square, IP67 <sup>1</sup> , 10x19.5mm <b>Q.46</b> Square, IP64, 9.52x19.5mm <b>Q.76</b> Square, IP67 <sup>1</sup> , 9.52x19.5mm	<b>CL</b> CAN L2	<b>A</b> Cable axial <b>B</b> Cable radial <b>C</b> Conin 12 pole axial cw <b>D</b> Conin 12 pole radial cw <b>G</b> Conin 12 pole axial ccw <b>H</b> Conin 12 pole radial ccw <b>I</b> Bus cover with double conin 9 pole radial cw <b>Z</b> Bus cover with 3 sealed cable exits
<sup>1</sup> Protection class IP67 not available in combination with preset key and LED display for flange connector <b>Preferably available versions are printed in bold type.</b>					



### TECHNICAL DATA mechanical

- Programmable: Resolution, Preset, Direction
- Allen Bradley compatible
- Scaleable
- Preset-Funktion
- Diagnostic LED
- Option: display „tico“

Housing diameter	58 mm
Protection class shaft input	IP 64 or IP 67
Protection class housing	Connection Bushaube IP 67
Flange	Synchro flange, clamping flange, hubshaft with tether, square flange
Shaft diameter	Solid shaft 6 mm, 10 mm; hub shaft 10 mm, 12mm
Max. speed	12000 min <sup>-1</sup> (short term), 10000 min <sup>-1</sup> (continuous)
Starting torque	≤ 0.5 Ncm
Moment of inertia	3.8 10 <sup>-6</sup> kgm <sup>2</sup>
Spring tether (hollow shaft)	
Tolerance axial	± 1.5 mm
Tolerance radial	± 0.2 mm
Max. shaft load	axial 40 N / radial 60 N
Vibration resistance (IEC 68-2-6)	100 m/s <sup>2</sup> (10 - 500 Hz)
Shock resistance (IEC 68-2-27)	1000 m/s <sup>2</sup> (6 ms)
Operating temperature	-40...+85 °C
Storage temperature	-40...+85 °C
Material Welle	Stainless steel
Material Gehäuse	Aluminium
Weight approx.	350 g (ST), 400 g (MT)

### TECHNICAL DATA electrical

Supply voltage	DC 10 - 30 V
Max. current w/o load ST/MT	220 mA/ 250 mA
EMC	Interference emission according to EN 50081-2 Interference resistance according to EN 50082-2
Interface	CAN High-Speed according to ISO/DIS 11898 CAN-Specification 2.0 A (11 Bit Identifier)
General design	as per EN 61010-Part 1, protection class III, contamination level 2, overvoltage class II
Protocol	DeviceNet according to Rev. 2.0, programmable encoder
Resolution singleturn	10 to 14 Bit
Resolution multiturn	12 Bit
Programmable	Resolution, Preset, Direction
Linearity	± ½ LSB (± 1 LSB for resolution 13, 14, 25, 26 Bit)
Output code	Binary
Updating of values	every 5 Milliseconds
MAC-ID	set via DIP switches
Baud rate	set via DIP switches to 125, 250, 500 Kbaud
Bus termination resistor	set via DIP switches
Connection	Bus cover with · 2 sealed cable exits · 4 pole M12 f. "tico" display + 2 cable screw connections · M12, 5 pole

### DIMENSIONAL DRAWINGS

see chapter "Dimensional drawings ACURO industry", starting page 142

### RECOMMENDED DATA TRANSFER Lead type A


Shaft resistance	135...165 Ω (3...20MHz)
Operating capacity	< 30pF/m
Loop impedance	< 110 Ω/km
Strand diameter	> 0.64 mm
Strand cross section	> 0.34 mm <sup>2</sup>

### TRANSFER SPEEDS

Segment length	kbit/s
500 m	125
250 m	250
100 m	500

### STARTUP

The encoder can be easily and quickly installed and programmed with the EDS file.

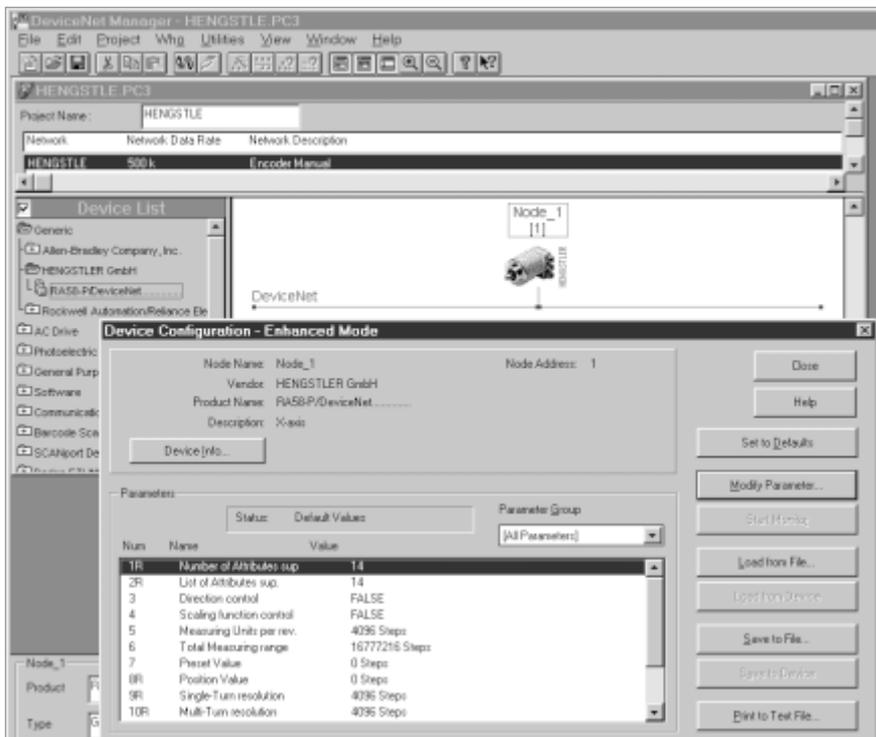

### PIN ASSIGNMENT

Bus cover with 3 sealed cable exits

#### Terminals

No.	Signal name
1	UB in (DC 10 - 30V)
2	0 V in
3	CAN-L
4	CAN-H
5	DRAIN
6	DRAIN
7	CAN-H
8	CAN-L
9	0 V out
10	UB out (DC 10 - 30V)

### PIN ASSIGNMENT

Bus cover with M12, 5 pole

Pin	Connector	Colour
1	UB in (DC 10 - 30V)	white
2	0 V in	blue
3	CAN-L	green/yellow
4	CAN-H	black
5	DRAIN	brown

### ACCESSORIES

	Ordering code
EDS-file as download from our homepage	www.hengstler.de
Technical manual, German	2 565 094 (Web)
Technical manual, English	2 565 256 (Web)
Clamping eccentric for synchro flange	0 070 655
Diaphragm coupling (hub 6/6 mm)	3 520 081
Diaphragm coupling (hub 10/10 mm)	3 520 088
"Tico" display for connection T	0 731 205
Connection cable bus cover (connection T) to "tico"	3 539 575

### ORDERING INFORMATION

Type	Resolution	Supply voltage	Flange, Protection, Shaft	Interface	Connection
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>AC58</b>	<b>0010</b> 10 Bit ST <b>0012</b> 12 Bit ST <b>0013</b> 13 Bit ST <b>0014</b> 14 Bit ST <b>1212</b> 12 Bit MT+12 Bit ST <b>1213</b> 12 Bit MT+13 Bit ST <b>1214</b> 12 Bit MT+14 Bit ST	<b>E</b> DC 10 - 30 V	<b>S.41</b> Synchro, IP64, 6x10mm <b>S.71</b> Synchro, IP67, 6x10mm <b>K.42</b> Clamping, IP64, 10x19.5mm <b>K.72</b> Clamping, IP67, 10x19.5mm <b>K.46</b> Clamping, IP64, 9.52x19.5mm <b>K.76</b> Clamping, IP67, 9.52x19.5mm <b>F.42</b> Hubshaft with tether, IP64, 10x19.5mm hollow shaft <b>F.47</b> Hubshaft with tether, IP64, 12x19.5mm hollow shaft <b>F.46</b> Hubshaft with tether, IP64, 9.52x19.5mm hollow shaft <b>Q.42</b> Square, IP64, 10x19.5mm <b>Q.72</b> Square, IP67, 10x19.5mm <b>Q.46</b> Square, IP64, 9.52x19.5mm <b>Q.76</b> Square, IP67, 9.52x19.5mm	<b>VD</b> DeviceNet	<b>S</b> M12, 5 pole radial <b>T</b> Bus cover with 4 pole M12 for "tico" display + 2 cable screw connections <b>Z</b> 3 cable screw connections

Preferably available versions are printed in bold type.



- Resolution programmable
- Resolution up to 24 Bit
- Preset
- Direction
- Option: display „tico“

### TECHNICAL DATA mechanical

Housing diameter	58 mm
Protection class shaft input	IP 64 or IP 67
Protection class housing	Connection bus cover IP 67 Connection flansch socket IP 64 (IP 67 optional)
Flange	Synchro flange, clamping flange, hubshaft with tether, square flange
Shaft diameter	Solid shaft 6 mm, 10 mm; hub shaft 10 mm, 12mm
Max. speed	12 000 min <sup>-1</sup> (short term), 10 000 min <sup>-1</sup> (continuous)
Starting torque	≤ 0.5 Ncm
Moment of inertia	3.8 10 <sup>-6</sup> kgm <sup>2</sup>
Spring tether (hollow shaft)	
Tolerance axial	± 1.5 mm
Tolerance radial	± 0.2 mm
Max. shaft load	axial 40 N / radial 60 N
Vibration resistance (IEC 68-2-6)	100 m/s <sup>2</sup> (10 - 500 Hz)
Shock resistance (IEC 68-2-27)	1000 m/s <sup>2</sup> (6 ms)
Operating temperature	-40...+85 °C
Storage temperature	-40...+85 °C
Material Welle	Stainless steel
Material Gehäuse	Aluminium
Weight approx.	350 g (ST), 400 g (MT)

### TECHNICAL DATA electrical

Supply voltage	DC 10 - 30 V
Max. current w/o load; recommended external fuse	220 mA/250 mA; T 0.25 A
current with looped through voltage supply; recommended external fuse	max. 4.5 A for bus cover with double conin, max. 2 A for all other connections; T 4.5 A bus cover with with double conin, T 2 A for all other connections
EMC	Interference emission according to EN 50081-2 Interference resistance according to EN 50082-2
Interface	Remote installation bus
Protocol	Interbus with ENCOM Profile K3 (parameterizable), K2
General design	as per EN 61010-Part 1, protection class III, contamination level 2, overvoltage class II
Linearity	± ½ LSB
Output code	32 Bit Binary
Baud rate	500 KBaud
Updating of values	every 600 µs

### TECHNICAL DATA electrical (continued)

Resolution singleturn	10 - 12 Bit
Resolution multiturn	12 Bit
Programmable	Direction, Preset, Offset, Resolution
Connection	Bus cover with: - 2 sealed cable exits - 4 pole M12 for "tico" display + 2 sealed cable exits - double conin 9 pole Cable 12 pole radial and axial


### DIMENSIONAL DRAWINGS

see chapter "Dimensional drawings ACURO industry", starting page 142


### DATA FORMAT INTERBUS K2/K3

	Differential signals (RS 485)				
	ENCOM profile K3, K2, 32 Bit, binary process data				
Data format	Sµpi-address	0	1	2	3
(as per Phoenix)	Byte-No.	3	2	1	0
ID-Code K2	36H (= 54 decimal)				
ID-Code K3	37H (= 55 decimal)				

Host at AC 58

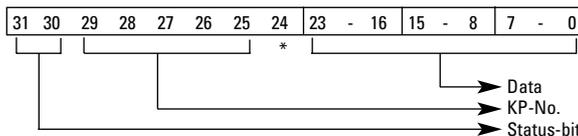

AC 58 at Host

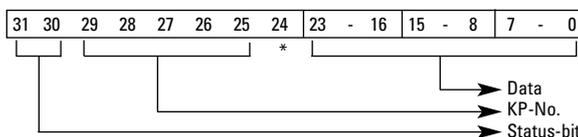

\* Bit 24 not used

### PROGRAMMABLE FUNCTIONS FOR INTERBUS K3

Function (Programming directly via the bus through transfer of configuration parameters)	Preset values (manufacturer's standard settings)	Customer-specific parameters
Code sequence for clockwise (cw) rotation	ascending	
Offset (KP-No. 05)	0	
Preset value (KP-No. 04)	0	
Scaling faktor (KP-No. 08)	1 <sup>1</sup>	

<sup>1</sup> maximum Resolution

### PIN ASSIGNMENT

Cable  
(Standard according to ENCOM  
for remote installation bus)

Plug pin	Signal
1	D02
2	$\overline{D02}$
3	DI 2
4	$\overline{DI2}$
5	D01
6	$\overline{D01}$
7	DI 1
8	$\overline{DI1}$
9	$\overline{RBST}$
10	0 V (supply voltage)
11	GND- signal output <sup>1</sup>
12	DC 10 - 30 V

<sup>1</sup> Due to electrical isolation not identical with 0 V (supply voltage) identisch;  
used by T-manifold to set the RBST input logical on „0“

### PIN ASSIGNMENT

Bus cover with double conin  
(Standard according to ENCOM  
for remote installation bus)

Pin	IN (9 pole pins)	OUT (9 pole socket)
1	D01	D02
2	$\overline{D01}$	$\overline{D02}$
3	DI 1	DI 2
4	$\overline{DI1}$	$\overline{DI2}$
5	GND- signal output <sup>1</sup>	GND- signal output <sup>1</sup>
6	PE <sup>2</sup>	PE <sup>2</sup>
7	DC 10 - 30 V (SELV)	DC 10 - 30 V (SELV)
8	0 V (supply voltage)	0 V (supply voltage)
9	N.C.	$\overline{RBST}$

<sup>1</sup> Due to electrical isolation not identical with 0 V (supply voltage) identisch;  
used by T-manifold to set the RBST input logical on „0“

<sup>2</sup> Functional earthing; connected with the encoder housing

### PIN ASSIGNMENT

Bus cover with 3 sealed cable exits

Connection clamp (12 pole)	
1	UB +
2	GND
3	DI1+
4	DI1-
5	D01+
6	D01-
7	D02+
8	D02-
9	DI2+
10	DI2-
11	[ RBST
12	

### ACCESSORIES

	Ordering code
Technical manual K3, German	2 565 217 (Web)
Clamping eccentric for synchro flange	0 070 655
Diaphragm coupling (hub 6/6 mm)	3 520 081
Diaphragm coupling (hub 10/10 mm)	3 520 088
Mating connector for connection I (Bus input, 9 pole, bushing, cw)	3 539 294
Mating connector for connection I (Bus output, 9 pole, pins, cw)	3 539 293
"Tico" display for connection T	0 731 205
Connection cable bus cover (connection T) to "tico"	3 539 575

### ORDERING INFORMATION

Type	Resolution	Supply voltage	Flange, Protection, Shaft	Interface	Connection
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
<b>AC58</b>	<b>0010</b> 10 Bit ST <b>0012</b> 12 Bit ST <b>1212</b> 12 Bit ST+12 Bit MT	<b>E</b> DC 10 - 30 V	<b>S.41</b> Synchro, IP64, 6x10mm <b>S.71</b> Synchro, IP67 <sup>1</sup> , 6x10mm <b>K.42</b> Clamping, IP64, 10x19.5mm <b>K.72</b> Clamping, IP67 <sup>1</sup> , 10x19.5mm <b>K.46</b> Clamping, IP64, 9.52x19.5mm <b>K.76</b> Clamping, IP67 <sup>1</sup> , 9.52x19.5mm <b>F.42</b> Hubshaft with tether, IP64, 10x19.5mm hollow shaft <b>F.47</b> Hubshaft with tether, IP64, 12x19.5mm hollow shaft <b>F.46</b> Hubshaft with tether, IP64, 9.52x19.5mm hollow shaft <b>Q.42</b> Square, IP64, 10x19.5mm <b>Q.72</b> Square, IP67 <sup>1</sup> , 10x19.5mm <b>Q.46</b> Square, IP64, 9.52x19.5mm <b>Q.76</b> Square, IP67 <sup>1</sup> , 9.52x19.5mm	<b>I3</b> Interbus K3 <b>I2</b> Interbus K2	<b>A-B5-C</b> Cable axial with flange socket at the 1.5m cable with plug <b>B-B5-C</b> Cable radial with flange socket at the 1.5m cable with plug <b>I</b> Bus cover with double conin <b>T</b> Bus cover with 4 pole M12 for "tico" -display + 2 sealed cable exits <b>Z</b> Bus cover with 2 sealed cable exits

<sup>1</sup> Protection class IP67 not available in combination with preset key and LED display for flange connector  
**Preferably available versions are printed in bold type.**



- Compact design: 59 mm length for single or multiturn
- Aids for start up and operation: diagnostic LED, preset key with optical response, status information
- Parameterization: Resolution, code type, direction, output format, warning, alarm
- Parameters can be stored in a non-volatile memory

### TECHNICAL DATA mechanical

Housing diameter	58 mm
Protection class shaft input	IP 64 or IP 67
Protection class housing	IP 64 (IP 67 optional)
Flange	Synchro flange, clamping flange, hubshaft with tether, square flange
Shaft diameter	Solid shaft 6 mm, 10 mm; hub shaft 10 mm, 12mm
Max. speed	12 000 min <sup>-1</sup> (short term), 10 000 min <sup>-1</sup> (continuous)
Starting torque	≤ 0.5 Ncm
Moment of inertia	3.8 · 10 <sup>-6</sup> kgm <sup>2</sup>
Spring tether (hollow shaft)	
Tolerance axial	±1.5 mm
Tolerance radial	±0.2 mm
Max. shaft load	axial 40 N / radial 60 N
Vibration resistance (IEC 68-2-6)	100 m/s <sup>2</sup> (10 - 500 Hz)
Shock resistance (IEC 68-2-27)	1000 m/s <sup>2</sup> (6 ms)
Operating temperature	-40...+100 °C
Storage temperature	-40...+85 °C
Material shaft	Stainless steel
Material housing	Aluminium
Weight approx. ST/MT	260g/ 310g

### TECHNICAL DATA electrical

Supply voltage	DC 10 - 30 V
Max. current w/o load ST/MT	max. 250 mA
Interface	SSI programmable
Lines / drivers	Clock and Data / RS422
Output code	Binary or Gray
Resolution singleturn	10 - 17 Bit
Resolution multiturn	12 Bit
Parameterization	Resolution, code type, direction, output format, warning, alarm
Control input	Direction, Preset 1, Preset 2
Alarm output	Alarm bit
Status LED	Green = ok; red = alarm
Connection	Cable radial or axial Conin radial or axial, ccw

### RECOMMENDED DATA TRANSFER RATE FOR SSI

The max. data transfer rate depends on the cable length.  
For Clock/ Clock and Data/ Data please use twisted pairs. Use shielded cable.

Cable length	Baud rate
< 50 m	< 400 kHz
< 100 m	< 300 kHz
< 200 m	< 200 kHz
< 400 m	< 100 kHz

### SYNCHRONOUS-SERIAL TRANSFER (SSI)

A clock brush is applied at the SSI interface, causing the encoder data to be serially clocked out. With each new clock brush (min. interval 30 ms) new data is readout.

The following main parameters are programmable:


- **Preset:** Software-Preset and via input/pushbutton settable presets (can be inactivated)
- **Offset:** Relative shifting of actual encoder value.
- **Scaling:** The actual value of the encoder is multiplied with the factor < 1.  
Direct entry, increments per measuring distance or per revolution.

- **Direction of rotation:** Can be changed via software or input (can be inactivated)
- **Output formats SSI:** Tree format or standard format (MSB oriented)
- **Output code:** The choices are Gray or binary code, integer or two's complement representation. Selection of significant bit between 16 and 24 Bit.

In addition, programming of max. 7 status bits is possible:

- up to 4 warning positions
- overspeed
- encoder standstill
- parity
- encoder error
- direction of rotation

### PROGRAMMING WITH SSI

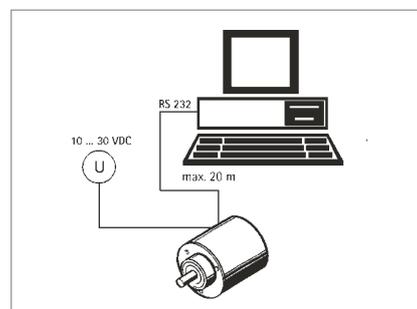

To program the absolute encoder you require a PC, the software WinSSI and the adapter cable.

The encoder is connected to the power supply and the serial interface of your PC with the adapter cable.

Using the menu-assisted programme you can then configure the encoder according to the parameters you require.

### OUTPUT FORMATS SSI

#### MSB-oriented Multiturn

Number of data bits	Clock pulse																								! Status bits 7...1	
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24		
24	M11	M10	M9	M8	M7	M6	M5	M4	M3	M2	M1	M0	S11	S10	S9	S8	S7	S6	S5	S4	S3	S2	S1	S0		
23	M10	M9	M8	M7	M6	M5	M4	M3	M2	M1	M0	S11	S10	S9	S8	S7	S6	S5	S4	S3	S2	S1	S0	0		
22	M9	M8	M7	M6	M5	M4	M3	M2	M1	M0	S11	S10	S9	S8	S7	S6	S5	S4	S3	S2	S1	S0	0	0		
21	M8	M7	M6	M5	M4	M3	M2	M1	M0	S11	S10	S9	S8	S7	S6	S5	S4	S3	S2	S1	S0	0	0	0	0	
20	M7	M6	M5	M4	M3	M2	M1	M0	S11	S10	S9	S8	S7	S6	S5	S4	S3	S2	S1	S0	0	0	0	0	0	
19	M6	M5	M4	M3	M2	M1	M0	S11	S10	S9	S8	S7	S6	S5	S4	S3	S2	S1	S0	0	0	0	0	0	0	
18	M5	M4	M3	M2	M1	M0	S11	S10	S9	S8	S7	S6	S5	S4	S3	S2	S1	S0	0	0	0	0	0	0	0	
17	M4	M3	M2	M1	M0	S11	S10	S9	S8	S7	S6	S5	S4	S3	S2	S1	S0	0	0	0	0	0	0	0	0	
16	M3	M2	M1	M0	S11	S10	S9	S8	S7	S6	S5	S4	S3	S2	S1	S0	0	0	0	0	0	0	0	0	0	
15	M2	M1	M0	S11	S10	S9	S8	S7	S6	S5	S4	S3	S2	S1	S0	0	0	0	0	0	0	0	0	0	0	
14	M1	M0	S11	S10	S9	S8	S7	S6	S5	S4	S3	S2	S1	S0	0	0	0	0	0	0	0	0	0	0	0	
13	M0	S11	S10	S9	S8	S7	S6	S5	S4	S3	S2	S1	S0	0	0	0	0	0	0	0	0	0	0	0	0	
12	S11	S10	S9	S8	S7	S6	S5	S4	S3	S2	S1	S0	0	0	0	0	0	0	0	0	0	0	0	0	0	
11	S10	S9	S8	S7	S6	S5	S4	S3	S2	S1	S0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
10	S9	S8	S7	S6	S5	S4	S3	S2	S1	S0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
9	S8	S7	S6	S5	S4	S3	S2	S1	S0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	

### MSB-oriented

Multiturn (not scaleable)

Clock pulse

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32		
Number of data bits	32	M11	M10	M9	M8	M7	M6	M5	M4	M3	M2	M1	M0	S20	S19	S18	S17	S16	S15	S14	S13	S12	S11	S10	S9	S8	S7	S6	S5	S4	S3	S2	S1	S0
	32	M10	M9	M8	M7	M6	M5	M4	M3	M2	M1	M0	S21	S20	S19	S18	S17	S16	S15	S14	S13	S12	S11	S10	S9	S8	S7	S6	S5	S4	S3	S2	S1	S0
	32	M9	M8	M7	M6	M5	M4	M3	M2	M1	M0	S21	S20	S19	S18	S17	S16	S15	S14	S13	S12	S11	S10	S9	S8	S7	S6	S5	S4	S3	S2	S1	S0	
	31	M8	M7	M6	M5	M4	M3	M2	M1	M0	S21	S20	S19	S18	S17	S16	S15	S14	S13	S12	S11	S10	S9	S8	S7	S6	S5	S4	S3	S2	S1	S0	0	
	30	M7	M6	M5	M4	M3	M2	M1	M0	S21	S20	S19	S18	S17	S16	S15	S14	S13	S12	S11	S10	S9	S8	S7	S6	S5	S4	S3	S2	S1	S0	0	0	
	29	M6	M5	M4	M3	M2	M1	M0	S21	S20	S19	S18	S17	S16	S15	S14	S13	S12	S11	S10	S9	S8	S7	S6	S5	S4	S3	S2	S1	S0	0	0	0	
	28	M5	M4	M3	M2	M1	M0	S21	S20	S19	S18	S17	S16	S15	S14	S13	S12	S11	S10	S9	S8	S7	S6	S5	S4	S3	S2	S1	S0	0	0	0	0	
	27	M4	M3	M2	M1	M0	S21	S20	S19	S18	S17	S16	S15	S14	S13	S12	S11	S10	S9	S8	S7	S6	S5	S4	S3	S2	S1	S0	0	0	0	0	0	
	26	M3	M2	M1	M0	S21	S20	S19	S18	S17	S16	S15	S14	S13	S12	S11	S10	S9	S8	S7	S6	S5	S4	S3	S2	S1	S0	0	0	0	0	0	0	
	25	M2	M1	M0	S21	S20	S19	S18	S17	S16	S15	S14	S13	S12	S11	S10	S9	S8	S7	S6	S5	S4	S3	S2	S1	S0	0	0	0	0	0	0	0	
	24	M1	M0	S21	S20	S19	S18	S17	S16	S15	S14	S13	S12	S11	S10	S9	S8	S7	S6	S5	S4	S3	S2	S1	S0	0	0	0	0	0	0	0	0	
	23	M0	S21	S20	S19	S18	S17	S16	S15	S14	S13	S12	S11	S10	S9	S8	S7	S6	S5	S4	S3	S2	S1	S0	0	0	0	0	0	0	0	0	0	
	22	S21	S20	S19	S18	S17	S16	S15	S14	S13	S12	S11	S10	S9	S8	S7	S6	S5	S4	S3	S2	S1	S0	0	0	0	0	0	0	0	0	0	0	
	21	S20	S19	S18	S17	S16	S15	S14	S13	S12	S11	S10	S9	S8	S7	S6	S5	S4	S3	S2	S1	S0	0	0	0	0	0	0	0	0	0	0	0	
	20	S19	S18	S17	S16	S15	S14	S13	S12	S11	S10	S9	S8	S7	S6	S5	S4	S3	S2	S1	S0	0	0	0	0	0	0	0	0	0	0	0	0	
	19	S18	S17	S16	S15	S14	S13	S12	S11	S10	S9	S8	S7	S6	S5	S4	S3	S2	S1	S0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	18	S17	S16	S15	S14	S13	S12	S11	S10	S9	S8	S7	S6	S5	S4	S3	S2	S1	S0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	17	S16	S15	S14	S13	S12	S11	S10	S9	S8	S7	S6	S5	S4	S3	S2	S1	S0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	16	S15	S14	S13	S12	S11	S10	S9	S8	S7	S6	S5	S4	S3	S2	S1	S0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	15	S14	S13	S12	S11	S10	S9	S8	S7	S6	S5	S4	S3	S2	S1	S0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	14	S13	S12	S11	S10	S9	S8	S7	S6	S5	S4	S3	S2	S1	S0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	13	S12	S11	S10	S9	S8	S7	S6	S5	S4	S3	S2	S1	S0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	12	S11	S10	S9	S8	S7	S6	S5	S4	S3	S2	S1	S0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	11	S10	S9	S8	S7	S6	S5	S4	S3	S2	S1	S0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	10	S9	S8	S7	S6	S5	S4	S3	S2	S1	S0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	9	S8	S7	S6	S5	S4	S3	S2	S1	S0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	

### Tree format

Clock pulse

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	...	
Number of data bits multi-turn	12	M11	M10	M9	M8	M7	M6	M5	M4	M3	M2	M1	M0	S11	S10	S9	S8	S7	S6	S5	S4	S3	S2	S1	S0	0	12
	11	0	M10	M9	M8	M7	M6	M5	M4	M3	M2	M1	M0	S10	S9	S8	S7	S6	S5	S4	S3	S2	S1	S0	0	0	11
	10	0	0	M9	M8	M7	M6	M5	M4	M3	M2	M1	M0	S9	S8	S7	S6	S5	S4	S3	S2	S1	S0	0	0	0	10
	9	0	0	0	M8	M7	M6	M5	M4	M3	M2	M1	M0	S8	S7	S6	S5	S4	S3	S2	S1	S0	0	0	0	0	9
	8	0	0	0	0	M7	M6	M5	M4	M3	M2	M1	M0	S7	S6	S5	S4	S3	S2	S1	S0	0	0	0	0	0	8
	7	0	0	0	0	0	M6	M5	M4	M3	M2	M1	M0	S6	S5	S4	S3	S2	S1	S0	0	0	0	0	0	0	7
	6	0	0	0	0	0	0	M5	M4	M3	M2	M1	M0	S5	S4	S3	S2	S1	S0	0	0	0	0	0	0	0	6
	5	0	0	0	0	0	0	0	M4	M3	M2	M1	M0	S4	S3	S2	S1	S0	0	0	0	0	0	0	0	0	5
	4	0	0	0	0	0	0	0	0	M3	M2	M1	M0	S3	S2	S1	S0	0	0	0	0	0	0	0	0	0	4
	3	0	0	0	0	0	0	0	0	0	M2	M1	M0	S2	S1	S0	0	0	0	0	0	0	0	0	0	0	3
	2	0	0	0	0	0	0	0	0	0	0	M1	M0	S1	S0	0	0	0	0	0	0	0	0	0	0	0	2
	1	0	0	0	0	0	0	0	0	0	0	0	M0	S0	0	0	0	0	0	0	0	0	0	0	0	0	1
	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

→ Status bit 7='0'  
→ Status bits 6...1

**Data multiturn (number of revolutions)** | **Data singleturn (Resolution per revolution)**

### PIN ASSIGNMENT

Cable Colour	Conin Pin	Signal
green	1	Clock
yellow	2	clock
pink	3	Data
grey	4	Data
brown	5	RS 232 TxD
white	6	RS 232 RxD
black	7	0 V-signal output
blue	8	Direction
red	9	Preset 1
violet	10	Preset 2
white <sup>1</sup>	11	DC 10 - 30 V
brown <sup>1</sup>	12	0 V (supply voltage)

<sup>1</sup> bigger cross section 0.5 mm<sup>2</sup>

### ACCESSORIES

	Ordering code
Position indication signo-SSI	see chapter "Accessories" (page 228)
User manual SSI-P, German	2 565 287 (Web)
User manual SSI-P, English	2 565 289 (Web)
Clamping eccentric for synchro flange	0 070 655
Diaphragm coupling (hub 6/6 mm)	3 520 081
Diaphragm coupling (hub 10/10 mm)	3 520 088
Software Win SSI as download from our homepage	www.hengstler.de
Win SSI PC connecting cable, incl. power pack 230 VA, for CONIN 12 pole, CCW (suited for supply voltage E and connection G or H)	1 543 010

### ORDERING INFORMATION

Type	Resolution	Supply voltage	Flange, Protection, Shaft	Interface	Connection
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>AC58</b>	<b>0010</b> 10 Bit ST <b>0012</b> 12 Bit ST <b>0013</b> 13 Bit ST <b>0014</b> 14 Bit ST <b>0017</b> 17 Bit ST <b>1212</b> 12 Bit MT+12 Bit ST <b>1213</b> 12 Bit MT+13 Bit ST <b>1214</b> 12 Bit MT+14 Bit ST <b>1217</b> 12 Bit MT+17 Bit ST *	<b>E</b> DC 10 - 30 V	<b>S.41</b> Synchro, IP64, 6x10mm <b>S.71</b> Synchro, IP67 <sup>1</sup> , 6x10mm <b>K.42</b> Clamping, IP64, 10x19.5mm <b>K.72</b> Clamping, IP67 <sup>1</sup> , 10x19.5mm <b>K.46</b> Clamping, IP64, 9.52x19.5mm <b>K.76</b> Clamping, IP67 <sup>1</sup> , 9.52x19.5mm <b>F.42</b> Hubshaft with tether, IP64, 10x19.5mm hollow shaft <b>F.47</b> Hubshaft with tether, IP64, 12x19.5mm hollow shaft <b>F.46</b> Hubshaft with tether, IP64, 9.52x19.5mm hollow shaft <b>Q.42</b> Square, IP64, 10x19.5mm <b>Q.72</b> Square, IP67 <sup>1</sup> , 10x19.5mm <b>Q.46</b> Square, IP64, 9.52x19.5mm <b>Q.76</b> Square, IP67 <sup>1</sup> , 9.52x19.5mm	<b>SP</b> SSI programmable	<b>A</b> Cable axial <b>B</b> Cable radial <b>G</b> Conin 12 pole axial ccw <b>H</b> Conin 12 pole radial ccw



<sup>1</sup> Protection class IP67 not available in combination with preset key and LED display

\* higher resolution on request

**Preferably available versions are printed in bold type.**

# Absolute Shaft Encoders Type AC 58

## ACURO industry Dimensional drawings

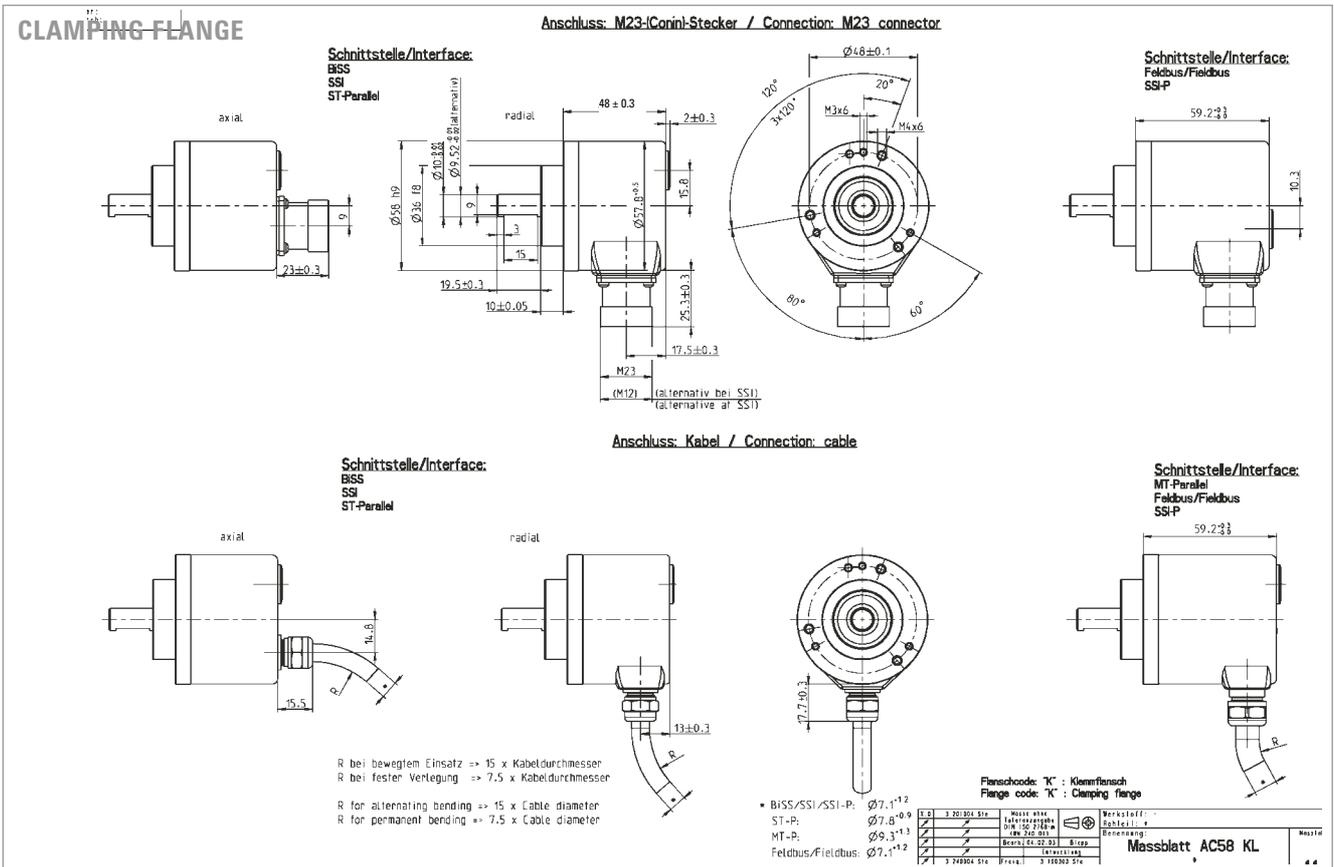
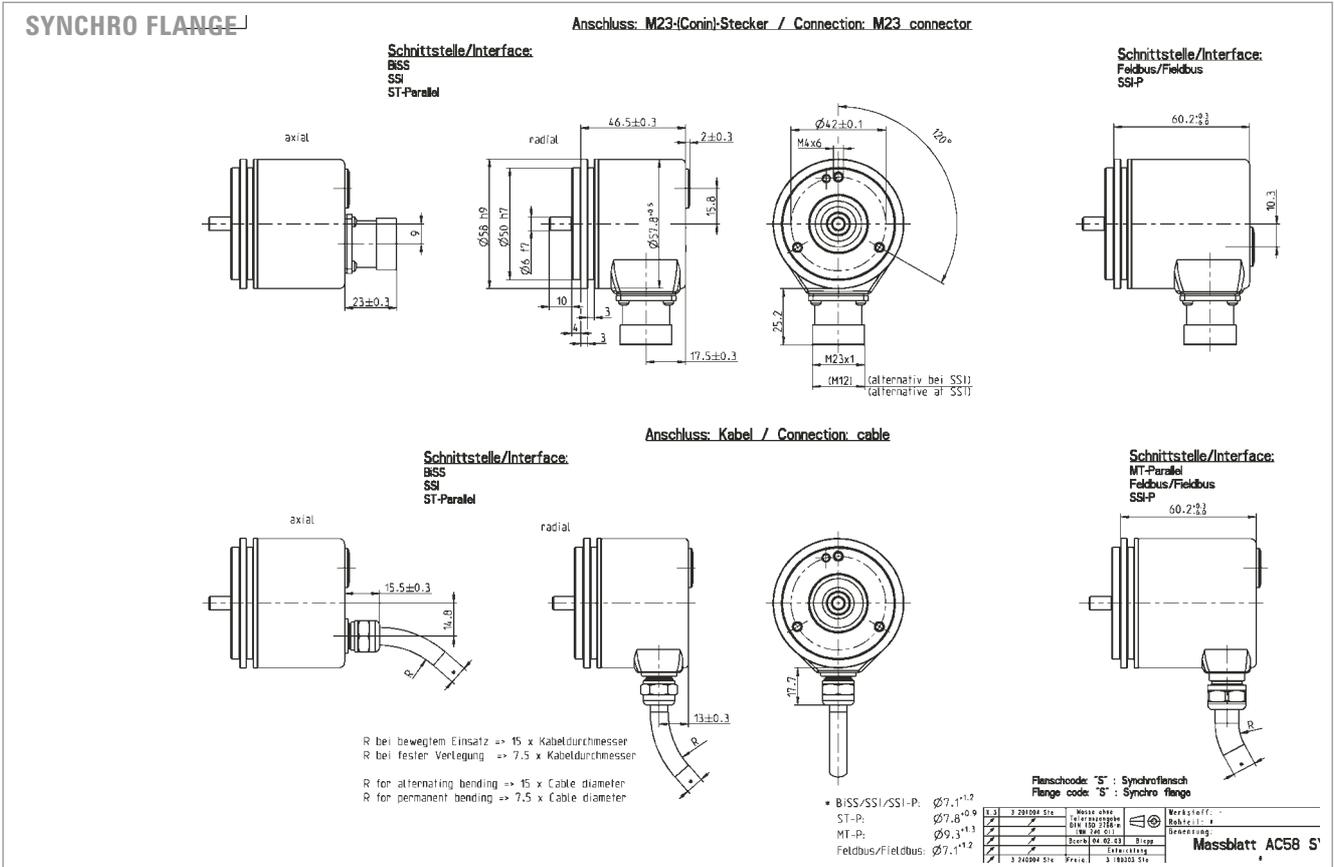


# Absolute Shaft Encoders


## ACURO industry

# Type AC 58


## Dimensional drawings

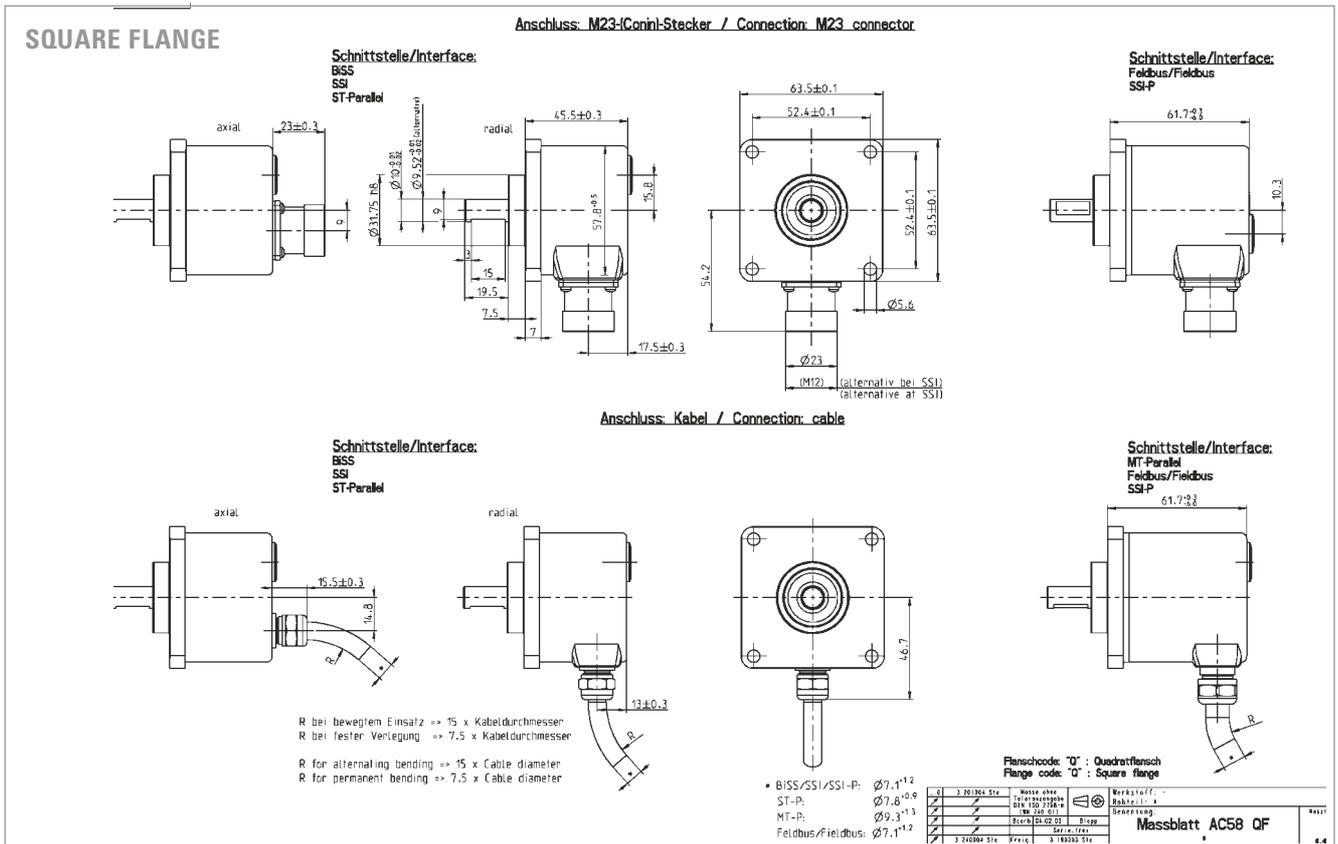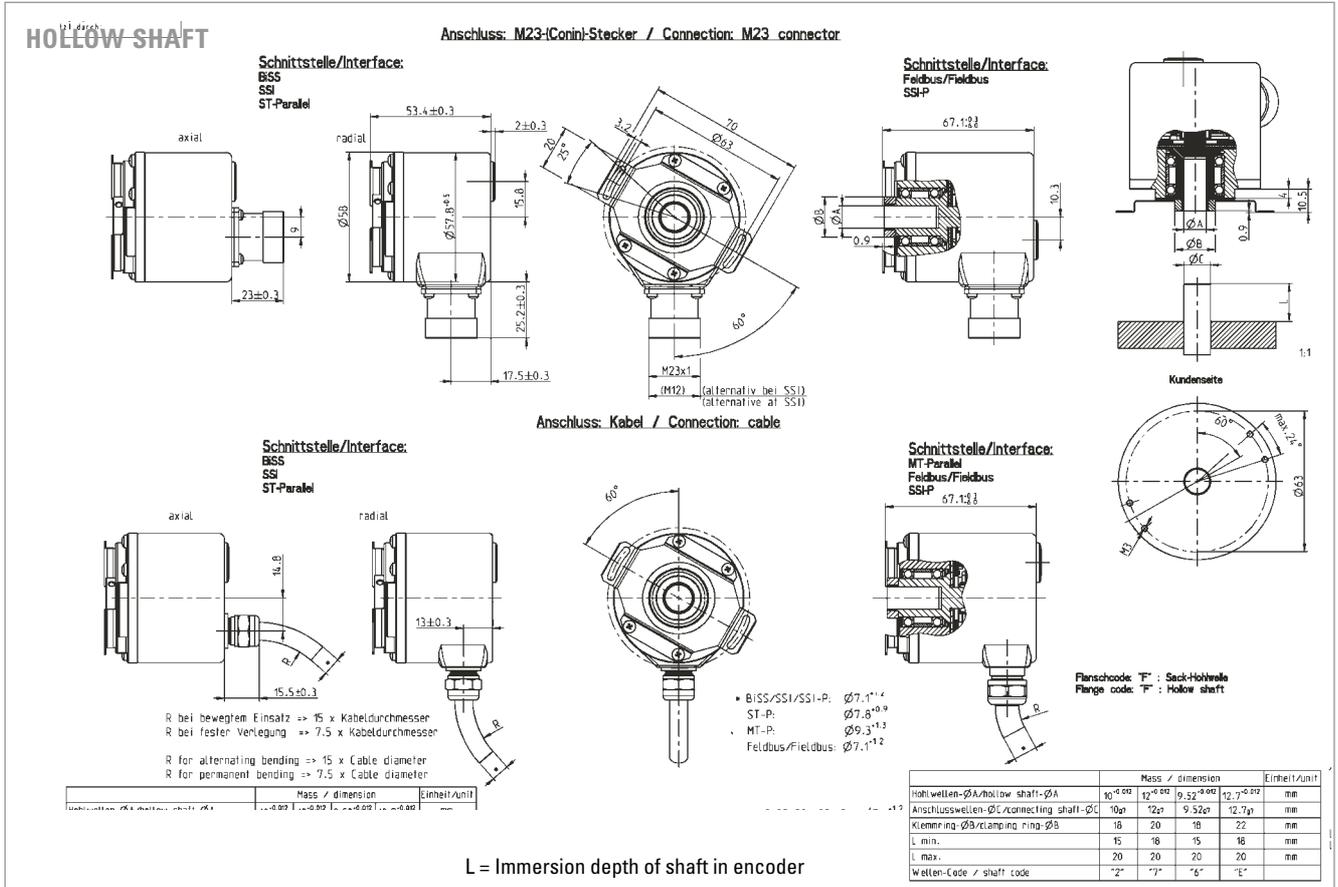


### BUS COVERS

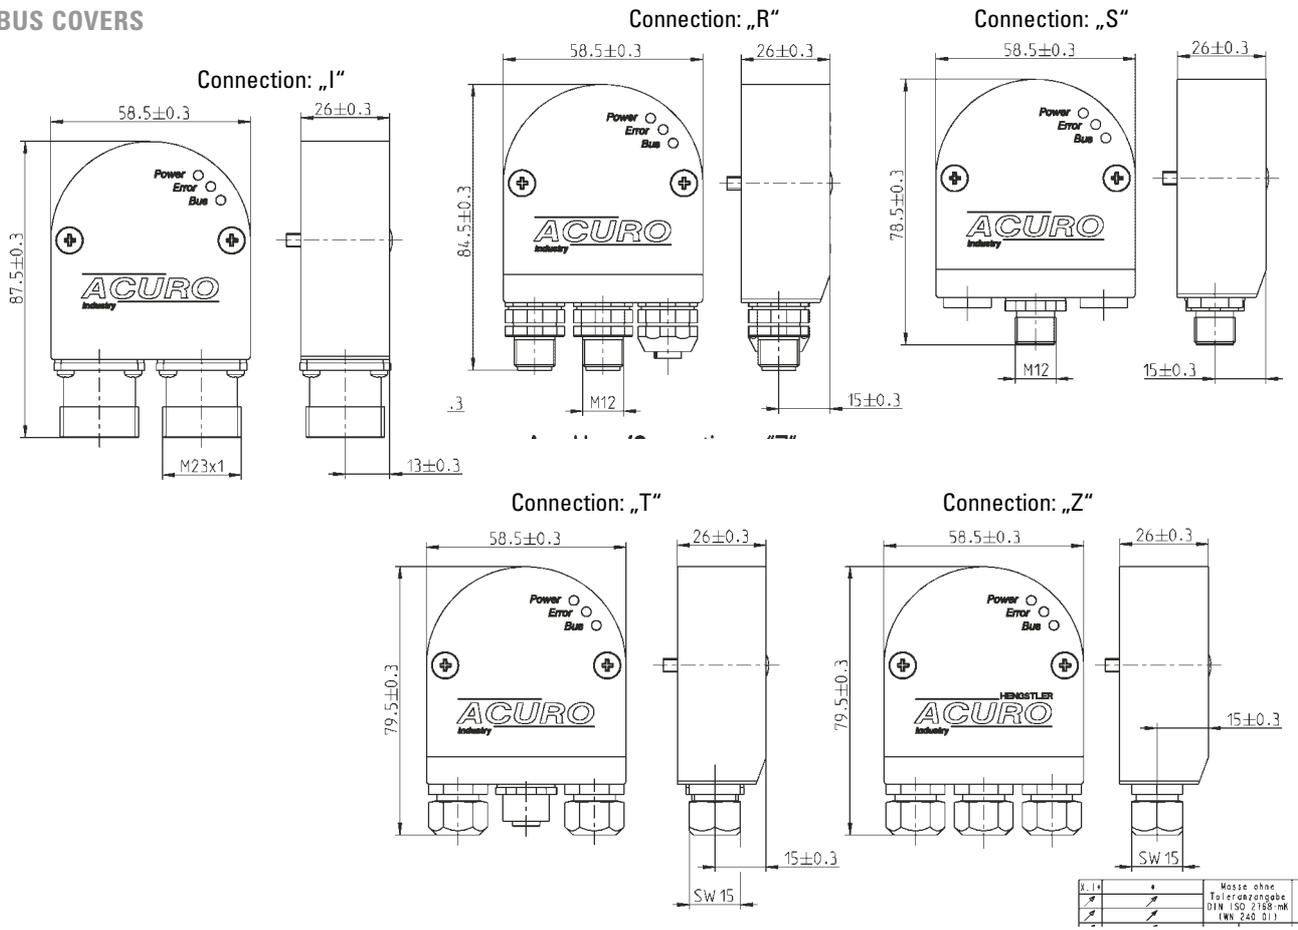


### SYNCHRO FLANGE („S“)

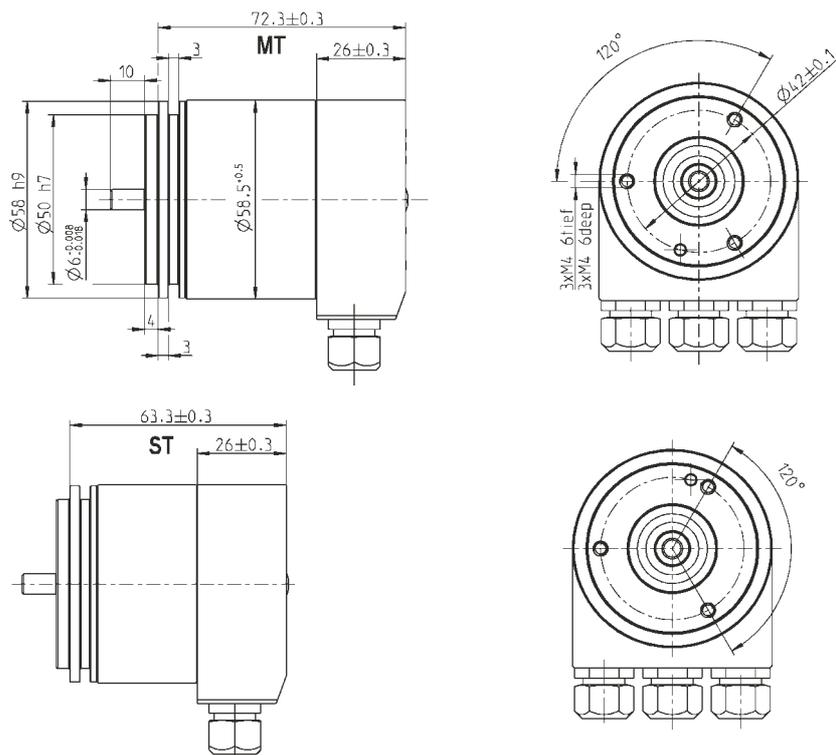

### CLAMPING FLANGE („K“)

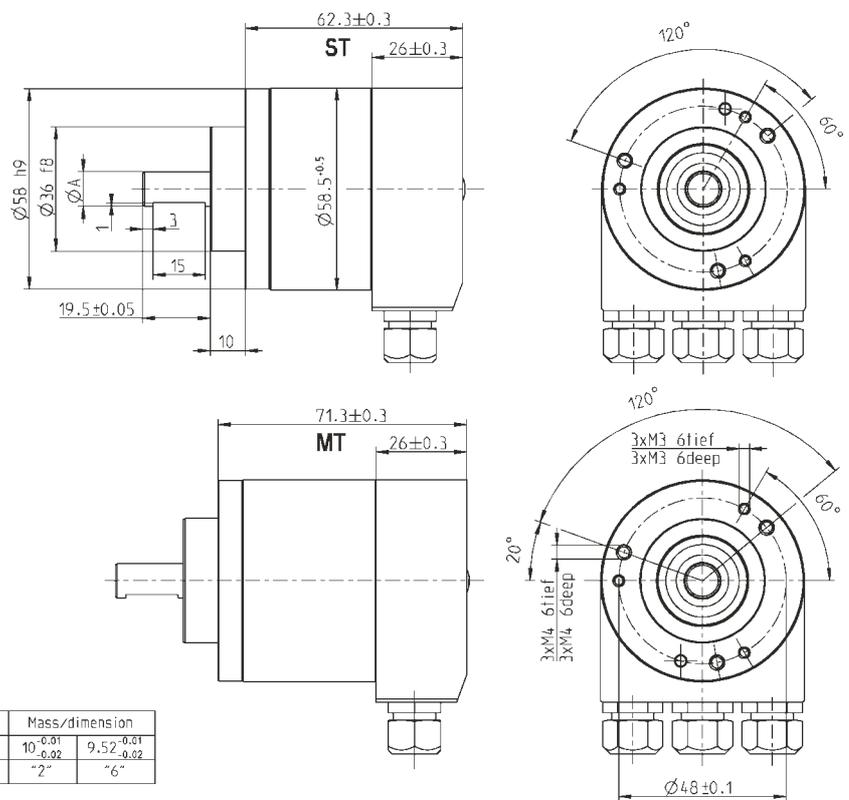

### HOLLOW SHAFT („F“)

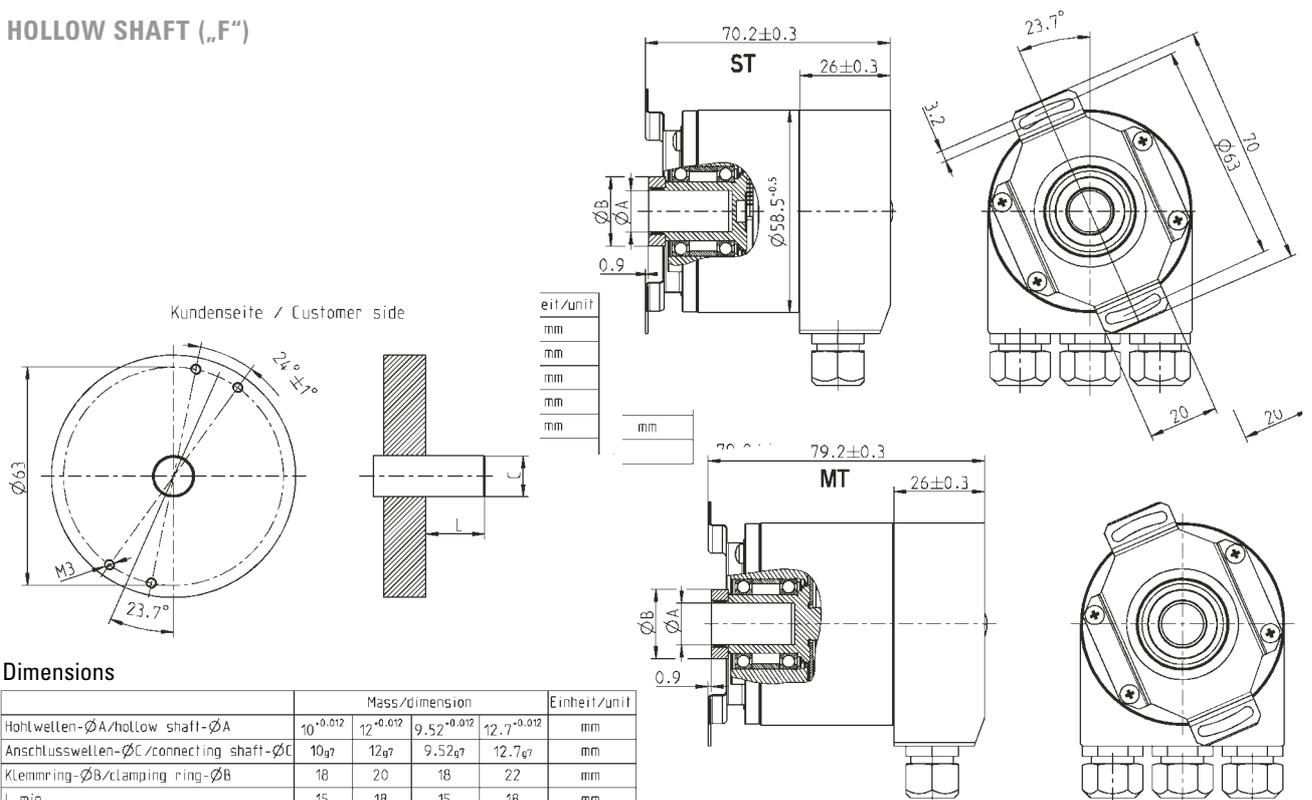


#### Dimensions

	Mass/dimension				Einheit/unit
Hohlwellen-ØA/hollow shaft-ØA	10 <sup>-0.012</sup>	12 <sup>-0.012</sup>	9.52 <sup>-0.012</sup>	12.7 <sup>-0.012</sup>	mm
Anschlusswellen-ØC/connecting shaft-ØC	10 <sub>g7</sub>	12 <sub>g7</sub>	9.52 <sub>g7</sub>	12.7 <sub>g7</sub>	mm
Klemmring-ØB/clamping ring-ØB	18	20	18	22	mm
L min.	15	18	15	18	mm
L max.	20	20	20	20	mm
Wellen-Code / shaft code	"2"	"7"	"6"	"E"	

L = Immersion depth of shaft in encoder

SQUARE FLANGE ("Q")

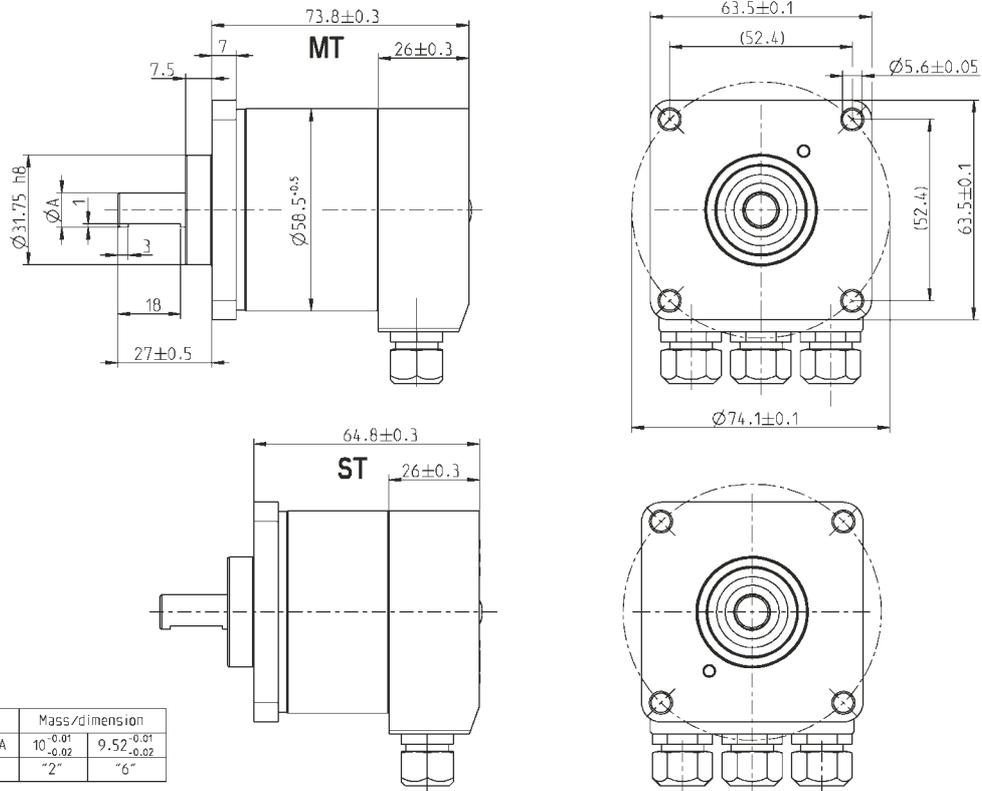

PRELIMINARY



## GENERAL INFORMATION

## TECHNICAL DATA mechanical

# Absolute Shaft Encoders

Type AC 110

## ACURO industry

BiSS / SSI

- Same electrical performance as ACURO industry AC 36 and AC 58 versions
- Robust bearings for long life
- Hollow shaft up to 50 mm
- Absolute singleturn
- Revolution 11-17 Bit
- SSI or BiSS - Interface
- Optional: Sine-Cosine 4096 increments
- DC 5 or 10 - 30 V
- Integrated diagnostic system

### HENGSTLER OPTOASIC Technology

The central Element of the ACURO AC110 is the latest Hengstler OptoAsic technology, which offers the following key benefits.

- Outstanding reliability by reduced number of components and integrated diagnostics systems
- Aging compensation by integrated LED light regulation
- Integrated monitoring of:
  - Pollution
  - Disk damage
  - LED lifetime
  - Temperature

The ACURO AC110 is ideally suited for applications like:



- Gearless drive
- Gearless elevators
- Industrial Machinery

Housing diameter	110 mm
Shaft diameter	up to 50 mm
Protection class housing	IP 50 or IP 64
Protection class shaft	IP 50 or IP 64
Max. speed	IP 50: 3 600 min <sup>-1</sup> IP 64: 1 500 min <sup>-1</sup>
Spring tether (hollow shaft)	
Tolerance axial	± 0.5 mm
Tolerance radial	± 0.05 mm
Vibration resistance (IEC 68-2-6)	100 m/ s <sup>2</sup> (10 - 500 Hz)
Shock resistance (IEC 68-2-27)	1000 m/ s <sup>2</sup> (6 ms)
Operating temperature	-20...+70°C
Storage temperature	-50...+80°C
Material Shaft	Aluminium
Material Housing	Stainless steel
Weight approx.	1000g

### TECHNICAL DATA electrical

Supply voltage	DC 5 V (-5 %/ +10 %) or DC 10-30 V
Max. current w/o load ST/MT	120 mA
Lines / Drives	Clock and Data / RS422
Output code	Binary or Gray
Resolution singleturn	10 - 17 Bit
Incremental signals	Sine - Cosine1 Vss
No. of increments	4 096
3 dB limiting frequency	500 kHz
Absolute accuracy	± 35"
Repeatability	± 7"
Alarm output	alarm bit (SSI), warning bit and alarm bit (BiSS)
Connection	Cable radial

### DIMENSIONAL DRAWINGS

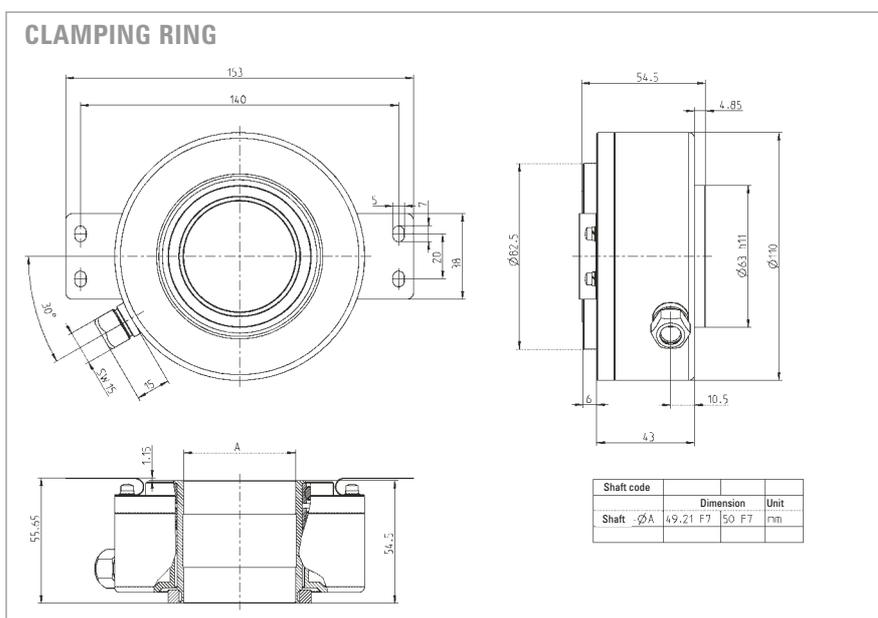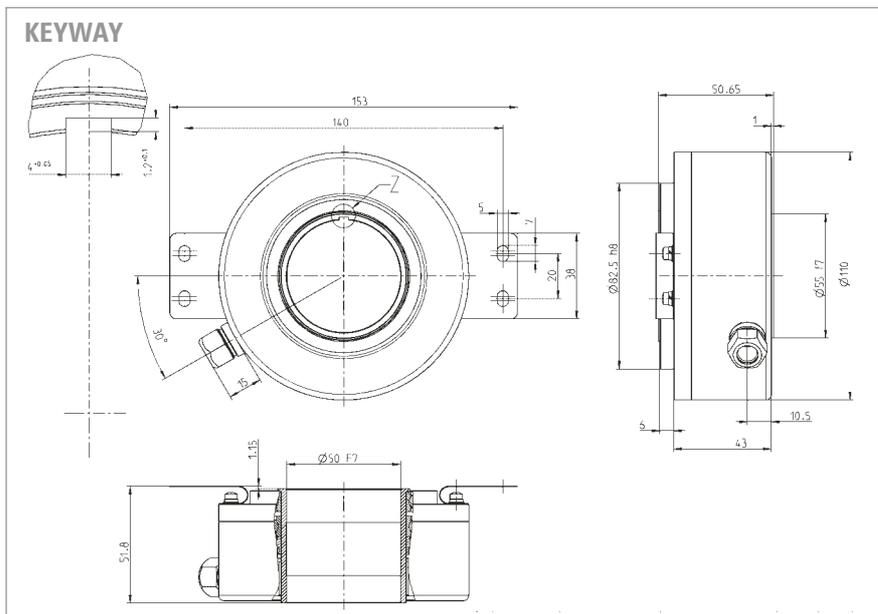

### PIN ASSIGNMENT

Colour cable	Cable connector	Signal
brown <sup>3</sup>	1	0V (supply voltage)
pink	2	Data
yellow	3	Clock
	4	N.C.
blue	5	$\overline{\text{Direction}}^1$
	6	N.C.
	7	N.C.
white <sup>3</sup>	8	DC 5 <sup>3</sup> /10 - 30 V
	9	N.C.
grey	10	$\overline{\text{Data}}$
green	11	$\overline{\text{Clock}}$
black	12	0V-signal output <sup>2</sup>
Screen		Shielded with housing

<sup>1</sup> Direction: + U<sub>B</sub> or unconnected = ascending code values with rotation cw  
0 V = descending code values with rotation cw

<sup>2</sup> Connected with 0 V in the encoder. Use this output to lay Direction on logical "0" if required.

<sup>3</sup> Notice: when supply voltage = DC 5V → max. cable length 10 m

### RECOMMENDED DATA TRANSFER RATE WITH SSI

The max. data transfer rate depends on the cable length.  
For Clock/  $\overline{\text{Clock}}$  and Data/  $\overline{\text{Data}}$  please use twisted pairs. Use shielded cable.

Lead length	Baud rate
< 50 m	< 400 kHz
< 100 m	< 300 kHz
< 200 m	< 200 kHz
< 400 m	< 100 kHz

### ORDERING INFORMATION

Type	Resolution	Supply voltage	Spring tether	Protection class	Mounting /Shaft	Output	Connection
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>AC110</b>	<b>0011</b> 11 Bit ST <b>0012</b> 12 Bit ST <b>0013</b> 13 Bit ST <b>0014</b> 14 Bit ST <sup>1</sup> <b>0017</b> 17 Bit ST	<b>A</b> DC 5 V <sup>2</sup> <b>E</b> DC 10 - 30 V	<b>B</b> with <b>O</b> without	<b>1</b> IP50 <b>4</b> IP64	<b>K50</b> Keyway (4x1.2)/ 50 mm <b>H50</b> Clamping ring/ 50 mm	<b>SB</b> SSI Binary <b>SG</b> SSI Gray <b>BI</b> BiSS	<b>B</b> Cable radial 1.5 m <b>B-DO</b> Cable radial 3 m <b>B-F0</b> Cable radial 5 m <b>B-K0</b> Cable radial 10 m <b>B-D</b> Cable 1.0 m with Conin-Coupling

<sup>1</sup> When resolution > 14 Bit → max. Clock frequency 178 kHz  
<sup>2</sup> Notice: when supply voltage = DC 5V → max. cable length 10 m

# Absolute Shaft Encoders Type AC 59 / 61

## Stainless steel



Version AC 61 with bus terminal box



Version AC 59 with cable outlet

- Compact design
- Protection class IP 67
- High corrosion resistance
- Robust design
- Resolution up to 29 Bit (17 Bit ST, 12 Bit MT)
- Connection with cable or with bus terminal box
- Applications:
  - Packaging machine for food and beverage
  - Ship equipment (e.g. cranes, winches, cable laying ships)
  - Offshore - Applications

The absolute stainless steel encoder are available in the Versions AC 59 and AC 61

- AC 59: drawn stainless steel housing, only together with cable outlet, no access to control elements
- AC 61: massive turned housing, possible with cable or bus terminal box, access to control elements (DIP switch, Reset switch)

### TYPES

The stainless steel encoder is available with following interfaces:

- Single- or multiturn with cable radial/ axial and interfaces SSI, BiSS, Parallel, SSI-P, CANopen, CANlayer2
- Single- or multiturn with bus terminal box and interfaces Profibus, CANopen, CANlayer2, DeviceNet, Interbus

### TECHNICAL DATA mechanical

Flange	Square flange 63.5 x 63.5 mm
Shaft diameter	10 mm
Protection class (EN 60529)	IP 67
Max. Speed	Short term: 10000 min <sup>-1</sup> , continuous: 6000 min <sup>-1</sup>
Torque	< 1 Ncm
Moment or inertia	approx. 20 gcm <sup>2</sup>
Max. shaft load	axial 40 N/ radial 60 N
Vibration proof (IEC 68-2-6)	100 m/ s <sup>2</sup> (10 - 500 Hz)
Shock resistance (IEC 68-2-27)	1000 m/ s <sup>2</sup> (6 ms)
Operating temperature	SSI, BiSS, Parallel, SSI-P: -40...+100°C Profibus, CANopen, CANlayer2, DeviceNet, Interbus: -40...+ 85°C
Storage temperature	-40...+ 85°C
Material Shaft/ Housing	Stainless steel
Weight approx. ST/MT	AC 61: 1088 g, AC 59: 680g

### TECHNICAL DATA electrical

The electrical data and pin assignment see for:


- BiSS/ SSI, page 111
- Parallel, page 116
- Profibus, page 121
- CANopen, page 125
- CANlayer2, page 128
- DeviceNet, page 131
- Interbus, page 134
- SSI-P, page 138



### DIMENSIONAL DRAWINGS (continued)

AC 61

Anschluss: Kabel / Connection: Cable "A"

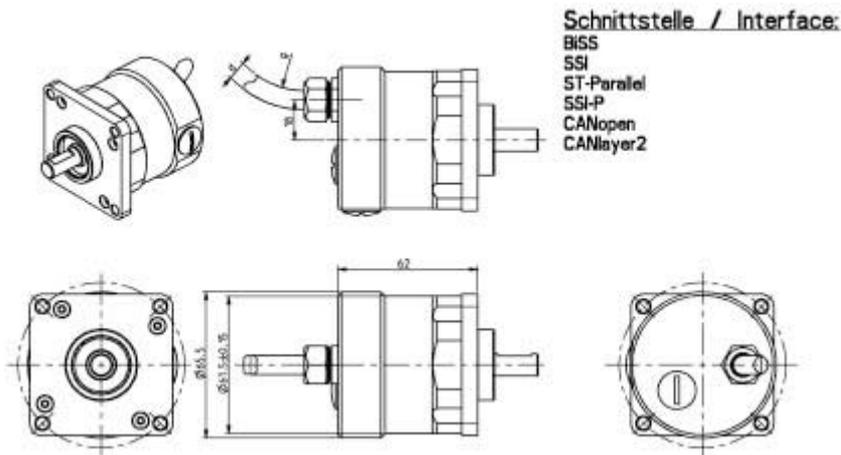

Schnittstelle / Interface:

BISS  
SSI  
ST-Parallel  
SSI-P  
CANopen  
CANlayer2

Kabel-Biegeradius / Cable bending radius:

R bei bewegtem Einsatz  $\Rightarrow 15 \times$  Kabeldurchmesser  
R bei fester Verlegung  $\Rightarrow 7.5 \times$  Kabeldurchmesser


R for alternating bending  $\Rightarrow 15 \times$  Cable diameter  
R for permanent bending  $\Rightarrow 7.5 \times$  Cable diameter

Kabel-Ød / Cable-Ød:

BISS/SSI/SSI-P:  $\varnothing 7.1^{+0.2}$   
ST-P:  $\varnothing 7.8^{+0.8}$   
MT-P:  $\varnothing 9.3^{+0.3}$   
Fieldbus/Fieldbus:  $\varnothing 7.1^{+0.2}$

AC 61

Anschluss: Kabel / Connection: Cable "B"

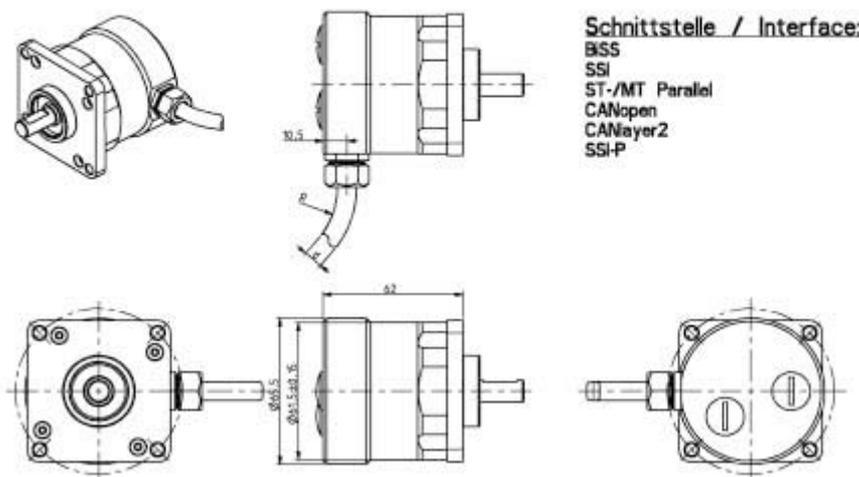

Schnittstelle / Interface:

BISS  
SSI  
ST-/MT Parallel  
CANopen  
CANlayer2  
SSI-P

Kabel-Biegeradius / Cable bending radius:


R bei bewegtem Einsatz  $\Rightarrow 15 \times$  Kabeldurchmesser  
R bei fester Verlegung  $\Rightarrow 7.5 \times$  Kabeldurchmesser

R for alternating bending  $\Rightarrow 15 \times$  Cable diameter  
R for permanent bending  $\Rightarrow 7.5 \times$  Cable diameter

Kabel-Ød / Cable-Ød:

BISS/SSI/SSI-P:  $\varnothing 7.1^{+0.2}$   
ST-P:  $\varnothing 7.8^{+0.8}$   
MT-P:  $\varnothing 9.3^{+0.3}$   
Fieldbus/Fieldbus:  $\varnothing 7.1^{+0.2}$

## DIMENSIONAL DRAWINGS (continued)

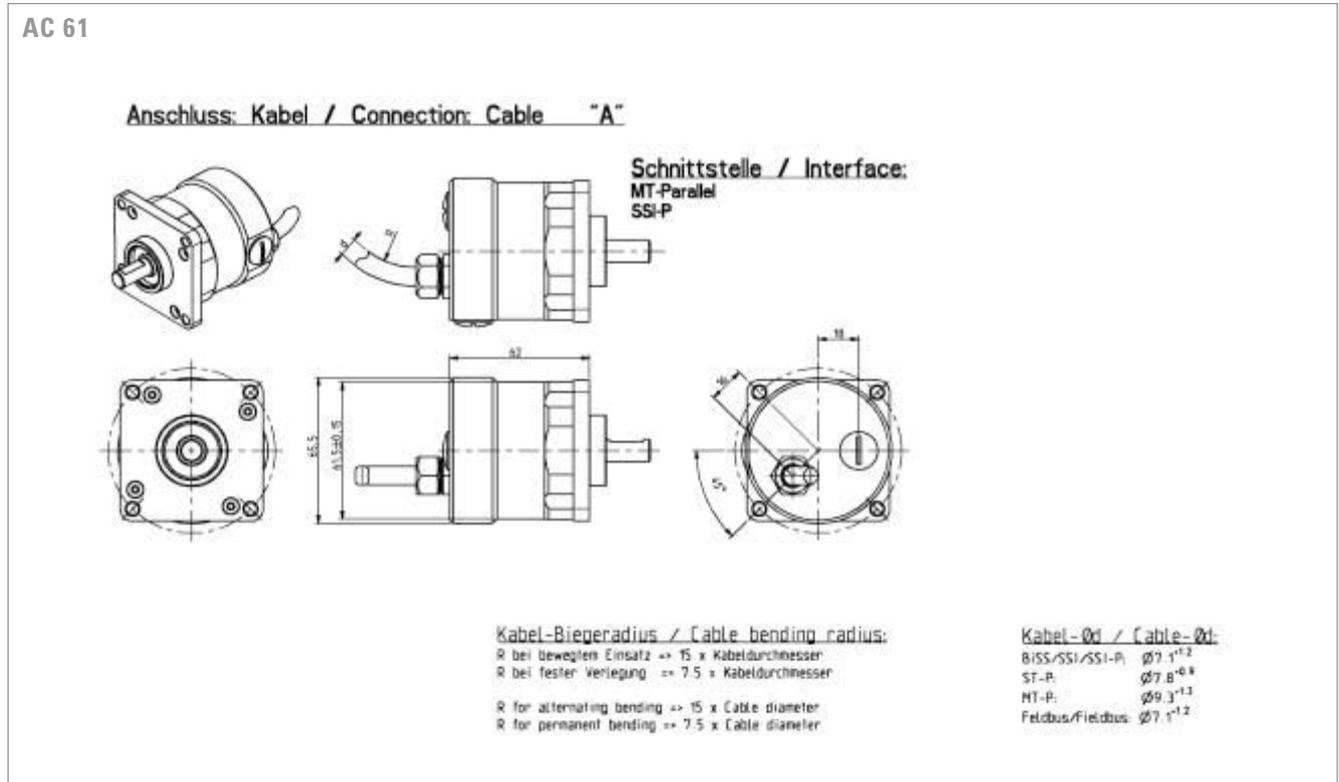

## ACCESSORIES

### Profibus

GSD-file as download from our homepage

[www.hengstler.de](http://www.hengstler.de)

Technical manual German

2 565 090 (or homepage)

Technical manual English

2 565 255 (or homepage)

### CANopen

EDS-file as download from our homepage

[www.hengstler.de](http://www.hengstler.de)

Technical manual

2 565 250 (or homepage)

### DeviceNet

EDS-file as download from our homepage

[www.hengstler.de](http://www.hengstler.de)

Technical manual German

2 565 094 (or homepage)

Technical manual English

2 565 256 (or homepage)

### Interbus

Technical manual K3 German

2 565 217 (or homepage)

### SSI programmable

Technical manual German

2 565 287 (or homepage)

Technical manual English

2 565 289 (or homepage)

Software Win SSI as download from our homepage

[www.hengstler.de](http://www.hengstler.de)

### ORDERING INFORMATION ACURO industry with BiSS

Type	Resolution	Supply voltage	Flange, Protection, Shaft	Output	Connection
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>AC59</b>	<b>0010</b> 10 Bit ST <b>0012</b> 12 Bit ST <b>0013</b> 13 Bit ST <b>0014</b> 14 Bit ST <b>0017</b> 17 Bit ST <b>0360</b> 360 Incr. ST <sup>1</sup> <b>0720</b> 720 Incr. ST <sup>2</sup> <b>1212</b> 12 Bit MT+12 Bit ST <b>1213</b> 12 Bit MT+13 Bit ST <b>1214</b> 12 Bit MT+14 Bit ST <b>1217</b> 12 Bit MT+17 Bit ST	<b>E</b> 10-30 V	<b>Q.72</b> Square flange, IP67, 10x19.5 mm <b>Q.76</b> Square flange, IP67, 9.52x19.5 mm	<b>BI</b> BiSS (Digital) <b>BC</b> BiSS (+SinCos 1Vpp)	<b>A</b> Cable axial 1.5 m <b>A-F0</b> Cable axial 5 m <b>A-K0</b> Cable axial 10 m <b>B</b> Cable radial 1.5 m <b>B-F0</b> Cable radial 5 m <b>B-K0</b> Cable radial 10 m
<sup>1</sup> with Offset 76 (value range 76...435) <sup>2</sup> with Offset 152 (value range 152...871)					

### ORDERING INFORMATION ACURO industry with SSI

Type	Resolution	Supply voltage	Flange, Protection, Shaft	Output	Connection
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>AC59</b>	<b>0010</b> 10 Bit ST <b>0012</b> 12 Bit ST <b>0013</b> 13 Bit ST <b>0014</b> 14 Bit ST <b>0017</b> 17 Bit ST <b>0360</b> 360 Incr. ST <sup>1</sup> <b>0720</b> 720 Incr. ST <sup>2</sup> <b>1212</b> 12 Bit MT+12 Bit ST <b>1213</b> 12 Bit MT+13 Bit ST	<b>E</b> 10-30 V	<b>Q.72</b> Square flange, IP67, 10x19.5 mm <b>Q.76</b> Square flange, IP67, 9.52x19.5 mm	<b>SB</b> SSI Binary <b>SG</b> SSI Gray <b>SC</b> SSI Gray (+SinCos 1Vpp)	<b>A</b> Cable axial 1.5 m <b>A-F0</b> Cable axial 5 m <b>A-K0</b> Cable axial 10 m <b>B</b> Cable radial 1.5 m <b>B-F0</b> Cable radial 5 m <b>B-K0</b> Cable radial 10 m
<sup>1</sup> with Offset 76 (value range 76...435) <sup>2</sup> with Offset 152 (value range 152...871)					

# Absolute Shaft Encoders Type AC 59 / 61

## Stainless steel

### ORDERING INFORMATION ACURO industry with Parallel

Type	Resolution	Supply voltage	Flange, Protection, Shaft	Output	Connection
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>AC59 *</b> <b>AC61</b>	<b>0010</b> 10 Bit ST <b>0012</b> 12 Bit ST <b>0013</b> 13 Bit ST <b>0014</b> 14 Bit ST <b>0017</b> 17 Bit ST <b>0360</b> 360 Incr. ST <sup>1</sup> <b>0720</b> 720 Incr. ST <sup>2</sup> <b>0412</b> 04 Bit MT+12 Bit ST <b>0812</b> 08 Bit MT+12 Bit ST <b>1212</b> 12 Bit MT+12 Bit ST	<b>A</b> 5 V <sup>3</sup> <b>E</b> 10 - 30 V	<b>Q.72</b> Square flange, IP67, 10x19.5 mm <b>Q.76</b> Square flange, IP67, 9.52x19.5 mm	<b>PB</b> Parallel Binary <b>PG</b> Parallel Gray	<b>A</b> Cable axial 1.5 m <b>A-F0</b> Cable axial 5 m <b>A-K0</b> Cable axial 10 m <b>B</b> Cable radial 1.5 m <b>B-F0</b> Cable radial 5 m <b>B-K0</b> Cable radial 10 m
<p>* only with ST  <sup>1</sup> with Offset 76 (value range 76...435)  <sup>2</sup> with Offset 152 (value range 152...871)  <sup>3</sup> <b>Maximum cable length: 1m</b></p>					

### ORDERING INFORMATION ACURO industry with Profibus

Type	Resolution	Supply voltage	Flange, Protection, Shaft	Output	Connection
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>AC61</b>	<b>0010</b> 10 Bit ST <b>0012</b> 12 Bit ST <b>0013</b> 13 Bit ST <b>0014</b> 14 Bit ST <b>1212</b> 12 Bit MT+12 Bit ST <b>1213</b> 12 Bit MT+13 Bit ST <b>1214</b> 12 Bit MT+14 Bit ST	<b>E</b> 10 - 30 V	<b>Q.72</b> Square flange, IP67, 10x19.5 mm <b>Q.76</b> Square flange, IP67, 9.52x19.5 mm	<b>DP</b> Profibus	<b>Z</b> Bus terminal box with 3x screwed cable gland

### ORDERING INFORMATION ACURO industry with CANopen / CANlayer2

Type	Resolution	Supply voltage	Flange, Protection, Shaft	Output	Connection
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>AC61</b>	<b>0010</b> 10 Bit ST <b>0012</b> 12 Bit ST <b>0013</b> 13 Bit ST <b>0014</b> 14 Bit ST <b>1212</b> 12 Bit MT+12 Bit ST <b>1213</b> 12 Bit MT+13 Bit ST <b>1214</b> 12 Bit MT+14 Bit ST	<b>E</b> 10 - 30 V	<b>Q.72</b> Square flange, IP67, 10x19.5 mm <b>Q.76</b> Square flange, IP67, 9.52x19.5 mm	<b>OL</b> CANopen <b>CL</b> CANlayer2	<b>A</b> Cable axial 1.5 m <b>A-F0</b> Cable axial 5 m <b>A-K0</b> Cable axial 10 m <b>B</b> Cable radial 1.5 m <b>B-F0</b> Cable radial 5 m <b>B-K0</b> Cable radial 10 m <b>Z</b> Bus terminal box with 3x screwed cable gland

### ORDERING INFORMATION ACURO industry with DeviceNet

Type	Resolution	Supply voltage	Flange, Protection, Shaft	Output	Connection
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>AC61</b>	<b>0010</b> 10 Bit ST <b>0012</b> 12 Bit ST <b>0013</b> 13 Bit ST <b>0014</b> 14 Bit ST <b>1212</b> 12 Bit MT+12 Bit ST <b>1213</b> 12 Bit MT+13 Bit ST <b>1214</b> 12 Bit MT+14 Bit ST	<b>E</b> 10-30 V	<b>Q.72</b> Square flange, IP67, 10x19.5 mm <b>Q.76</b> Square flange, IP67, 9.52x19.5 mm	<b>VD</b> DeviceNet	<b>Z</b> Bus terminal box with 2x screwed cable gland

### ORDERING INFORMATION ACURO industry with Interbus

Type	Resolution	Supply voltage	Flange, Protection, Shaft	Output	Connection
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>AC61</b>	<b>0010</b> 10 Bit ST <b>0012</b> 12 Bit ST <b>0013</b> 13 Bit ST <b>0014</b> 14 Bit ST <b>1212</b> 12 Bit MT+12 Bit ST <b>1213</b> 12 Bit MT+13 Bit ST <b>1214</b> 12 Bit MT+14 Bit ST	<b>E</b> 10-30 V	<b>Q.72</b> Square flange, IP67, 10x19.5 mm <b>Q.76</b> Square flange, IP67, 9.52x19.5 mm	<b>I3</b> Interbus K3 <b>I2</b> Interbus K2	<b>Z</b> Bus terminal box with 3x screwed cable gland

### ORDERING INFORMATION ACURO industry with SSI programmable

Type	Resolution	Supply voltage	Flange, Protection, Shaft	Output	Connection
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>AC61</b>	<b>0010</b> 10 Bit ST <b>0012</b> 12 Bit ST <b>0013</b> 13 Bit ST <b>0014</b> 14 Bit ST <b>1212</b> 12 Bit MT+12 Bit ST <b>1213</b> 12 Bit MT+13 Bit ST <b>1214</b> 12 Bit MT+14 Bit ST <b>1217</b> 12 Bit MT+17 Bit ST *	<b>E</b> 10-30 V	<b>Q.72</b> Square flange, IP67, 10x19.5 mm <b>Q.76</b> Square flange, IP67, 9.52x19.5 mm	<b>SP</b> SSI programmable	<b>A</b> Cable axial 1.5 m <b>A-F0</b> Cable axial 5 m <b>A-K0</b> Cable axial 10 m <b>B</b> Cable radial 1.5 m <b>B-F0</b> Cable radial 5 m <b>B-K0</b> Cable radial 10 m
* higher resolution on request					



Version AX 70 - Aluminium




Version AX 71 - Stainless steel

- ATEX certification for gas and dust explosion proof
- Same electrical performance as ACURO industry
- Protection class up to IP67
- Diameter only 70 mm
- Robust design
- Also available with stainless steel
- Resolution up to 29 Bit (17 Bit ST, 12 Bit MT)
- Applications:
  - enamelling production line
  - petro chemistry
  - bottling machines
  - mixers
  - silo works, mills
- Interfaces: SSI, SSI programmable, Profibus, CANopen



### EX-CLASSIFICATION

The absolute shaft encoder line ACURO is available in explosion proof design with explosion proof enclosure "d" under AX 70 and AX 71 (stainless steel). The PTB has assured with the Declaration of Conformity that the AX 70 / 71 meets the requirements of safety and health according to EN 50014 and EN 50018. Therefore it is approved in explosive areas, code „Ex II 2 G/D E Ex d II C T4/T6 IP65/ IP66 135°C resp. 85°C“. For applications under tough environmental conditions and food industry the stainless steel version AX 71 is available.

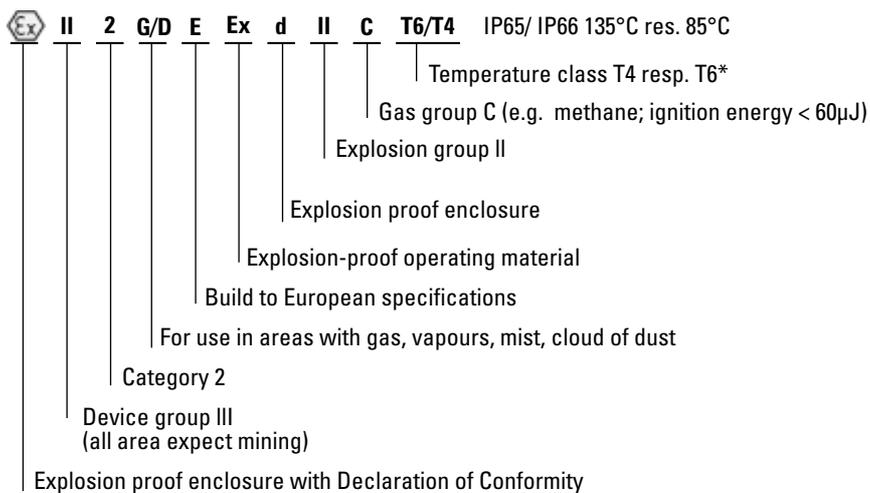

T6 = Highest permissible surface temperature +85°C (max. speed = 6000 U/min<sup>-1</sup>)  
 T4 = Highest permissible surface temperature +130°C(max. speed = 10000 U/min<sup>-1</sup>)

# Absolute Shaft Encoders

# Type AX 70 / 71

## Explosion proof

### TECHNICAL DATA mechanical (for all interfaces)

	Temperature class T4	Temperature class T6
Housing diameter	70 mm	70 mm
Shaft diameter	10 mm	10 mm
Protection class housing	IP67 or IP65	IP67
Protection class shaft	IP67 or IP64	IP67
Max. speed	10000 min <sup>-1</sup>	6000 min <sup>-1</sup>
Torque	≤ 1 Ncm	≤ 1 Ncm
Moment of inertia	approx. 20 gcm <sup>2</sup>	approx. 20 gcm <sup>2</sup>
Max. shaft load	axial 40 N/ radial 100 N	axial 40 N/ radial 100 N
Vibration resistance (IEC 68-2-6)	100 m/ s <sup>2</sup> (10 - 500 Hz)	100 m/ s <sup>2</sup> (10 - 500 Hz)
Shock resistance (IEC 68-2-27)	1000 m/ s <sup>2</sup> (6 ms)	1000 m/ s <sup>2</sup> (6 ms)
Operating temperature	-20 ...+60°C	-10 ...+40°C
Storage temperature	-25...+80°C	-25...+80°C
Material shaft / housing	Aluminium(AX70) Stainless steel(AX71)	Aluminium(AX70) Stainless steel(AX71)
Weight approx. ST/MT	1 000 g (AX 70) 1 900 g (AX 71)	1 000 g (AX 70) 1 900 g (AX 71)

### TECHNICAL DATA ELECTRICAL PROFIBUS, CANOPEN

	Profibus	CANopen
Supply voltage	DC 10-30 V	DC 10-30 V
Max. current w/o load ST/MT	220 mA/ 250 mA	max. 250 mA
Profile/ Protocol	Profibus DP with encoder profile class C2 (programmable)	CANopen according DS 301 with encoder profile DSP 406
Output code	binary	binary
Resolution singleturn	10 - 14 Bit	10 - 14 Bit
Resolution multiturn		12 Bit
Baud rate	is automatically set within a range of 9.6 Kbit/s through 12Mbit/s	set via DIP-switches
Bus terminating resistor	external mounting	external mounting
Device address	set via Bus	-
Node ID	-	set via Bus
Integrated special functions	Speed, acceleration, operating time	Speed, acceleration, round axis, limit values
Programmable	Resolution, Preset, Direction	Resolution, Preset, Limit value, Direction
Connection	Cable axial	Cable axial

### PIN ASSIGNMENT Profibus, CANopen

Color	Profibus	CANopen
yellow	B in	CAN in+
green	A in	CAN in -
pink	B out	CAN out+
grey	A out	CAN out -
blue	GND1 (M5V <sup>1</sup> )	CAN GND in
brown	VCC1 (P5V <sup>1</sup> )	CAN GND out
white 0.5 mm	DC 10 ... 30 V	UB in
brown 0.5 mm	0 V	0 V in
Screen	Screen connected to encoder housing	

<sup>1</sup> used for power supply for an external bus termination resistor

# Absolute Shaft Encoders Type AX 70 / 71

## Explosion proof

### TECHNICAL DATA ELECTRICAL SSI, SSI PROGRAMMABLE

	<b>SSI</b>	<b>SSI programmable</b>
Supply voltage	DC 10-30 V	DC 10-30 V
Max. current w/o load ST/MT	220 mA/ 250 mA	max. 250 mA
Lines / Drivers	clock and data RS422	clock and data RS422
Output code	binary or gray	binary or gray
Resolution singleturn	10 - 17 Bit	9 - 22 Bit
Resolution multiturn	12 Bit	12 Bit
Programmable (with ACURO soft + appropriate hardware)	code type, direction, warning, alarm	-
Programmable (with WIN SSI)	-	code type, direction, output code, warning, alarm
Control input	<u>Direction</u>	Direction, Preset 1, Preset 2
Alarm output	Alarm bit	Alarm bit
Connection	Cable axial	Cable axial

### PIN ASSIGNMENT SSI, SSI programmable

<b>Color</b>	<b>No.</b>	<b>SSI</b>	<b>SSI programmable</b>
white	6	-	RS232 RxD
brown	5	-	RS232 TxD
green	10	<u>Clock</u>	<u>Clock</u>
yellow	9	Clock	Clock
grey	8	<u>Data</u>	<u>Data</u>
pink	7	Data	Data
blue	3	<u>Direction</u>	Direction
black	4	0 V signal output	0 V signal output
red	1	-	Preset 1
violet	2	-	Preset 2
brown 0.5 mm	11	0 V supply voltage	0 V supply voltage
white 0.5 mm	12	10 ... 30 V	10 ... 30 V
Screen		Screen connected to the housing	


### RECOMMENDED DATA TRANSFER RATE WITH SSI

The max. data transfer rate depends on the cable length.  
For Clock/ Clock and Data/ Data please use twisted pairs. Use shielded cable.


Lead length	Baud rate
< 50 m	< 400 kHz
< 100 m	< 300 kHz
< 200 m	< 200 kHz
< 400 m	< 100 kHz

### DIMENSIONAL DRAWINGS

SSI

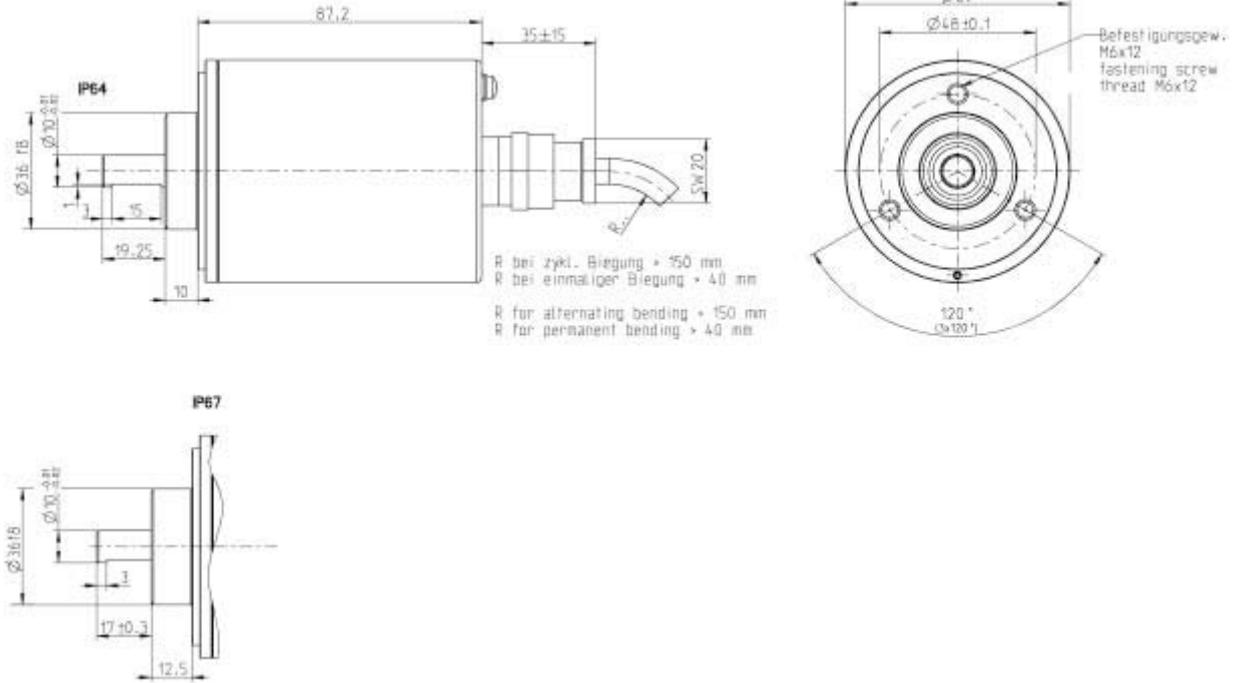

SSI-P, Profibus,  
CANopen

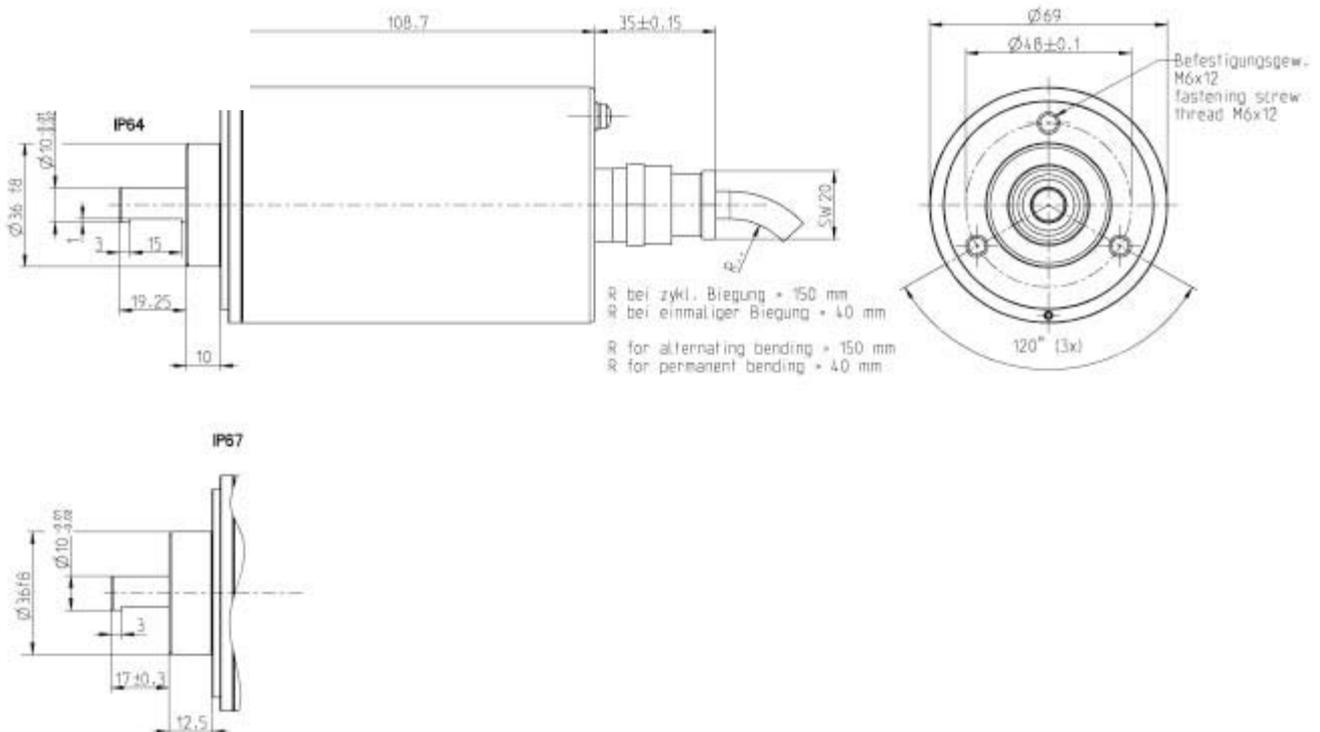

# Absolute Shaft Encoders Type AX 70 / 71

## Explosion proof

### ACCESSORIES

<b>SSI</b>	
Software ACURO soft	on request
<b>SSI programmable</b>	
Technical Manual German	2 565 287 (or homepage)
Technical Manual English	2 565 289 (or homepage)
Software Win SSI	on request
<b>Profibus</b>	
GSD-file as download from our homepage	www.hengstler.de
Technical Manual German	2 565 090 (or homepage)
Technical Manual English	2 565 255 (or homepage)
<b>CANopen</b>	
EDS-file as download from our homepage	www.hengstler.de
Technical Manual German	2 565 250 (or homepage)

### ORDERING INFORMATION ACURO industry with SSI

Type	Resolution	Supply voltage	Flange, Protection, Shaft	Output	Connection
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>AX70-</b> Aluminum	<b>0010</b> 10 Bit ST <b>0012</b> 12 Bit ST	<b>E</b> 10 - 30 V	<b>K.42</b> Clamping flange, IP64, 10x19.5 mm <b>K.72*</b> Clamping flange, IP67, 10x19.5 mm	<b>SB</b> SSI Binary <b>SG</b> SSI Gray	<b>A-F0</b> Cable axial 5 m <b>A-K0</b> Cable axial 10 m
<b>AX71-</b> Stainless steel	<b>0013</b> 13 Bit ST <b>0014</b> 14 Bit ST ** <b>0017</b> 17 Bit ST <b>0360</b> 360 Incr. ST <sup>1</sup> <b>0720</b> 720 Incr. ST <sup>2</sup> <b>1212</b> 12 Bit MT+12 Bit ST <b>1213</b> 12 Bit MT+13 Bit ST higher resolutions on request				
<p>* only with temperature class 4; IP67 is necessary for use in areas with clouds of dust  ** When resolution &gt; 14 Bit → max. clock frequency 178 kHz  <sup>1</sup> with Offset 76 (value range 76...435)  <sup>2</sup> with Offset 152 (value range 152...871)</p>					

### ORDERING INFORMATION

ACURO industry with SSI programmable

Type	Resolution	Supply voltage	Flange, Protection, Shaft	Output	Connection
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>AX70-</b> Aluminum <b>AX71-</b> Stainless steel	<b>0010</b> 10 Bit ST <b>0012</b> 12 Bit ST <b>0013</b> 13 Bit ST <b>0014</b> 14 Bit ST <b>0017</b> 17 Bit ST <b>1212</b> 12 Bit MT+12 Bit ST <b>1213</b> 12 Bit MT+13 Bit ST <b>1214</b> 12 Bit MT+14 Bit ST <b>1217</b> 12 Bit MT+17 Bit ST higher resolutions on request	E 10-30 V	<b>K.42</b> Clamping flange, IP64,10x19.5 mm <b>K.72*</b> Clamping flange, IP67, 10x19.5 mm	<b>SP</b> SSI programmable	<b>A-F0</b> Cable axial 5 m <b>A-K0</b> Cable axial 10 m

\* only with temperature class 4; IP67 is necessary for use in areas with clouds of dust

### ORDERING INFORMATION

ACURO industry with SSI Profibus

Type	Resolution	Supply voltage	Flange, Protection, Shaft	Output	Connection
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>AX70-</b> Aluminum <b>AX71-</b> Stainless steel	<b>0010</b> 10 Bit ST <b>0012</b> 12 Bit ST <b>0013</b> 13 Bit ST <b>0014</b> 14 Bit ST <b>1212</b> 12 Bit MT+12 Bit ST <b>1213</b> 12 Bit MT+13 Bit ST <b>1214</b> 12 Bit MT+14 Bit ST	E 10-30 V	<b>K.42</b> Clamping flange, IP64,10x19.5 mm <b>K.72*</b> Clamping flange, IP67, 10x19.5 mm	<b>DP</b> Profibus	<b>A-F0</b> Cable axial 5 m <b>A-K0</b> Cable axial 10 m

\* only with temperature class 4; IP67 is necessary for use in areas with clouds of dust

### ORDERING INFORMATION

ACURO industry with CANopen

Type	Resolution	Supply voltage	Flange, Protection, Shaft	Output	Connection
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>AX70-</b> Aluminum <b>AX71-</b> Stainless steel	<b>0010</b> 10 Bit ST <b>0012</b> 12 Bit ST <b>0013</b> 13 Bit ST <b>0014</b> 14 Bit ST <b>1212</b> 12 Bit MT+12 Bit ST <b>1213</b> 12 Bit MT+13 Bit ST <b>1214</b> 12 Bit MT+14 Bit ST	E 10-30 V	<b>K.42</b> Clamping flange, IP64,10x19.5 mm <b>K.72*</b> Clamping flange, IP67, 10x19.5 mm	<b>OL</b> CANopen	<b>A-F0</b> Cable axial 5 m <b>A-K0</b> Cable axial 10 m

\* only with temperature class 4; IP67 is necessary for use in areas with clouds of dust

## Motor Feedback Systems

Hengstler offers Motor Feedback systems in all performance classes and with the most commonly used interfaces



From modular miniature incremental encoders for **DC and Stepper Motors** in 22 mm diameter up to the absolute AC110 with 50mm hollow shaft Hengstler provides a complete range of Motor Feedback systems.

**For asynchronous motors** and elevators the offering comprises incremental and absolute hollow shaft encoders in singleturn and multiturn versions. Trend-setting is the Incremental OptoASIC with diagnosis system and integrated interpolation electronic which is for the first time used in RI80-E. This enables resolutions of up to 200 000 pulses for good synchronism of electric machines running at low revs.

**For AC Servo Motors** there is an extensive range of feedback products available: Brushless resolvers size 10, 15 and 21 uniquely robust and low priced, incremental comcoders for direct block commutation of BLDC motors in low cost modular version or with integrated bearings and resolutions up to 10 000 pulses per revolution.

Your application requires highest precision and dynamics? Than you are on the right track with the Sine-wave encoder S21 and the absolute Acuro-Drive encoder. Latest OptoASIC technology and a true geared multiturn provides obvious advantages regarding performance and reliability. Hengstler offers the Acuro-Drives series with the open, highspeed, digital interface BiSS. With the open source BiSS interface the proprietary lock-in situation with absolute motorfeedback systems is broken up with the benefit of an increasing range of suppliers.

### **One Size fits all:**

No matter whether your servo application requires resolvers, incremental comcoders or absolute Multiturn encoders - the complete range in size 15 with resolver compatible mounting is available from Hengstler. The benefit of this is, that the B-side of the motor can be resolver style and doesn't need to be customized, depending on the feedback. The Feedback type can be selected according to customer demands or required resolution and technology. This helps reducing variation of parts and stock and enables improved delivery times.

## Motor Feedback Systems - Kit Encoders for Miniature DC and Stepper Motors



Type	E 9	M 9	M 14
<b>Special features</b>	<ul style="list-style-type: none"> <li>■ ideal for position and speed sensing in small machines and actuators</li> <li>■ low power standby mode is ideal for battery powered devices</li> <li>■ 200 kHz operating frequency</li> <li>■ resolution to 512 lines/rev</li> </ul>	<ul style="list-style-type: none"> <li>■ ideal for position and speed sensing in small machines and actuators</li> <li>■ 200 kHz operating frequency</li> <li>■ resolution to 512 lines/rev</li> </ul>	<ul style="list-style-type: none"> <li>■ ideal economical feedback device for servo and stepper motors</li> <li>■ short axial length and compact 1.5 inch diameter</li> <li>■ easy "snap-on" installation</li> <li>■ high resolution to 1024 lines/rev and 200 kHz bandwidth</li> <li>■ drop-in replacement for HP 5540</li> </ul>
<b>Number of pulses</b>	100 ... 512	100 ... 512	200 ... 1 024
<b>Commutation</b>	None	None	None
<b>Technical Data - mechanical</b>			
Shaft diameter	Hollow shaft Ø 1.5 ... 4.0 mm	Hollow shaft Ø 1.5 ... 4.0 mm	Hollow shaft Ø 3.0 ... 8.0 mm
Max. speed	12 000 min <sup>-1</sup>	12 000 min <sup>-1</sup>	12 000 min <sup>-1</sup>
Protection class housing/bearing	---	---	---
Operating temperature	-40 ... + 100 °C	-40 ... + 100 °C	-40 ... + 100 °C
Diameter	22.0 mm	22.0 mm	38.0 mm
Mounting depth	20.0 mm	14.8 mm	17.2 mm
<b>Technical Data - electrical</b>			
Output	TTL	TTL	TTL
Supply voltage (SELV)	DC 5 V ±10 %	DC 5 V ±10 %	DC 5 V ±10 %
Max. current w/o load	10 mA, typ. Standby current: max. 50 µA	10 mA, typ.	10 mA, typ.
Max. pulse frequency	200 kHz	200 kHz	200 kHz
Max. output load	3 mA (25°C), 2 mA (100°C)	3 mA (25°C), 2 mA (100°C)	6mA (25°C) 4 mA (100°C)
Pulse shape	Square wave	Square wave	Square wave
Phasing	90°±18° electrical	90°±18° electrical	90°±18° electrical
Symmetry	180°±18° electrical	180°±18° electrical	180°±18° electrical
<b>Page</b>	175	178	181

## Motor Feedback Systems - Hollow shaft Encoders for Asynchronous & DC Motors



Type	RI 36-H	RI 58-D	RI 58TD
<b>Special features</b>	<ul style="list-style-type: none"> <li>■ miniature industry encoder for high numbers of pulses</li> <li>■ short mounting depth</li> <li>■ easy mounting procedure</li> <li>■ applications, e.g. motors, machine tools, packaging machines, robots, automated SMD equipment</li> </ul>	<ul style="list-style-type: none"> <li>■ direct mounting without coupling</li> <li>■ flexible hollow shaft concept up to 14 mm</li> <li>■ through hollow shaft or as end shaft (blind shaft)</li> <li>■ easy mounting procedure with clamping flange or fastening thread</li> <li>■ short mounting depth of 33 mm</li> <li>■ operating temperature up to 80 °C</li> <li>■ Fixing of the flange with a stator coupling or cylindrical pin</li> <li>■ applications, e.g. positioning drives, motors</li> </ul>	<ul style="list-style-type: none"> <li>■ direct mounting without coupling</li> <li>■ flexible hollow shaft concept up to 14 mm</li> <li>■ through hollow shaft or as end shaft (blind shaft)</li> <li>■ easy mounting procedure with clamping flange or fastening thread</li> <li>■ short mounting depth of 33 mm</li> <li>■ operating temperature up to 100 °C</li> <li>■ Fixing of the flange with a stator coupling or cylindrical pin</li> <li>■ applications, e.g. positioning drives, motors</li> </ul>
<b>Number of pulses</b>	5 ... 3 600	1 ... 5 000	4 ... 2 500
<b>Commutation</b>	None	None	None
<b>Technical Data - mechanical</b>			
Shaft diameter	Hollow shaft 4 / 6 / 8 / 10 mm	Hollow shaft 10 mm / 12 mm / 14 mm	Hollow shaft 10 mm / 12 mm / 14 mm
Max. speed	10 000 min <sup>-1</sup>	6 000 min <sup>-1</sup>	6 000 min <sup>-1</sup>
Max. speed (continuous)			
Protection class housing/bearing	IP 64/64	IP 65/64	IP 65/64
General design	as per DIN VDE 0160, protection class III	as per DIN VDE 0160, protection class III	as per DIN VDE 0160, protection class III
Operating temperature	-10 ... +70 °C	-10 ... +70 °C	-25 .. +100 °C
Diameter	36 mm	58 mm	58 mm
Mounting depth	39 mm	33 mm .. 50.5 mm (depends on version)	33 mm .. 50.5 mm (depends on version)
<b>Technical Data - electrical</b>			
Output	RS 422 / push-pull / push-pull complementary	RS 422 / push-pull / push-pull complementary	RS 422 / push-pull / push-pull complementary
Supply voltage (SELV)	DC 5 V / DC 10 - 30 V	DC 5 V / DC 10 - 30 V	DC 5 V / DC 10 - 30 V
Max. current w/o load	40 mA (DC 5 V), 30 mA (DC 24 V), 60 mA (DC 10 V)	40 mA (DC 5 V), 30 mA (DC 24 V), 60 mA (DC 10 V)	40 mA (DC 5 V), 30 mA (DC 24 V), 60 mA (DC 10 V)
Max. pulse frequency	300 kHz (RS 422) 200 kHz (push-pull)	300 kHz (RS 422) 200 kHz (push-pull)	300 kHz (RS 422) 200 kHz (push-pull)
Max. output load	RS 422: ±30 mA push-pull with short circuit protection: 30 mA (DC 10 - 30 V)	RS 422: ±30 mA push-pull with short circuit protection: 30 mA (DC 10 - 30 V)	RS 422: ±30 mA push-pull with short circuit protection: 30 mA (DC 10 - 30 V)
Pulse shape	Square wave	Square wave	Square wave
Page	60	66	66

## Motor Feedback Systems - Hollow shaft Encoders for Asynchronous & DC Motors



Type	RI 76TD	RI 80-E
<b>Special features</b>	<ul style="list-style-type: none"> <li>■ through hollow shaft</li> <li>■ shaft diameters 15 to 42 mm</li> <li>■ external diameter only 76 mm</li> <li>■ simple installation with clamping ring front or rear</li> <li>■ operating temperature up to 100 °C</li> <li>■ applications e.g. motors, printing machines, elevators</li> </ul>	<ul style="list-style-type: none"> <li>■ incremental Output</li> <li>■ 30...45 mm hollow shaft</li> <li>■ rugged mechanical design</li> <li>■ unbreakable disc</li> <li>■ integrated diagnostic system</li> <li>■ wide voltage range 5 ... 30 V</li> </ul>
<b>Number of pulses</b>	1 ... 10 000	1024, 2048, 4096 other number of pulses on request
<b>Commutation</b>	None	None
<b>Technical Data - mechanical</b>		
Shaft fixation	Clamping ring front or rear	Keyway, set screw
Coupling	stator coupling (hubshaft with tether)	Spring tether (single, double)
Shaft diameter	Hollow shaft 15 ... 42 mm	Hollow shaft 30 ... 45 mm
Max. speed	6 000 min <sup>-1</sup> (depends on version)	3 600 min <sup>-1</sup> (IP50), 1 500 min <sup>-1</sup> (IP64)
Protection class housing/bearing	IP 50/40 (Option: IP 65/64)	IP50, IP64
General design	as per DIN EN 61010 protection class III	as per DIN EN 61010, protection class III, Contamination level 2, over voltage class II
Operating temperature	-25 ... +100 °C	-20 ... +70 °C
Connection	Cable radial	Sub-D 15p. / cable, radial
Diameter	76 mm	
Weight	320 ... 580 g (depends on version)	1 000 g
<b>Technical Data - electrical</b>		
Output	RS 422/push-pull/push-pull complementary	RS 422/push-pull/push-pull complementary
Supply voltage (SELV)	DC 5 V/DC 10 - 30 V	DC 5 V ±10% or DC 5 - 30 V
Max. current w/o load	40 mA (DC 5 V), 30 mA (DC 24 V), 60 mA (DC 10 V)	60 mA (DC 5 V), 60 mA (DC 10 V), 35 mA (DC 24 V)
Max. pulse frequency	300 kHz (RS 422) 200 kHz (push-pull)	600 kHz (RS 422) 200 kHz (push-pull)
Max. output load	RS 422: ±30 mA push-pull with short circuit protection: 30 mA (DC 10 - 30 V)	RS 422: ±30 mA push-pull with short circuit protection: 40 mA (DC 5 - 30 V)
Alarm output	NPN-O.C. 5 mA	NPN-O.C. 5 mA
Pulse shape	Square wave	Square wave
Pulse duty factor	1 : 1	1 : 1
<b>Page</b>	72	76

## Motor Feedback Systems - Hollow shaft Encoders for Asynchronous & DC Motors




<b>Type</b>	<b>RIS 58-H</b>
<b>Special features</b>	<ul style="list-style-type: none"> <li>■ harmonic distortion less than 1 %</li> <li>■ extended temperature range, -40° up to +100 °C</li> <li>■ 500 kHz sine-wave incremental signal frequency response</li> <li>■ self-monitoring and error compensation</li> <li>■ secure against short-circuit and overload</li> </ul>
<b>Number of pulses</b>	1 000, 1 024, 2 048, 2 500, 5 000
<b>Technical Data - mechanical</b>	
Shaft diameter	10 mm, 12 mm hollow shaft
Balance tolerances	axial ±1.5 mm, radial ±0.2 mm
Max. speed	12 000 min <sup>-1</sup>
Torque	≤ 1 Ncm
Protection (EN 60529)	Bearing IP 64, Housing IP 65
General design	as per DIN EN 61010-1
Operating temperature	-40 ... +100 °C
Vibration (IEC 68-2-6)	≤ 100 m/s <sup>2</sup>
Shock (IEC 68-2-27)	≤ 1 000 m/s <sup>2</sup>
Material housing	Aluminium
Connection	Cable axial or radial Conin axial or radial
Size	Ø 58 mm
Weight approx.	270 g
<b>Technical Data - electrical</b>	
Supply voltage (SELV)	DC 5 V / ±10 %
Max. current w/o load	120 mA
Incremental signals A, B	Sinus-Cosinus 1 V <sub>ss</sub>
Absolute accuracy	±35"
Repeatability	±7"
Max. output frequency	500 kHz
Reference signal: R	> 0,4 V (1 pulse / turn)
<b>Page</b>	<b>97</b>

## Motor Feedback Systems - Hollow shaft Encoders for Asynchronous & DC Motors



Type	AC 58 - BiSS / SSI	AC 110 - BiSS / SSI
<b>Technical Data - mechanical</b>		
Housing diameter	58 mm	110 mm
Shaft diameter	Hub shaft 10 mm, 12 mm	up to 50 mm
Protection class shaft input	IP 64 or IP 67	IP 50 or IP 64
Protection class housing	IP 64 (IP 67 optional)	IP 50 or IP 64
Flange	Hubshaft with tether	Hollow shaft with tether
Max. speed	Continuous: 10 000 min <sup>-1</sup> , Short term: 12 000 min <sup>-1</sup>	IP 50: 3600 min <sup>-1</sup> IP 64: 1500 min <sup>-1</sup>
Shaft load	axial 40 N / radial 60 N	
Spring tether (hollow shaft)		
Tolerance axial / radial	± 1.5 mm / ± 0.2 mm	± 0.5 mm / ± 0.05 mm
Shock resistance (IEC 68-2-27)	1 000 m/s <sup>2</sup> (6 ms)	1000 m/ s <sup>2</sup> (6 ms)
Vibration resistance (IEC 68-2-6)	100 m/s <sup>2</sup> (10 ... 2 000 Hz)	100 m/ s <sup>2</sup> (10 - 500 Hz)
Operating temperature	-40 ... 100 °C	-20 ... +70°C
Weight approx. ST/MT	260 g / 310 g	1000 g
<b>Technical Data - electrical</b>		
Supply voltage	DC 5 V, -5 % / + 10 % or DC 10 - 30 V	DC 5 V (-5 % / +10 %) or DC 10-30 V
Max. current w/o load ST/MT	50 mA / 100 mA	120 mA
Interface	BiSS or Standard SSI	BiSS or Standard SSI
Lines/ Drives	Clock and Data/ RS422	Clock and Data/ RS422
Output code	Binary or Gray	Binary or Gray
Linearity	±1/2 LSB (± 1 LSB for resolution > 13 Bit)	
Resolution singleturn	10-17 Bit, Gray Excess: 360, 720 steps	10 - 17 Bit
Resolution multiturn	12 Bit	only singleturn
Optional incremental signals	Sine / Cosine 1 Vpp	Sine - Cosine 1 Vss
Number of pulses	2048	4096
3 db limiting frequency		500 kHz
Absolute accuracy	±35"	± 35"
Repeatability	±7"	± 7"
Parameterization	Code type, sense of rotation, warning, alarm	Code type, sense of rotation, warning, alarm
Control input	<u>Direction</u>	<u>Direction</u>
Reset key	Disable via parameterization	
Alarm output	Alarm bit (SSI option), warning bit and alarm bit (BiSS)	Alarm bit (SSI option), warning bit and alarm bit (BiSS)
Status LED	Green = OK.; red = alarm	
Connection	Cable axial or radial Conin axial or radial M12, 8 pole	Cable radial
Page	111	147

## Motor Feedback Systems - Comcoders for AC Synchronous & BLDC Motors

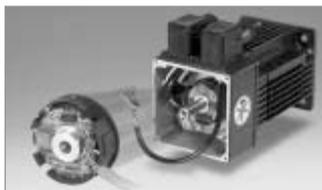


Type	M15	M21
<b>Special features</b>	<ul style="list-style-type: none"> <li>■ through hollow shaft, diameter 3.18 ... 10 mm</li> <li>■ output signals: A, B, N as incremental signals as well as 4, 6 or 8 pole commutation signals</li> <li>■ external diameter 40 mm (1.5")</li> <li>■ mounting depth only 28 mm (1.1")</li> <li>■ max. speed up to 12 000 min<sup>-1</sup></li> <li>■ operating temperature up to 120°C</li> </ul>	<ul style="list-style-type: none"> <li>■ through hollow shaft, diameter 6 ... 12.7 mm</li> <li>■ output signals: A, B, N as incremental signals as well as 4, 6, 8, 10, 12 or 16 pole commutation signals</li> <li>■ external diameter 53 mm (2.1")</li> <li>■ mounting depth only 20 mm (0.8")</li> <li>■ max. speed up to 12 000 min<sup>-1</sup></li> <li>■ operating temperature up to 120°C</li> </ul>
<b>Number of pulses</b>	200 ... 1 024	500 ... 2 048
<b>Commutation</b>	4, 6 or 8 pole	4, 6, 8, 10, 12 or 16 pole
<b>Technical Data - mechanical</b>		
Shaft diameter	Hollow shaft 3.18 ... 10 mm	Hollow shaft 6 ... 12.7 mm
Max. speed	12 000 min <sup>-1</sup>	12 000 min <sup>-1</sup>
Max. speed (continuous)		
Protection class housing/bearing	IP 40/40	IP 40/40 (with cover)
General design		
Operating temperature	-40 ... +120 °C	-40 ... +120 °C
Diameter	39.6 mm	53 mm
Mounting depth	27.9 mm	20.3 mm
<b>Technical Data - electrical</b>		
Output	NPN-O.C. / RS 422	NPN-O.C. / RS 422
Supply voltage (SELV)	DC 5 V / DC 12 V ±10%	DC 5 V / DC 2 V ±10%
Max. current w/o load	Incremental: max. 100 mA Incremental + Commutation: 120 mA	Incremental: max. 100 mA Incremental + Commutation: 175 mA
Max. pulse frequency	200 kHz	200 kHz
Max. output load	NPN-O.C. 16 mA RS 422: ±40 mA	RS 422: ±40 mA NPN-O.C. 16 mA
Max. output load commutation	NPN-O.C. 16 mA RS 422: ±40 mA	NPN-O.C. 16 mA RS 422: ±40 mA
Pulse shape	Square wave	Square wave
Phasing	90°±18° electrical	90°±18° electrical
Symmetry	180°±18° electrical	180°±18° electrical
Accuracy commutation signals	±6 arc-mins. max.	±6 arc-mins. max.
<b>Page</b>	186	191

## Motor Feedback Systems - Comcoders for AC Synchronous & BLDC Motors



Type	F10	F15	F21
<b>Special features</b>	<ul style="list-style-type: none"> <li>■ through hollow shaft, diameter 6 mm</li> <li>■ output signals: A, B, N as incremental signals as well as 6 or 10 pole commutation signals</li> <li>■ resolution up to 2 048 ppr</li> <li>■ frequency response to 300 kHz</li> <li>■ resolver compatible mounting</li> <li>■ operating temperature up to 120 °C</li> </ul>	<ul style="list-style-type: none"> <li>■ through hollow shaft, diameter 9.52 mm</li> <li>■ output signals: A, B, N as incremental signals as well as 6, 8 or 10 pole commutation signals</li> <li>■ resolution up to 2 048 ppr</li> <li>■ frequency response to 300 kHz</li> <li>■ resolver compatible mounting</li> <li>■ operating temperature up to 120 °C</li> </ul>	<ul style="list-style-type: none"> <li>■ through hollow shaft, diameter 12.7 mm</li> <li>■ output signals: A, B, N as incremental signals as well as 6, 8, 10, 12 or 16 pole commutation signals</li> <li>■ resolution up to 2 048 ppr</li> <li>■ frequency response to 300 kHz</li> <li>■ resolver compatible mounting</li> <li>■ operating temperature up to 120 °C</li> </ul>
<b>Number of pulses</b>	1 024, 2 048	1 024, 2 048	1 024, 2 048
<b>Commutation</b>	6 or 10 pole	6, 8 or 10 pole	6, 8, 10, 12 or 16 pole
<b>Technical Data - mechanical</b>			
Shaft diameter	Hollow shaft 6 mm	Hollow shaft 9.52 mm	Hollow shaft 12.7 mm
Max. speed	12 000 min <sup>-1</sup>	12 000 min <sup>-1</sup>	12 000 min <sup>-1</sup>
Max. speed (continuous)	5 000 min <sup>-1</sup>	5 000 min <sup>-1</sup>	5 000 min <sup>-1</sup>
Protection class housing/bearing	---	---	---
General design			
Operating temperature	0° ... +120 °C	0° ... +120 °C	0° ... +120 °C
Diameter	31.7mm max.	36.8 mm max.	53 mm max.
Mounting depth	22.5 mm	22.4 mm	26 mm max.
<b>Technical Data - electrical</b>			
Output	RS422	RS422	RS422
Supply voltage (SELV)	DC 5 V ±10 %	DC 5 V ±10 %	DC 5 V ±10 %
Max. current w/o load	100 mA max.	100 mA max.	100 mA max.
Max. pulse frequency	300 kHz	300 kHz	300 kHz
Max. output load	RS422: ±40mA,	RS422: ±40mA,	RS422: ±40mA,
Max. output load commutation	O.C.: 8mA or RS 422: ±40mA,	O.C.: 8mA or RS 422: ±40mA,	O.C.: 8mA or RS422: ±40mA,
Pulse shape	Square wave	Square wave	Square wave
Accuracy incremental signals	±2.5 arc-mins.	±2.5 arc-mins.	±2.5 arc-mins.
Accuracy commutation signals	±6 arc-mins. max.	±6 arc-mins. max.	±6 arc-mins. max.
<b>Page</b>	196	200	204

## Motor Feedback Systems - Comcoders for AC Synchronous & BLDC Motors

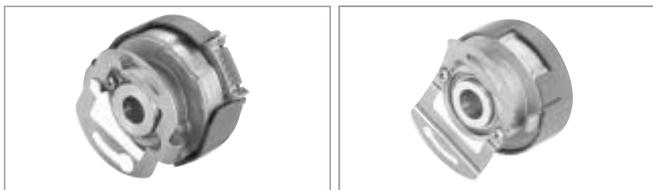

Type	F14	F18
<b>Special features</b>	<ul style="list-style-type: none"> <li>■ through hollow shaft, diameter 6 ... 8mm</li> <li>■ Phased Array Technology</li> <li>■ resolution up to 5 000 ppr</li> <li>■ with 4, 6, 8 and 10 pole commutation signals</li> <li>■ frequency response to 500 kHz</li> <li>■ stator coupling</li> <li>■ resolver compatible mounting (optional)</li> <li>■ external diameter 40 mm</li> <li>■ operating temperature up to +120°C</li> </ul>	<ul style="list-style-type: none"> <li>■ through hollow shaft, diameter 6 ... 12.7 mm</li> <li>■ Phased Array Technology</li> <li>■ resolution up to 10 000 ppr</li> <li>■ with 4, 6, 8, 10, 12 and 16 pole commutation signals</li> <li>■ frequency response to 500 kHz</li> <li>■ stator coupling</li> <li>■ external diameter 50 mm</li> <li>■ operating temperature up to +120°C</li> </ul>
<b>Number of pulses</b>	200 ... 5 000	500 ... 10 000
<b>Commutation</b>	4, 6, 8 or 10 pole	4, 6, 8, 10, 12 or 16 pole
<b>Technical Data - mechanical</b>		
Shaft diameter	Hollow shaft 6 ... 8 mm	Hollow shaft 6 ... 12.7 mm
Max. speed	12 000 min <sup>-1</sup>	12 000 min <sup>-1</sup>
Max. speed (continuous)		
Protection class housing/bearing	IP40/40 (with cover)	IP40/40 (with cover)
General design		
Operating temperature	0° ... +120 °C	0° ... +120 °C
Diameter	39.4 mm	49.7 mm
Mounting depth	34.6 mm max.	43.4 mm max.
<b>Technical Data - electrical</b>		
Output	O.C. or RS 422	O.C. or RS 422
Supply voltage (SELV)	DC 5 V ±10 %	DC 5 V ±10 %
Max. current w/o load	Incremental: max. 150 mA Incremental + Commutation: 175 mA	Incremental: max. 150 mA Incremental + Commutation: 175 mA
Max. pulse frequency	500 kHz	500 kHz
Max. output load	RS 422: ±40 mA NPN-O.C. 16 mA	RS 422: ±40 mA NPN-O.C. 16 mA
Max. output load commutation	NPN-O.C. 16 mA RS 422: ±40 mA	NPN-O.C. 16 mA RS 422: ±40 mA
Pulse shape	Square wave	Square wave
Accuracy incremental signals	±2.5 arc-mins.	±2.5 arc-mins.
Accuracy commutation signals	±6 arc-mins. max.	±6 arc-mins. max.
<b>Page</b>	208	212

## Motor Feedback Systems - Absolute Encoders for AC Synchronous & BLDC Motors



Type	AD 36	AD 58	AC 110
<b>Technical Data - mechanical</b>			
Housing diameter	37.5mm	58 mm	110 mm
Shaft diameter	8 mm	Cone 10 mm	up to 50 mm
Protection class shaft input	IP 40	IIP 40	IP 50 or IP 64
Protection class housing	IP 40	IP 40	IP 50 or IP 64
Flange	Hollow shaft with tether	Hollow shaft with tether, tapered shaft	Hollow shaft with tether
Max. speed	Continuous 10 000 min <sup>-1</sup> , Short term 12 000 min <sup>-1</sup>	Continuous 10 000 min <sup>-1</sup> , Short term 12 000 min <sup>-1</sup>	IP 50: 3600 min <sup>-1</sup> IP 64: 1500 min <sup>-1</sup>
Shaft load	0.01 Nm	0.01 Nm	
Torque	2.5 x 10 <sup>-6</sup> kgm <sup>2</sup>	3.8 x 10 <sup>-6</sup> kgm <sup>2</sup>	
Spring tether (hollow shaft)			
Tolerance axial / radial	± 0.5 mm/ ±0.05 mm	± 1.5 mm/ ±0.2 mm	± 0.5 mm / ± 0.05 mm
Shock resistance (IEC 68-2-27)	1 000 m/s <sup>2</sup> (6 ms)	1 000 m/s <sup>2</sup> (6 ms)	1000 m/ s <sup>2</sup> (6 ms)
Vibration resistance (IEC 68-2-6)	100 m/s <sup>2</sup> (10 ... 2 000 Hz)	100 m/s <sup>2</sup> (10 ... 2 000 Hz)	100 m/ s <sup>2</sup> (10 - 500 Hz)
Operating temperature	-25 ... +100 °C	-15... +120 °C	-20 ... +70 °C
Weight approx. ST/MT	80 g / 130 g	216 g / 310 g	1000 g
<b>Technical Data - electrical</b>			
Supply voltage	DC 5 V (-5 %/ +10 %) or DC 10-30 V	DC 5 V, -5 % / + 10 %	DC 5 V (-5 %/ +10 %) or DC 10-30 V
Max. current w/o load ST/MT	50 mA / 100 mA	50 mA / 100 mA	120 mA
Interface	BiSS or Standard SSI	BiSS or Standard SSI	
Lines/ Drives	Clock and Data / RS422	Clock and Data / RS422	Clock and Data/ RS422
Output code	Binary or Gray	Binary or Gray	Binary or Gray
Resolution singleturn	13 Bit (SSI), 19 Bit (BiSS)	13 Bit (SSI) ... max. 22 Bit (BiSS)	10 - 17 Bit
Resolution multiturn	12 Bit	12 Bit	only singleturn
Optional incremental signals	Sinus - Cosinus 1 Vss	Sinus - Cosinus 1 Vss	Sine - Cosine 1 Vss
Number of pulses	2048	2048	4096
3 db limiting frequency	500 kHz	500 kHz	500 kHz
Absolute accuracy	±35"	±35"	± 35"
Repeatability	±7"	±7"	± 7"
Alarm output	Aalarm bit (SSI), warning bit and alarm bit (BiSS)	alarm bit (SSI), warning bit and alarm bit (BiSS)	alarm bit (SSI), warning bit and alarm bit (BiSS)
Connection	Cable PCB-Connector 12 pole	Cable PCB-Connector 12 pole	Cable radial
Page	216	219	147

## Motor Feedback Systems - Sine-wave Encoders for AC Synchronous & BLDC Motors



Type	S21
<b>Special features</b>	<ul style="list-style-type: none"> <li>■ operating temperature range of -15 up to +120 °C</li> <li>■ 500 kHz limiting frequency with excellent signal quality</li> <li>■ excellent immunity to interference (EN 61000-4-4, Class 4)</li> <li>■ signal control and system monitoring</li> <li>■ high signal quality through control and error compensation</li> </ul>
<b>Technical Data - mechanical</b>	
Shaft form	Cone 1/10
Shaft variations	Tapered solid shaft (Tapered hollow shaft on request)
Shaft diameter	10 mm
Absolute max. shaft load radial / axial	with tapered solid shaft: 90 N / 20 N
Balance tolerances	axial ± 0.5 mm, radial ± 0.1 mm
Max. speed	12.000 min <sup>-1</sup>
Torque	≤ 1 Ncm
Protection class (EN 60529)	IP 40
General design	as per DIN EN 61010-1
Operating temperature	-15 ... +120 °C
Vibration resistance (IEC 68-2-6)	≤ 100 m/s <sup>2</sup>
Shock resistance (IEC 68-2-27)	≤ 1000 m/s <sup>2</sup>
Material housing	Aluminium
Connection	PCB connector + cable
Size	Ø 53.5 mm
Weight approx.	170 g
<b>Technical Data - electrical</b>	
Supply voltage (SELV)	DC 5 V ±10 %
Max. current w/o load	max. 120 mA
Incremental signals A, B	Sinus - Cosinus 1 V <sub>ss</sub>
Number of pulses	2048
Absolute accuracy	±35"
Repeatability	±7"
Max. output frequency	500 kHz
Reference signal: R	> 0.4 V (1pulse / turn)
Commutation signal: C, D	Sinus - Cosinus 1 V <sub>ss</sub> (1 period / turn)
Page	222

## Motor Feedback Systems - Resolver for AC Synchronous & BLDC Motors



Type	Resolvers
<b>Special features</b>	<ul style="list-style-type: none"> <li>■ Through hollow shaft, diameter 4 up to 92 mm</li> <li>■ compact design</li> <li>■ easy and quick mounting procedure (standardized resolver mounting)</li> <li>■ Operating temperature up to 155 °C</li> <li>■ Applications, e.g. motors, machine tools, robots, automated SMD equipment, medical technology</li> </ul>
<b>Number of pulses</b>	Drive or external electronics
<b>Commutation</b>	Drive or external electronics
<b>Technical Data - mechanical</b>	
Shaft diameter	Hollow shaft 4.0 .. 92.7 mm
Max. speed	20 000 min <sup>-1</sup> (special: >30 000 min <sup>-1</sup> )
Max. speed (continuous)	
Protection class housing/bearing	---
General design	
Operating temperature	-25 ... +155 °C
Diameter	Ø 26.5 ... 139.7 mm
Mounting depth	16.5 ... 31.8 mm
<b>Technical Data - electrical</b>	
Output	depends on input signal
Supply voltage (SELV)	
Max. current w/o load	
Max. pulse frequency	
Max. output load	
Max. output load commutation	
Pulse shape	Sine
Tolerance	typical +/- 10°
Accuracy commutation signals	---
Page	225

for Miniature DC and Stepper Motors



- Ideal for position and speed sensing in small machines and actuators
- Low power standby mode is ideal for battery powered devices
- Operating frequency to 200 kHz
- Resolution to 512 lines/rev

GENERAL INFORMATION

The type E9 incremental optical encoder provides high performance feedback for precision motion control in a very small package. Its small envelope makes it ideal for instrument axes for position and speed control in mechanisms too small to accept standard encoders. Its high performance, advanced features, and competitive pricing make it the encoder of choice for a broad range of applications.

The E9 optical encoders utilize a patentpending ASIC that integrates all encoder electronics, including the optoelectronic sensors, which enhances reliability and accuracy.

Outputs are quadrature A and B channels with up to 512 lines per rev, an index pulse, unique up/down and rotation direction signals (version 2) or complementary CMOS-compatible (version 1). The E9 also has a low-power standby mode to conserve power in battery-operated applications.

TECHNICAL DATA  
mechanical


Weight	5.07 g	
Moment of inertia	0.20 gcm <sup>2</sup>	
Hollow shaft diameter	1.5 / 2.0 / 2.5 / 3.0 / 4.0 mm 1.125" / 0.156"	
Hollow shaft tolerance	+ 0.010 / - 0.000 mm	
Mating shaft length	max. 12.16 mm min. 11.36 mm	
Mating shaft runout	± 0.0125 mm	
Mating shaft endplay	>256 ppr	±0.076mm;
	250, 256 ppr	+0.127 / -0.076mm;
	<250 ppr	+0.178/ -0.076mm
Operating temperature	-40 ... + 100 °C	
Storage temperature	-50 ... + 125 °C	
Relative humidity	90 %, non-condensing	

## for Miniature DC and Stepper Motors

### TECHNICAL DATA electrical

Code	Incremental, optical
Resolution	100 up to 512 ppr
Phasing	90° ±18° electrical
Symmetry	180 ±18° electrical
Index pulse width	90° ±36° electrical
Supply voltage	DC 5 V ±10 %
Supply current	10 mA, typ.
Standby current	max. 50 µA
Output signals	min. 2.5 V high (V <sub>OH</sub> ) max. 0.5 V low (V <sub>OL</sub> )
Output current	3 mA sink/source (25°C), 2 mA (100°C)
Max. output frequency	200 kHz
Connection	10 pole header
Recommended mating connector	Thomas & Betts; part number 622-1030; on request


### DIMENSIONAL DRAWINGS

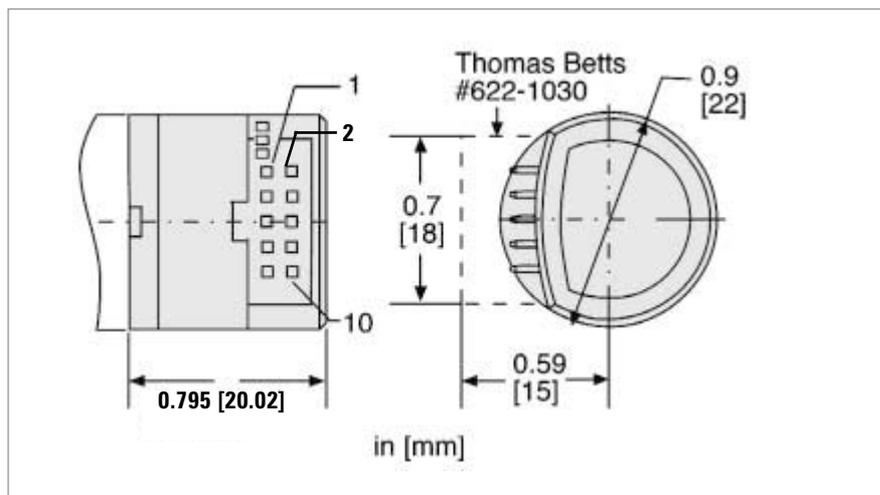

# Motor Feedback Systems Type E 9

## for Miniature DC and Stepper Motors

### OUTPUT WAVEFORMS AND CONNECTIONS (Direction viewing encoder cover)

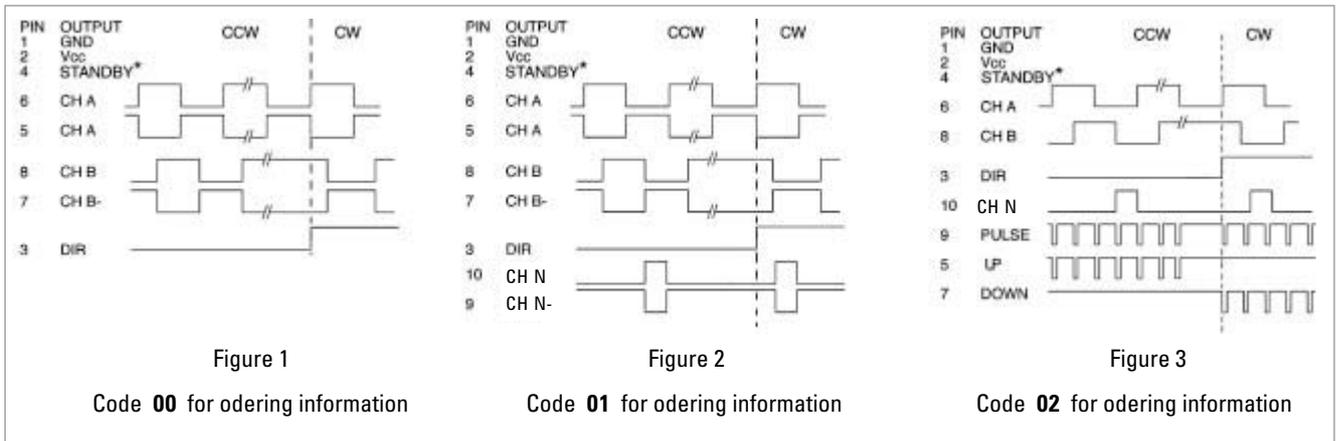

### ACCESSORIES

	Ordering code
10 pole header, 30 cm ribbon cable with connector	CA 0 040 012

### ORDERING INFORMATION

Type	Pulses ppr	Hub shaft	Output	Mounting
E9-	<b>0100</b> <b>0300</b> <b>0144</b> <b>0360</b> <b>0200</b> <b>0500</b> <b>0256</b> <b>0512</b>	<b>1.5</b> 1.5 mm <b>2.0</b> 2.0 mm <b>2.5</b> 2.5 mm <b>3.0</b> 3.0 mm <b>125</b> 0.125 inch <b>156</b> 0.156 inch	<b>00</b> see fig. 1 <b>01</b> see fig. 2 <b>02</b> see fig. 3	<b>0</b> No mounting base <b>A</b> 4 x M1.6 on 0.728" TK <b>C</b> 2 x #2-56 on 0.75" TK <b>D</b> 3 x #0-80 on 0.823" TK <b>E</b> 2 x #2-56 on 1.812" TK

#### Important:

To properly install type E9, a specialized **mounting kit** must be purchased. Only one kit is required to install any number of encoders with the same hub shaft size.

MK

E9

Please designate hub shaft diameter.

Hub shaft

**1.5** 1.5 mm

**2.0** 2.0 mm

**2.5** 2.5 mm

**3.0** 3.0 mm

**125** 0.125 inch

**156** 0.156 inch

Example: Kit for installing encoders with 3.0 mm hub shaft = MK E9 3.0

for Miniature DC and Stepper Motors



- Ideal for position and speed sensing in small machines and actuators
- 200 kHz operating frequency
- Resolution to 512 lines/rev

GENERAL INFORMATION

With a total length less than 15mm and a very low mass, the type M9 incremental optical encoder is ideally suited for use on the moving heads of pick-and-place type machines.

The M9 may be used as direct replacements for most Hewlett Packard HEDS-5XXX encoders with no changes to the motor or cable.

The M9 provides high performance feedback for precision motion control in a very small package. Its small envelope makes it ideal for instrument axes for position and speed control in mechanisms too small to accept standard encoders.

Its high performance, advanced features, and competitive pricing make it the encoder of choice for a broad range of applications.

It utilizes an ASIC that integrates all encoder electronics, including the optoelectronics sensors, which enhances reliability and accuracy.

Outputs are single-ended quadrature A and B channels with up to 512 lines per rev plus an index pulse.

TECHNICAL DATA  
mechanical


Weight	4.14 g	
Moment of inertia	0.11 gcm <sup>2</sup>	
Hollow shaft diameter	1.5 / 2.0 / 2.5 / 3.0 / 4.0 mm 1.125" / 0.156"	
Hollow shaft tolerance	+ 0.010 / - 0.000 mm	
Mating shaft length	max. 11.1 mm min. 9.75 mm	
Mating shaft runout	± 0.0125 mm	
Mating shaft endplay	256 ppr	±0.076 mm;
	250 / 256 ppr	+ 0.127 / - 0.076 mm;
	< 250 ppr	+ 0.178 / - 0.076 mm
Operating temperature	-40 ... + 100 °C	
Storage temperature	-50 ... + 125 °C	
Relative humidity	90 %, non-condensing	

for Miniature DC and Stepper Motors


TECHNICAL DATA  
electrical

Code	Incremental, optical
Resolution	100 up to 512 ppr
Phasing	90° ±18° electrical
Symmetry	180 ±18° electrical
Index pulse width	90° ±36° electrical
Supply voltage	DC 5 V ±10 %
Supply current	10 mA, typ.
Output signals	min. 2.5 V high (V <sub>OH</sub> ) max. 0.5 V low (V <sub>OL</sub> )
Output current	6 mA sink/source (25°C), 4 mA (100°C)
Max. output frequency	200 kHz
Connection	5 pole header
Recommended mating connector	AMP; part number 103675-4 (on request)

DIMENSIONAL DRAWINGS

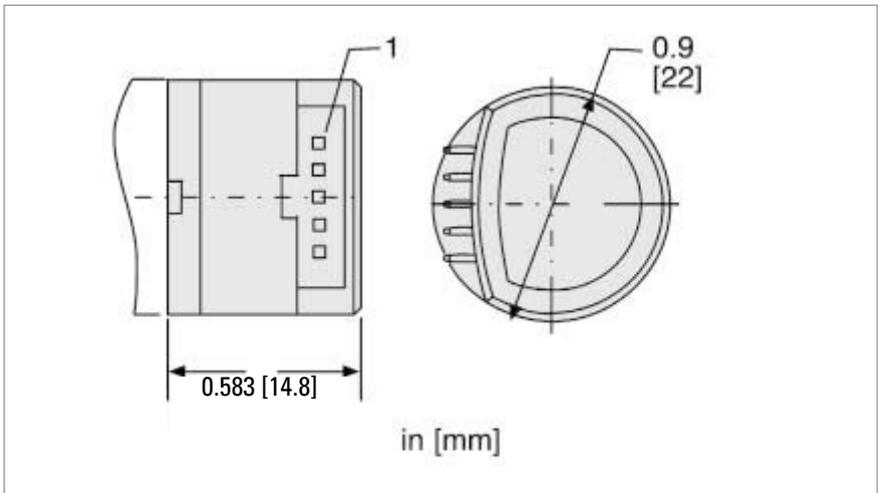

OUTPUT WAVEFORMS  
AND CONNECTIONS  
(Direction CCW  
viewing encoder cover)

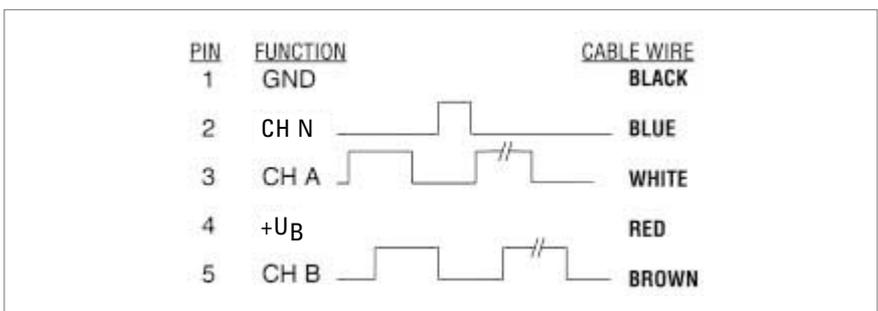

## for Miniature DC and Stepper Motors

### ACCESSORIES

	Ordering code
5 pole header, 30 cm ribbon cable with connector	CA 0 050 012

### ORDERING INFORMATION

Type	Pulses ppr / poles	Mounting	Hub shaft	Output
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>M9-</b>	<b>0100 / 0</b> <b>0144 / 0</b> <b>0200 / 0</b> <b>0256 / 0</b> <b>0300 / 0</b> <b>0360 / 0</b> <b>0500 / 0</b> <b>0512 / 0</b>	<b>0</b> No mounting base <b>A</b> 4 x M1.6 on 18.5mm TK <b>C</b> 2 x #2-56 on 19.05 mm TK <b>D</b> 3 x #0-80 on 20.9 mm TK <b>E</b> 2 x #2-56 on 46.02 mm TK	<b>1.5</b> 1.5 mm <b>2.0</b> 2.0 mm <b>2.5</b> 2.5 mm <b>3.0</b> 3.0 mm <b>4.0</b> 4.0 mm <b>125</b> 0.125 inch <b>156</b> 0.156 inch	<b>1</b> 5 pin header <b>2</b> flying leads

#### Important:

To properly install type M9, a specialized **mounting kit** must be purchased. Only one kit is required to install any number of encoders with the same hub shaft size.

**MK M9**



Please designate  
hub shaft diameter.

Hub shaft  
**1.5** 1.5 mm  
**2.0** 2.0 mm  
**2.5** 2.5 mm  
**3.0** 3.0 mm  
**125** 0.125 inch  
**156** 0.156 inch

Example: Kit for installing encoders with 3.0 mm hub shaft = MK M9 3.0

for Miniature DC and Stepper Motors



- Ideal economical feedback device for servo and step motors
- Short axial length and compact 1.5 inch diameter
- Easy "snap-on" installation
- High resolution to 1024 lines/rev and 200 kHz bandwidth
- Drop-in replacement for HP 5540
- CE-qualified

GENERAL INFORMATION

The type M14 of incremental optical encoders provides high performance feedback for precision motion control in a small, low cost package.

Its high performance, advanced features, and competitive pricing make it the encoder of choice for a broad range of applications.

The M14 optical encoder utilizes a patentpending ASIC that integrates all encoder electronics, including the optoelectronic sensors, which enhances reliability and accuracy.

Quadrature A and B channels with up to 1024 lines per revolution and reference pulse are output as single-ended TTL/CMOS compatible signals.

The M 14 can be used as drop-in replacement for HP 5540.

TECHNICAL DATA  
mechanical


Weight	6.2 g	
Moment of inertia	0.13 gcm <sup>2</sup>	
Hollow shaft diameter	3.0 bis 8.0 mm	
Hollow shaft tolerance	+0.010 mm / -0.000 mm	
Mating shaft length	max. 13.3 mm; min. 11.07 mm	
Mating shaft runout	± 0.0125 mm	
Mating shaft endplay	>512 ppr	±0.076 mm;
	500 / 512 ppr	±0.127 / - 0.076 mm;
	< 500 ppr	+ 0.178 / - 0.076 mm
Operating temperature	-40 °C ... 100 °C	
Storage temperature	-50 °C ... 125 °C	
Relative humidity	90 % non-condensing	

for Miniature DC and Stepper Motors

TECHNICAL DATA  
electrical

Code	Incremental, optical
Resolution	200 up to 1 024 ppr
Phasing	90° ±18° electrical
Symmetry	180 ±18° electrical
Index pulse width	90° ±36° electrical
Supply voltage	5 VDC ±10 %
Supply current	10 mA, typ.
Output signals	min. 2.5 V high (V <sub>OH</sub> ) max. 0.5 V low (V <sub>OL</sub> )
Output current	6mA sink/source (25°C) 4 mA (100°C)
Max. output frequency	200 kHz
Connection	5 pole header
Recommended mating connector	AMP, part number. 103969-4 (on request)

DIMENSIONAL DRAWING

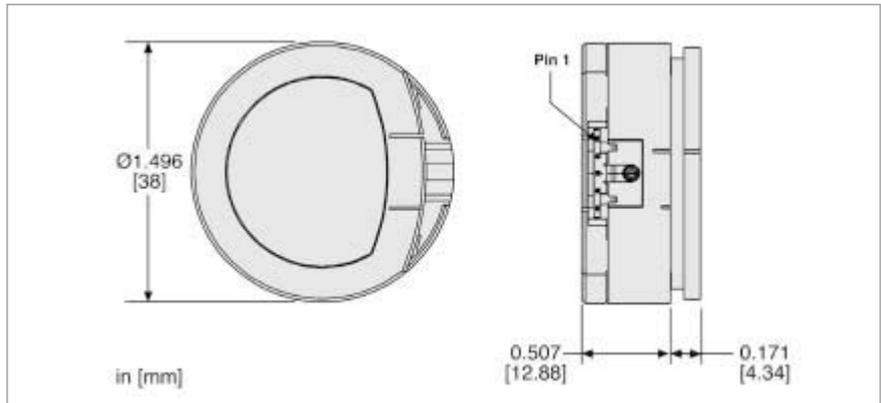

OUTPUT WAVEFORMS  
& CONNECTIONS  
(Direction viewing encoder cover)

PIN	FUNCTION		CABLE WIRE
5	GND		BLACK
4	CH N		BLUE
3	CH A		WHITE
2	+U <sub>B</sub>		RED
1	CH B		BROWN

# Motor Feedback Systems Type M 14

## for Miniature DC and Stepper Motors

### ACCESSORIES

	Ordering code
5 pole header, 30 cm ribbon cable with connector	CA 0 060 012

### ORDERING INFORMATION

Type	Pulses ppr / poles	Mounting	Hub shaft
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>M14-</b>	<b>0 200 / 0</b> <b>0 400 / 0</b> <b>0 500 / 0</b> <b>0 512 / 0</b> <b>1 000 / 0</b> <b>1 024 / 0</b>	<b>0</b> No mounting base <b>A</b> 2 x #2-56 on 1.28" TK <b>B</b> 3 x #0-80 on 0.823" TK <b>C</b> 2 x #2-56 on 0.75" TK	<b>3.0</b> 3 mm <b>187</b> 0.1873 inch <b>4.0</b> 4 mm <b>240</b> 0.2498 inch <b>5.0</b> 5 mm <b>250</b> 0.2501 inch <b>6.0</b> 6 mm <b>312</b> 0.3123 inch <b>8.0</b> 8 mm <b>374</b> 0.3748 inch <b>125</b> 0.1248 inch <b>375</b> 0.3750 inch

#### Important:

To properly install type M14, a specialized **mounting kit** must be purchased. Only one kit is required to install any number of encoders with the same hub shaft size.

<b>MK</b> <b>M14</b> <input type="checkbox"/>	Hub shaft	
	<b>3.0</b> 3 mm	<b>187</b> 0.1873 inch
	<b>4.0</b> 4 mm	<b>240</b> 0.2498 inch
	<b>5.0</b> 5 mm	<b>250</b> 0.2501 inch
	<b>6.0</b> 6 mm	<b>312</b> 0.3123 inch
	<b>8.0</b> 8 mm	<b>374</b> 0.3748 inch
	<b>125</b> 0.1248 inch	<b>375</b> 0.3750 inch

Please designate hub shaft diameter.

Example: Kit for installing encoders with 0.1248" mm hub shaft = MK M14 125

# Motor Feedback Systems - Hollow shaft Encoders for Asynchronous & DC Motors Incremental

## OVERVIEW

Our hollow shaft encoder industry types are particularly suitable as a motor feedback product for asynchronous- and DC motors.

Due to the partially higher requirements on the operating temperature, there are specially developed high temperature versions (-TD) available, among certain types.



### HOLLOW SHAFT ENCODER RI36-H

- Miniature industry encoder for high numbers of pulses (5 .. 3600)
- Hollow shaft (up to 10mm)
- Short overall length
- Easy and quick mounting procedure

There are two different spring tethers available.

Detailed description: Page 60



### HOLLOW SHAFT ENCODERS RI58-D, TD, -G, TG

- Flexible hollow shaft design up to diameter 14 mm (-D,TD)
- 15mm hollow shaft (-G,TG)
- Short overall length
- Easy installation by means of clamping ring or blind shaft
- Operating temperature up to 100°C (RI 58 TD and TG)
- High number of pulses (5 .. 5000) with -D
- Limited number of pulses (4 .. 2500) with TD
- Limited number of pulses (50 .. 2500) with TG

The RI58 hollow shaft family offers a broad spectrum of mounting possibilities and is the right choice for all drive systems because of its high temperature option.

Detailed description of RI 58-D, TD: Page 66

Detailed information of RI58-G, TG on request



### HOLLOW SHAFT ENCODER RI76TD

- Through hollow shaft with up to diameter 42 mm
- Short overall length with an outside diameter of only 76 mm
- Easy installation by means of clamping ring
- Operating temperature up to 100 °C

Different Mounting options are available.

Detailed description: Page 72

# Motor Feedback Systems - Hollow shaft Encoders for Asynchronous & DC Motors **Absolute**

## OVERVIEW

Our absolute hollow shaft encoders of the Acuro family are particularly suitable as a motor feedback product for asynchronous- and DC motors, with special requirements concerning dynamics and absolute positioning. Besides the standard interfaces BiSS and SSI they offer additional Sin Cos of output signals.



### ABSOLUTE HOLLOW SHAFT ENCODER AC58

- Absolute standard industry encoder with high resolution
- Hollow shaft (up to 12 mm)
- Short overall length
- Easy and quick mounting procedure

The AC58 offers all characteristics of the Acuro family in one universal design.

Detailed description: Page 111



### ABSOLUTE HOLLOW SHAFT ENCODER AC110

- Robust absolute industry encoder with high resolution
- Hollow shaft (up to 50mm)
- Short overall length
- Easy and quick mounting procedure

The AC110 offers all characteristics of the Acuro family for applications with large shaft diameters (elevators, direct drives).

Detailed description: Page 147

## for AC Synchronous & BLDC Motors



- Incremental + commutation
- Practically no speed limitation, since up to 12000 RPM
- Very good dynamic behaviour through low moment of inertia of rotor and its minimal influence on the motor
- Very good drive stiffness since no coupling is used
- Compact size
- Excellent price-performance ratio
- Increased temperature range, -40 to +120°C
- Incomparable shaft play tolerances (to 0.7 mm axial)
- Better frequency, 200 KHz
- Flexibility, since the user can integrate in all actual motor sizes
- Simple mounting and adjustment since encoders come aligned and gapped

### NUMBER OF PULSES

200, 400, 500, 1000, 1024;  
optional 4, 6 or 8 pole commutation signals

### TECHNICAL DATA mechanical

Weight	23 g without cover, 28 g with cover
Dimensions	
Outside diameter	39.6 mm with cover, 37.1 mm without cover
Depth	27.9 mm with cover <sup>1</sup> , 24.1 mm without cover
Hub shaft diameters	6 mm / 8 mm / 10 mm / 3.18 mm (1/8") / 4.76 mm (3/16") / 6.35 mm (1/4") / 9.52 mm (3/8")
Hollow shaft tolerance	+0.026 mm ... -0.000 mm
Mating shaft length	min. 12 mm max. 22 mm with closed cover
Shaft misalignment	axial endplay <sup>2</sup> : +0.38 mm ... -0.38 mm radial runout: 0.05 mm (incl. angular misalignment)
Alignment of encoder channels to motor windings	coarse alignment: index mark on hub fine alignment: ±15° mechanical alignment range
Max. speed	12000 min <sup>-1</sup>
Moment of inertia	4.7 gcm <sup>2</sup>
Protection class (EN 60529)	IP 40 <sup>4</sup> (version cable) IP 30 <sup>4</sup> (version dual row connector)
Operating temperature	-40 ... +120 °C
Storage temperature	-40 ... +85 °C
Vibration resistance (IEC 68-2-6)	25 m/s <sup>2</sup> (5 ... 2000 Hz)
Shock resistance (IEC 68-2-27)	500 m/s <sup>2</sup> (11 ms)
Connection	shielded cable radial or dual row connector <sup>3</sup>
Housing	glassfibre reinforced plastic

<sup>1</sup> for radial cable connection

<sup>2</sup> + means away from mounting face

<sup>3</sup> 10 pins for version incremental only, 14 pins for version incremental+commutation

<sup>4</sup> mounted and with cover

# Motor Feedback Systems Type M 15

## for AC Synchronous & BLDC Motors


### TECHNICAL DATA electrical

General design	as per DIN EN 61010-Teil 1, protection class III, contamination level 2, over voltage class II	
Supply voltage	5 or 12 V DC $\pm 10\%$ (SELV)	
Max. current w/o load	Incremental: max. 100 mA Incremental + Commutation: max. 120 mA	
Recommended external fuse	T 0.125 A	
Output circuit	NPN-Open Collector, max. 16 mA, Pull-up 2.0 K $\Omega$ RS 422, max. 40 mA	
Output signals		
Incremental	NPN-O.C: A, B, N	RS 422: A, B, N, $\bar{A}$ , $\bar{B}$ , $\bar{N}$
Commutation (optional):	NPN-O.C: U, V, W	RS 422: U, V, W, $\bar{U}$ , $\bar{V}$ , $\bar{W}$
Accuracy		
Incremental signals	max. $\pm 5$ arc-mins. (edge to any edge)	
Commutation signals	max. $\pm 6$ arc-mins.	
Phasing		
Incremental signals (A to B)	$90^\circ \pm 18^\circ$ electrical	
Commutation signals	8 pole: $30^\circ$ , 6 pole: $40^\circ$ , 4 pole: $60^\circ$ mechanical	
Index to U	$\pm 1^\circ$ mech. index pulse center to U channel edge	
Pulse width		
Incremental signals	$180^\circ \pm 18^\circ$ electrical	
Commutation signals	8 pole: $45^\circ$ , 6 pole: $60^\circ$ , 4 pole: $90^\circ$ mechanical	
Max. output frequency	200 kHz	
Noise immunity <sup>1</sup>	as per EN 61000-4- 2, 3, 4, 8 EN 61000-4- 6 with 3 V/m	
Noise emission <sup>1</sup>	as per EN 50081-2 (1993 edition)	


<sup>1</sup> EMC values are only valid for version with screened cable (connection code A ... H)

for AC Synchronous & BLDC Motors

DIMENSIONAL DRAWINGS

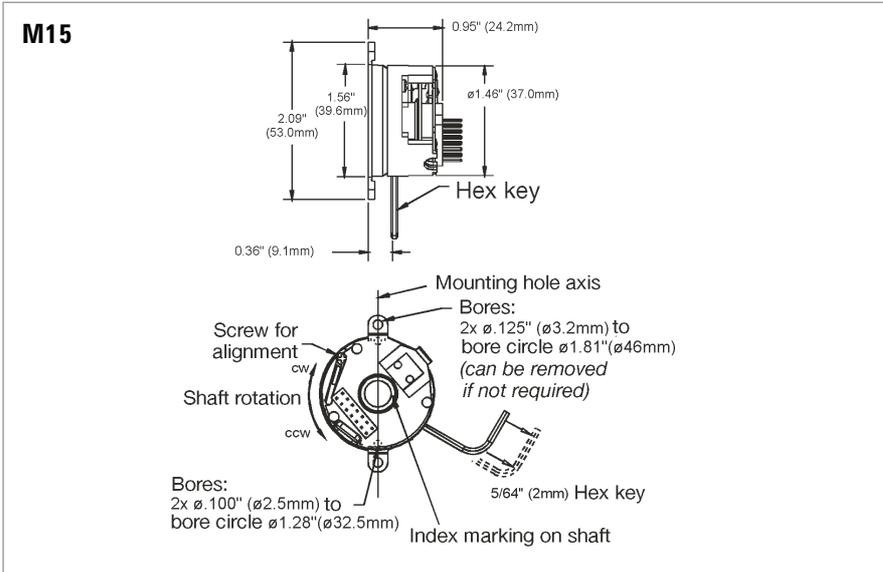

PULSE DIAGRAM

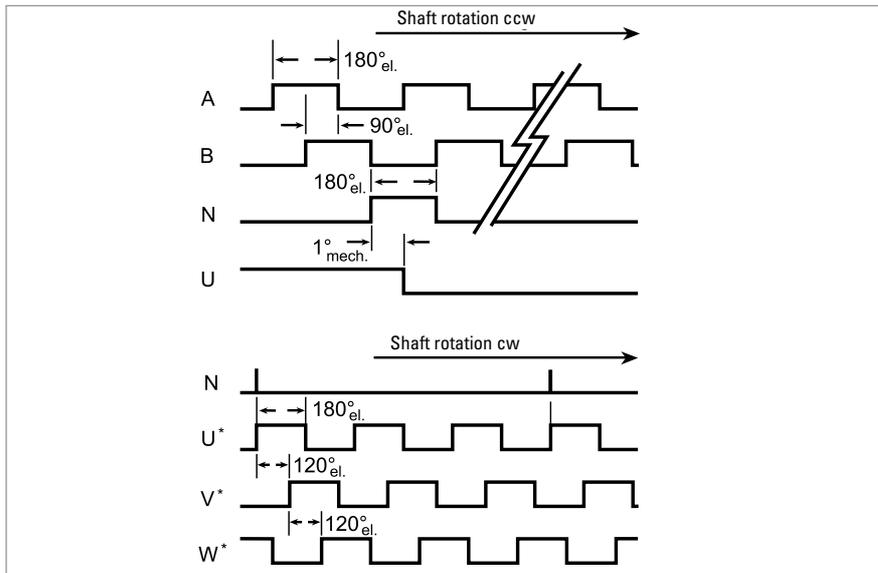

\* Example with 6 pole commutation

for AC Synchronous & BLDC Motors

CONNECTION DIAGRAM CABLE

Function	Colour for version incremental only, Code Electrical = 0, 1, 3	Colour for version incremental + commutation, Code Electrical = 6, 7, 9
$V_{cc\ com}^1$		red/white <sup>3</sup>
$V_{cc\ inc}^1$	red	red
GND inc	black	black
GND com		black/white <sup>3</sup>
$\bar{A}^2$	red/black	blue/black
A	green	blue
$\bar{B}^2$	white/black	green/black
B	orange	green
$\bar{N}^2$	blue	violet/black
N	white	violet
$\bar{U}^2$		brown/black
U		brown
$\bar{V}^2$		grey/black
V		grey
$\bar{W}^2$		white/black
W		white

<sup>1</sup>  $V_{CCcom}$  resp.  $V_{CCinc}$  = +5 V DC or +12 V DC (see ordering data electrical)

<sup>2</sup> only with Output<sub>inc/com</sub> = RS 422

<sup>3</sup> not connected for code 6 and 9, as here  $U_{inc} = U_{com}$



CONNECTION DIAGRAM DUAL ROW CONNECTOR

Pin	10 pole only incr., NPN-O.C., Code Electr. = 0, 1	10 pole only incr., RS422, Code Electr. = 3	14 pole incr. + commutation, Code Electr. = 6, 7, 9
1	A		$V_{cc}$
2	$V_{cc}$	$V_{cc}$	U
3	GND	GND	$\bar{U}$
4			V
5		$\bar{A}$	$\bar{V}$
6		A	W
7		$\bar{B}$	$\bar{W}$
8	B	B	$\bar{A}$
9		$\bar{N}$	A
10	N	N	B
11			$\bar{B}$
12			N
13			GND
14			$\bar{N}$

Pin Numbering:

For dual row connector with ribbon cable:

The cable side marked red designates pin 1

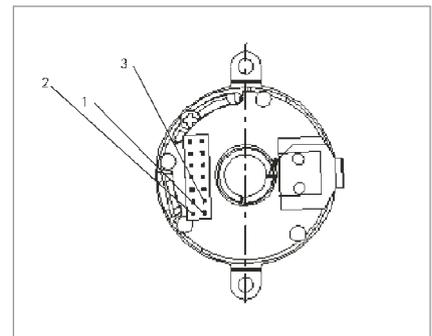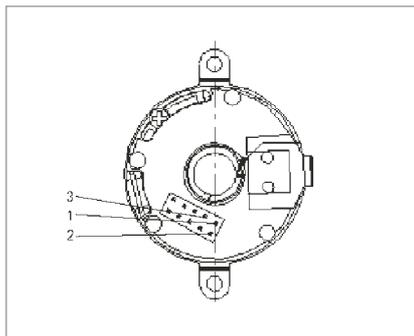

## for AC Synchronous & BLDC Motors

### ORDERING INFORMATION

Type	Pulses ppr incremental <sup>2</sup>	Poles commutation <sup>2</sup>	Housing	Electrical <sup>1</sup>	Hub diameter <sup>2</sup>	Connection
<input type="checkbox"/>	<input type="checkbox"/> /	<input type="checkbox"/> -	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>M15-</b>	<b>0 200</b> <b>0 400</b> <b>0 500</b> <b>1 000</b> <b>1 024</b>	<b>0</b> without <b>4</b> 4 pole <b>6</b> 6 pole <b>8</b> 8 pole	<b>0</b> without cover <b>1</b> closed cover for blind shaft <b>2</b> cover with bore for through shaft	<b>incremental only without commutation</b> <b>0</b> $U_{inc}=5\text{ V}$ ; output <sub>inc</sub> =NPN-O.C. <b>1</b> $U_{inc}=12\text{ V}$ ; output <sub>inc</sub> =NPN-O.C. <b>3</b> $U_{inc}=5\text{ V}$ ; output <sub>inc</sub> =RS 422 <b>incremental plus commutation signals</b> <b>6</b> $U_{inc}=5\text{ V}$ ; output <sub>inc</sub> =RS 422, $U_{com}=5\text{ V}$ ; output <sub>com</sub> =NPN-O.C. <b>7</b> $U_{inc}=5\text{ V}$ ; output <sub>inc</sub> =RS 422, $U_{com}=12\text{ V}$ ; output <sub>com</sub> =NPN-O.C. <b>9</b> $U_{inc}=5\text{ V}$ ; output <sub>inc</sub> =RS 422, $U_{com}=5\text{ V}$ ; output <sub>com</sub> =RS 422	<b>0</b> 6.35 mm ( $1/4''$ ) <b>1</b> 9.52 mm ( $3/8''$ ) <b>4</b> 6 mm <b>5</b> 8 mm <b>6</b> 10 mm <b>8</b> 4.76 mm ( $3/16''$ ) <b>9</b> 3.18 mm ( $1/8''$ )	<b>0</b> dual row connector <b>1...8</b> dual row connector with mating ribbon cable 1=30 cm, 2=60 cm, ... <b>A...H</b> screened cable radial, A=30 cm, B=60 cm, ...
<sup>1</sup> $U_{inc}$ : Supply voltage incremental, $U_{com}$ : Supply voltage commutation (only if commutation selected) <sup>2</sup> allowed combinations see available combinations (pulses/poles)						

### Available combinations (pulses/poles)

Pulses ppr	Number of poles			
	0	4	6	8
0200	X			
0400	X			
0500	X	X	X	X
1000	X	X	X	X
1024	X	X	X	X

for AC Synchronous & BLDC Motors



- Incremental + commutation
- Modular hollow shaft encoder as feedback for Brushless DC (BLDC) Servos, DC Servos and Step Motors
- Outside diameter 53 mm (2.1")
- Hub diameters 6 ... 12 mm (1/4" ... 1/2")
- Height 20 mm (0.8")
- Resolution 500 ... 2048 lines
- Standard Operating temperature -40 ... +120 °C
- Maximum speed 12000 RPM
- Easy installation and alignment

NUMBER OF PULSES

500, 1000, 1024, 2000, 2048;  
optional 4, 6, 8, 10, 12 or 16 pole commutation signals

TECHNICAL DATA  
mechanical

Weight	28 g without cover, 43 g with cover
Dimensions	
Outside diameter	53 mm with cover, 51 mm without cover
Depth	20.3 mm with cover excluding connector 17.9 mm without cover
Hub shaft diameters	6 mm / 8 mm / 10 mm / 12 mm sowie 6.35 mm (1/4") / 9.52 mm (3/8") / 11.11 mm (7/16") / 12.7 mm (1/2")
Hollow shaft tolerance	+0.026 mm ... -0.000 mm
Shaft misalignment	axial endplay: +0.13 mm <sup>1</sup> ... -0.38 mm radial runout: 0.05 mm (incl. angular misalignment)
Mating shaft length	min. 16.5 mm max. 19 mm when used with closed cover
Alignment of encoder channels to motor windings	coarse alignment: index mark on the housing and disc/hub fine alignment: ±15° mechanical alignment range
Max. speed	12000 min <sup>-1</sup>
Moment of inertia	4.7 gcm <sup>2</sup>
Protection class (EN 60529)	IP 40 <sup>2</sup> when mounted with cover
Operating temperature	-40 ... +120 °C
Storage temperature	-40 ... +120 °C
Vibration resistance (IEC 68-2-6)	25 m/s <sup>2</sup> (5 ... 2000 Hz)
Shock resistance (IEC 68-2-27)	500 m/s <sup>2</sup> (11 ms)
Connection	shielded cable radial or dual row connector <sup>3</sup>
Housing	glassfibre reinforced plastic

<sup>1</sup> + indicates away from mounting face (cover)

<sup>2</sup> IP 50 on request

<sup>3</sup> 10 pins for version incremental only, 14 pins for version incremental +commutation

for AC Synchronous & BLDC Motors

TECHNICAL DATA  
electrical


General design	as per DIN EN 61010-Teil 1, protection class III, contamination level 2, over voltage class II	
Supply voltage	5 or 12 V DC $\pm 10\%$ (SELV)	
Max. current w/o load	Incremental: max. 100 mA; commutation: max. 75 mA	
recommended external fuse	2 x T 0.125 A	
Output circuit	NPN-Open Collector, max. 16 mA; Pull-up 2.0 K $\Omega$ RS 422, max. 40 mA	
Output signals		
Incremental	NPN-O.C: A, B, N	RS 422: A, B, N, $\bar{A}$ , $\bar{B}$ , $\bar{N}$
Commutation (optional):	NPN-O.C: U, V, W	RS 422: U, V, W, $\bar{U}$ , $\bar{V}$ , $\bar{W}$
Accuracy		
Incremental signals	max. $\pm 5$ arc-mins. (edge to any edge)	
Commutation signals	max. $\pm 6$ arc-mins.	
Phasing		
Incremental signals (A to B)	90° $\pm 18^\circ$ electrical	
Commutation signals	12 pole: 20°, 8 pole: 30°, 6 pole: 40°, 4 pole: 60° mechanical	
Index to U	$\pm 1^\circ$ mech. index pulse center to U channel edge	
Pulse width		
Incremental signals	180° $\pm 18^\circ$ electrical	
Commutation signals	12 pole: 30°, 8 pole: 45°, 6 pole: 60°, 4 pole: 90° mechanical	
Max. output frequency.	200 kHz	
Noise immunity <sup>1</sup>	as per EN 50082-2	
Noise emission <sup>1</sup>	as per EN 50081-2	

<sup>1</sup> EMC values are only valid for versions with output RS422 and screened cable


# Motor Feedback Systems Type M 21

## for AC Synchronous & BLDC Motors

### DIMENSIONAL DRAWINGS

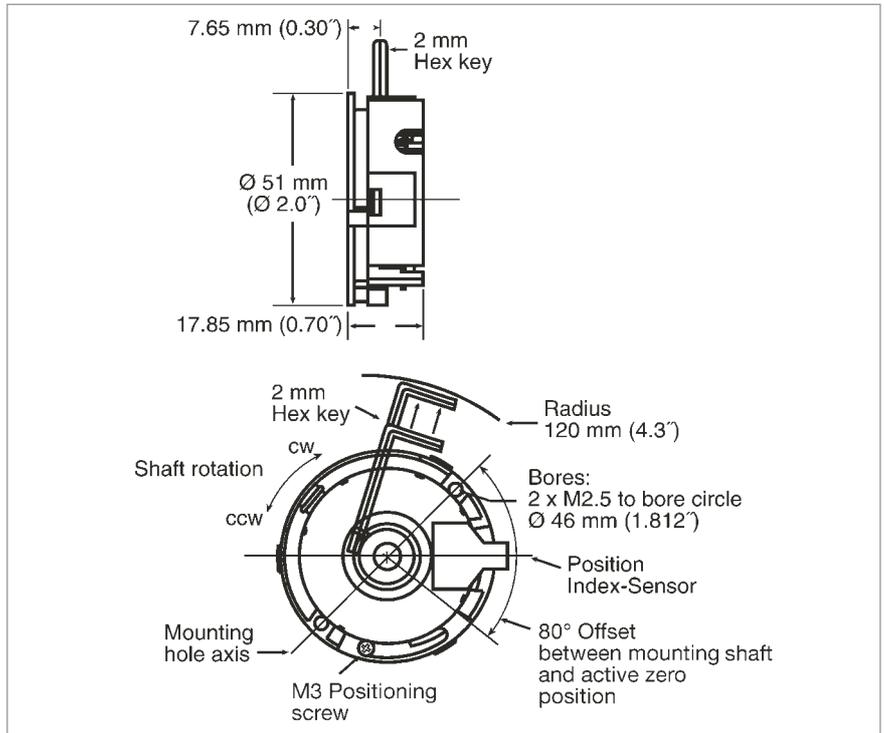

### PULSE DIAGRAM

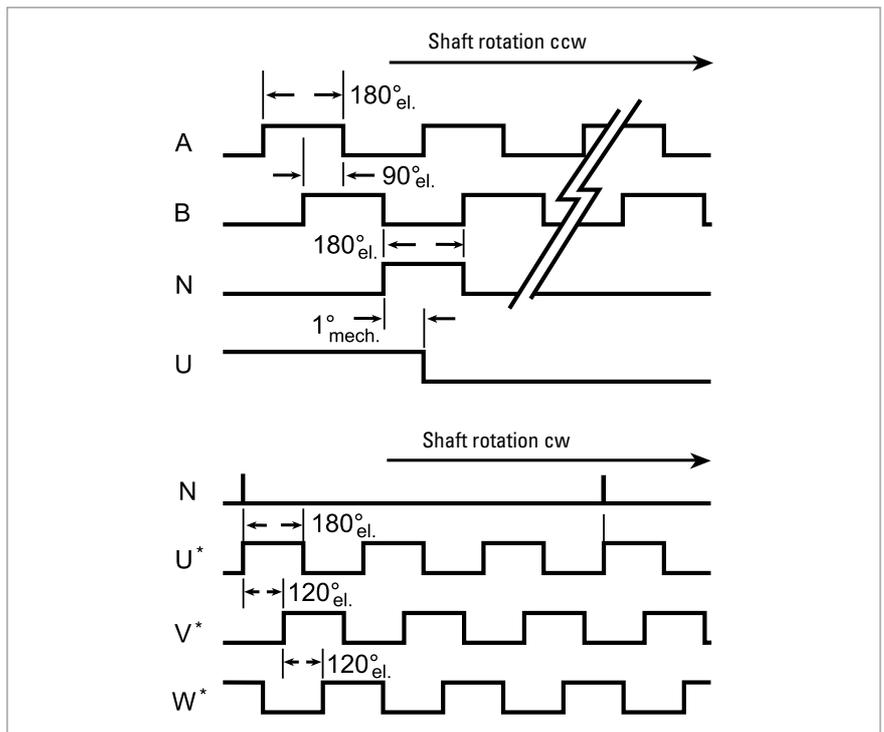

\* Beispiel mit 6-poliger commutation

for AC Synchronous & BLDC Motors

CONNECTION DIAGRAM CABLE

Function	Colour for version incremental only, Code Electrical = 3	Colour for version incremental + commutation, Code Electrical = 6, 7, 9
V <sub>CC com</sub> <sup>1</sup>		red/white <sup>3</sup>
V <sub>CC inc</sub> <sup>1</sup>	red	red
GND inc	black	black
GND com		black/white <sup>3</sup>
$\bar{A}$	red/black	blue/black
A	green	blue
$\bar{B}$	white/black	green/black
B	orange	green
$\bar{N}$	blue	violet/black
N	white	violet
$\bar{U}$ <sup>2</sup>		brown/black
U		brown
$\bar{V}$ <sup>2</sup>		grey/black
V		grey
$\bar{W}$ <sup>2</sup>		white/black
W		white

<sup>1</sup> V<sub>CC com</sub> resp. V<sub>CC inc</sub> = +5 V DC or +12 V DC (see ordering data electrical)

<sup>2</sup> only for output<sub>com</sub> = RS422

<sup>3</sup> not connected for codes 6 and 9, since here U<sub>inc</sub> = U<sub>com</sub>

CONNECTION DIAGRAM  
CONNECTOR


Function	10 pole only incr., NPN-O.C., Code Electr. = 0, 1	10 pole only incr., RS422, Code Electr. = 3	16 pole incr. + commutation, Code Electr. = 6, 7, 9
V <sub>CC com</sub> <sup>1</sup>			1
V <sub>CC inc</sub> <sup>1</sup>	2	2	2
GND inc	3	3	3
GND com			4
$\bar{A}$ <sup>2</sup>		5	5
A	1	1	6
$\bar{B}$ <sup>2</sup>		7	7
B	8	8	8
$\bar{N}$ <sup>2</sup>		9	9
N	10	10	10
$\bar{U}$ <sup>2</sup>			11
U			12
$\bar{V}$ <sup>2</sup>			13
V			14
$\bar{W}$ <sup>2</sup>			15
W			16

<sup>1</sup> V<sub>CC com</sub> resp. V<sub>CC inc</sub> = +5 V DC or +12 V DC (see ordering data electrical)

<sup>2</sup> only for output<sub>inc/com</sub> = RS422

**Pin Numbering:**

For dual row connector with ribbon cable:  
The cable side marked red designates Pin 1

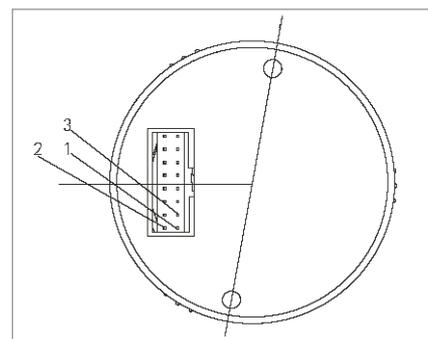

# Motor Feedback Systems Type M 21

## for AC Synchronous & BLDC Motors

### ORDERING INFORMATION


Type	Pulses ppr incremental <sup>4</sup>	Poles commutation <sup>4</sup>	Housing	Electrical <sup>1</sup>	Hub diameter <sup>2</sup>	Connection
□	□ /	□ -	□	□	□	□
<b>M21-</b>	<b>0500</b> <b>0512</b> <b>1000</b> <b>1024</b> <b>2000</b> <b>2048</b>	<b>0</b> without <b>4</b> 4 pole <b>6</b> 6 pole <b>8</b> 8 pole <b>A</b> 10 pole <b>C</b> 12 pole <b>X</b> 16 pole	<b>0</b> without cover <b>1</b> closed cover for blind shaft <b>2</b> cover with bore for through shaft	<b>incremental only without commutation</b> <b>0</b> $U_{inc}=5\text{ V}$ ; output <sub>inc</sub> =NPN-O.C. <b>1</b> $U_{inc}=12\text{ V}$ ; output <sub>inc</sub> =NPN-O.C. <b>3</b> $U_{inc}=5\text{ V}$ ; output <sub>inc</sub> =RS 422 <b>incremental plus commutation signals</b> <b>6</b> $U_{inc}=5\text{ V}$ ; output <sub>inc</sub> =RS 422, $U_{com}=5\text{ V}$ ; output <sub>com</sub> =NPN-O.C. <b>7</b> $U_{inc}=5\text{ V}$ ; output <sub>inc</sub> =RS 422, $U_{com}=12\text{ V}$ ; output <sub>com</sub> =NPN-O.C. <b>9</b> $U_{inc}=5\text{ V}$ ; output <sub>inc</sub> =RS 422, $U_{com}=5\text{ V}$ ; output <sub>com</sub> =RS 422	<b>A</b> 6.35 mm ( $\frac{1}{4}$ "") <b>B</b> 9.52 mm ( $\frac{3}{8}$ "") <b>C</b> 11.11 mm ( $\frac{7}{16}$ "") <b>D</b> 12.7 mm ( $\frac{1}{2}$ "") <b>E</b> 6 mm <b>F</b> 8 mm <b>G</b> 10 mm <b>H</b> 12 mm	<b>0</b> dual row connector <b>1...8</b> dual row connector with mating ribbon cable 1=30 cm, 2=60 cm, ... <b>A...H</b> screened cable <sup>3</sup> radial, A=30 cm, B=60 cm, ...

<sup>1</sup>  $U_{inc}$ : Supply voltage incremental,  
 $U_{com}$ : Supply voltage commutation (only if commutation is selected)  
<sup>2</sup> Exposed hub clamp screw  
<sup>3</sup> only possible with output = RS 422 (Code for Electrical  $\geq 3$ )  
<sup>4</sup> allowed combinations see available combinations (pulses/poles)

### Available combinations (pulses/poles)

Pulses ppr	Number of poles						
	0	4	6	8	10 (=A)	12 (=C)	16 (=X)
0500	X	X	X	X		X	
0512	X			X			
1000	X	X	X	X		X	
1024	X	X	X	X		X	
2000	X	X	X	X		X	
2048	X	X	X	X	X	X	X

for AC Synchronous & BLDC Motors

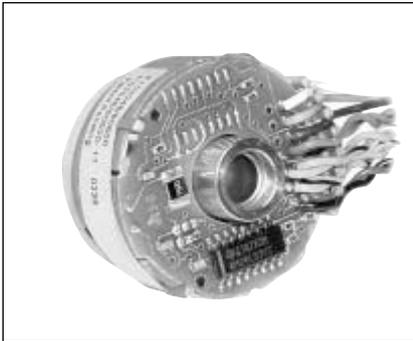

- Compact hollowshaft motor encoder, ideal for BLDC, DC-Servo and Stepper feedback
- Resolver compatible mounting
- Resolution up to 2048 ppr
- Operating temperature up to 120 °C
- Frequency response to 300 kHz
- Mounting depth 22.4 mm

GENERAL INFORMATION

The type F10 encoder provides high performance, cost effective feedback for stepper and servo motor applications. The F10 offers compact package dimensions and flying leads for a low-profile installation. A size 10 servo ring allows easy mounting and replacement of pancake resolvers with high tolerance to motor shaft movement and 360 degrees of adjustment to align the signal outputs to the shaft position.

NUMBER OF PULSES

1024, 2048;  
optional additional 6 or 10 pole commutation signals

TECHNICAL DATA  
mechanical


Weight approx.	45 g
Dimensions	Outside diameter: 31.7 mm max.; Hight: 24.1 mm max.
Material	Housing: cast-aluminium; Servo ring: aluminium; Hub: brass; Disk: 0.76 mm thick glass
Moment of inertia	1.6 gcm <sup>2</sup>
Hollow shaft diameter	6 mm
Hollow shaft balance	+0.001"/-0.000" (+0.025 mm/-0.000 mm)
Radial runout of mating shaft	±0.05 mm max. (includes shaft perpendicularity to mounting surface)
Axial endplay of mating shaft	±0.25 mm max.
Mounting	1.045" (26.54 mm) flexible servo ring (size 10 pancake resolver equivalent)
Acceleration	100 000 rad/s <sup>2</sup> max.
Max. speed	5 000 min <sup>-1</sup> continuous; 12 000 min <sup>-1</sup> peak
Bearing life	[(3.6 x 10 <sup>9</sup> ) / RPM] hours; e.g. 605 000 hours at 6 000 RPM
Operating temperature	0° ... +120 °C
Storage temperature	0° ... +120 °C
Shock resistance	50 g for 6 ms duration
Vibration resistance	2.5 g at 5 to 2 000 Hz
Relative humidity	90 % non-condensing

## for AC Synchronous & BLDC Motors

### TECHNICAL DATA electrical


Code	Incremental with commutation, optical	
Supply voltage	5 V ±10 % DC	
Max. current w/o load	Incremental and commutation: 100 mA max.	
Output circuit		
Incremental	26LS31 differential line driver, 40 mA max.	
Commutation	Open Collector, max. 8 mA; Pull-up 2.0 KΩ or 26LS31 differential line driver, 40 mA max.	
Output signals		
Incremental	RS 422: A, B, N, $\bar{A}$ , $\bar{B}$ , $\bar{N}$	
Commutation (optional):	O.C: U, V, W	RS 422: U, V, W, $\bar{U}$ , $\bar{V}$ , $\bar{W}$
Accuracy		
Incremental signals	+/- 2.5 arc-mins. max. (edge to edge)	
Commutation signals	+/- 6 arc-mins. max.	
Phasing	A leads B by 90° and U leads V leads W by 120°	
Minimum edge separation	A to B is 45°	
Index to U channel	+/- 1° mech. index pulse center to U channel edge (see signal diagram)	
Index pulse width	90° gated A and B high	
Max. output frequency	300kHz	
Connection	Flying leads, ...	

### DIMENSIONAL DRAWINGS

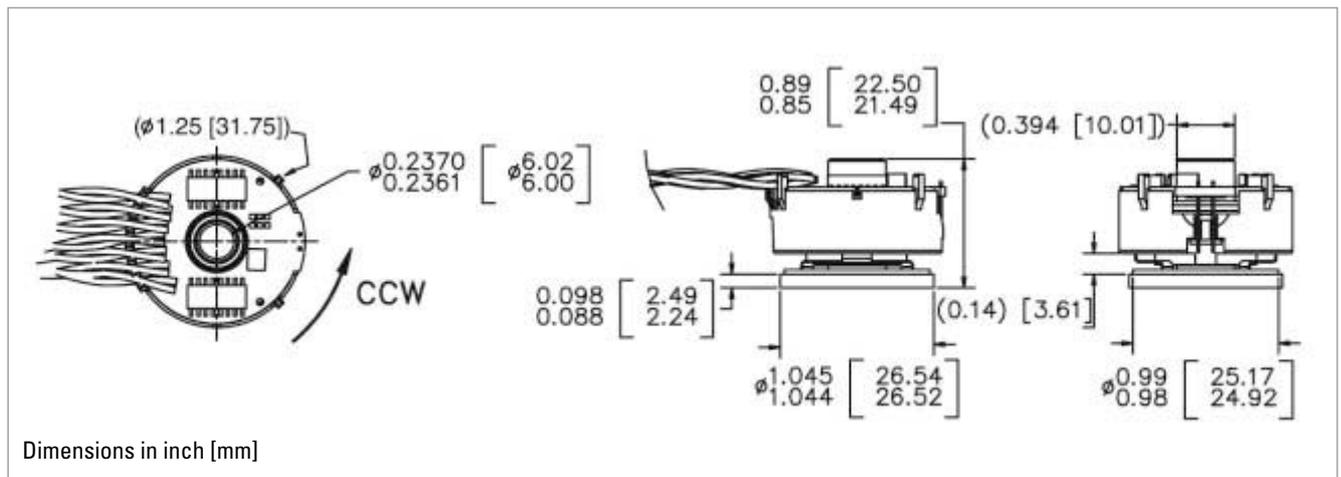

for AC Synchronous & BLDC Motors

SIGNAL DIAGRAM

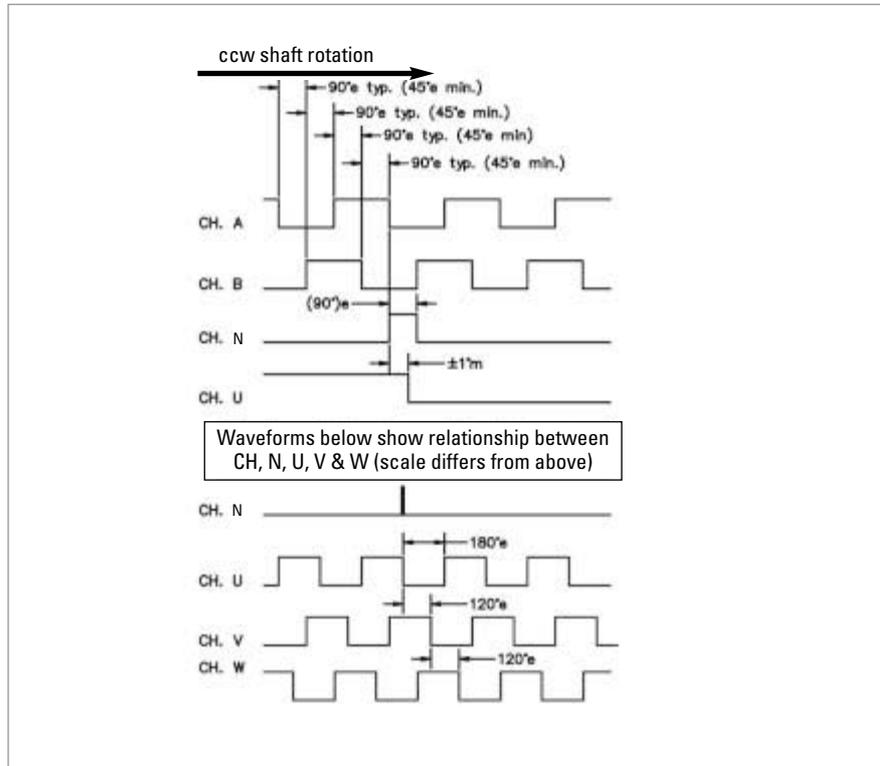

CONNECTION DIAGRAM

Function <sup>1</sup>	Colour
VCC	red
GND	black
$\bar{A}$	blue/black
A	blue
$\bar{B}$	green/black
B	green
$\bar{N}$	violet/black
N	violet
$\bar{U}$	brown/black
U	brown
$\bar{V}$	grey/black
V	grey
$\bar{W}$	white/black
W	white

<sup>1</sup> availability of function depends on version

# Motor Feedback Systems Type F 10

## for AC Synchronous & BLDC Motors

### ORDERING INFORMATION

Type	Pulses ppr incremental <sup>2</sup>	Poles commutation <sup>2</sup>	Mounting	Electrical <sup>1</sup>	Shaft / Bore	Connection
<input type="checkbox"/>	<input type="checkbox"/> / <input type="checkbox"/>	<input type="checkbox"/> -	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>F10-</b>	<b>1 024</b> <b>2 048</b>	<b>0</b> without <b>6</b> 6 pole <b>C</b> 10 pole	<b>0</b> Servo ring size 10	<b>incremental only without commutation</b> <b>3</b> $U_{inc}=5\text{ V}$ ; output <sub>inc</sub> =RS 422 <b>incremental plus commutation signals</b> <b>6</b> $U_{inc}=5\text{ V}$ ; output <sub>inc</sub> =RS 422, $U_{com}=5\text{ V}$ ; output <sub>com</sub> =NPN-O.C. <b>9</b> $U_{inc}=5\text{ V}$ ; output <sub>inc</sub> =RS 422, $U_{com}=5\text{ V}$ ; output <sub>com</sub> =RS 422	<b>4</b> 6 mm through Bore	<b>0</b> 16.5 cm Flying leads
<sup>1</sup> $U_{inc}$ : Supply voltage incremental, $U_{com}$ : Supply voltage commutation (only if commutation is selected) <sup>2</sup> allowed combinations see available combinations (pulses/poles)						

#### Available combinations (pulses/poles)

Pulses ppr	Number of poles		
	0	6	10 (=C)
1024	X	X	X
2048	X	X	X

for AC Synchronous & BLDC Motors



- Compact hollowshaft motor encoder, ideal for BLDC, DC-Servo and Stepper feedback
- Resolver compatible mounting
- Resolution up to 2048 ppr
- Operating temperature up to 120 °C
- Frequency response to 300 kHz
- Mounting depth 22.4 mm

GENERAL INFORMATION

The type F15 encoder provides high performance, cost effective feedback for stepper and servo motor applications. The F15 offers compact package dimensions and flying leads for a low-profile installation. A size 15 servo ring allows easy mounting and replacement of pancake resolvers with high tolerance to motor shaft movement and 360 degrees of adjustment to align the signal outputs to the shaft position.

NUMBER OF PULSES

1024, 2048;  
optional additional 6, 8 or 10 pole commutation signals

TECHNICAL DATA  
mechanical

Weight approx.	45 g
Dimensions	Outside diameter: 36.8 mm max.; Hight: 22.1 mm max.
Material	Housing: cast-aluminium; Servo ring: aluminium; Hub: brass; Disk: 0.76 mm thick glass
Moment of inertia	2.5 gcm <sup>2</sup>
Hollow shaft diameter	9.52 mm
Hollow shaft balance	+0.001"/-0.000" (+0.025 mm/-0.000 mm)
Radial runout of mating shaft	±0.05 mm max. (includes shaft perpendicularity to mounting surface)
Axial endplay of mating shaft	±0.25 mm max.
Mounting	1.450" (36.83 mm) flexible servo ring (size 15 pancake resolver equivalent)
Acceleration	100 000 rad/s <sup>2</sup> max.
Max. speed	5 000 min <sup>-1</sup> continuous; 12 000 min <sup>-1</sup> peak
Bearing life	[(3.6 x 10 <sup>9</sup> ) / RPM] hours; e.g. 605 000 hours at 6 000 RPM
Operating temperature	0° ... +120 °C
Storage temperature	0° ... +120 °C
Shock resistance	50 g for 6 ms duration
Vibration resistance	2.5 g at 5 to 2 000 Hz
Relative humidity	90 % non-condensing


# Motor Feedback Systems Type F 15

## for AC Synchronous & BLDC Motors

### TECHNICAL DATA electrical


Code	Incremental with commutation, optical	
Supply voltage	5 V ±10 % DC	
Max. current w/o load	Incremental and commutation: 100 mA max.	
Output circuit	26LS31 differential line driver, 40 mA max.	
Incremental	Open Collector, max. 8 mA; Pull-up 2.0 KΩ	
Commutation	or 26LS31 differential line driver, 40 mA max.	
Output signals		
Incremental	RS 422: A, B, N, $\bar{A}$ , $\bar{B}$ , $\bar{N}$	
Commutation (optional):	O.C: U, V, W	RS 422: U, V, W, $\bar{U}$ , $\bar{V}$ , $\bar{W}$
Tolerance		
Incremental signals	+/- 2.5 arc-mins. max. (edge to any edge)	
Commutation signals	+/- 6 arc-mins. max.	
Phasing	A leads B by 90° and U leads V leads W by 120°	
Minimum edge separation	A to B is 45°	
Index to U channel	+/- 1° mech. index pulse center to U channel edge (see signal diagram)	
Index pulse width	90° gated A and B high	
Max. output frequency	300kHz, max.	
Connection	Flying leads, ...	

### DIMENSIONAL DRAWINGS

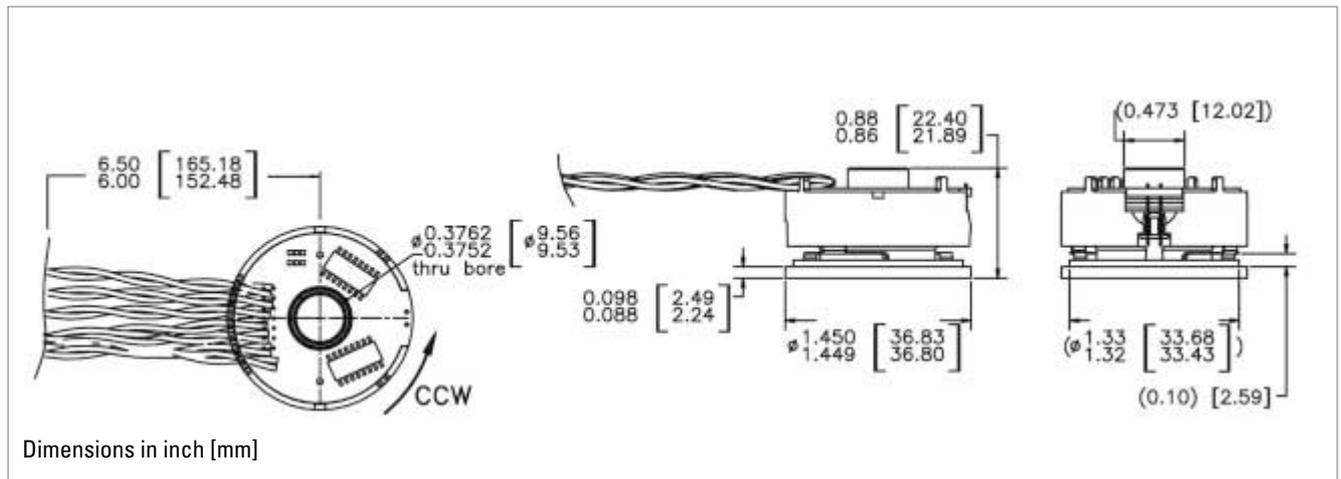

for AC Synchronous & BLDC Motors

SIGNAL DIAGRAM

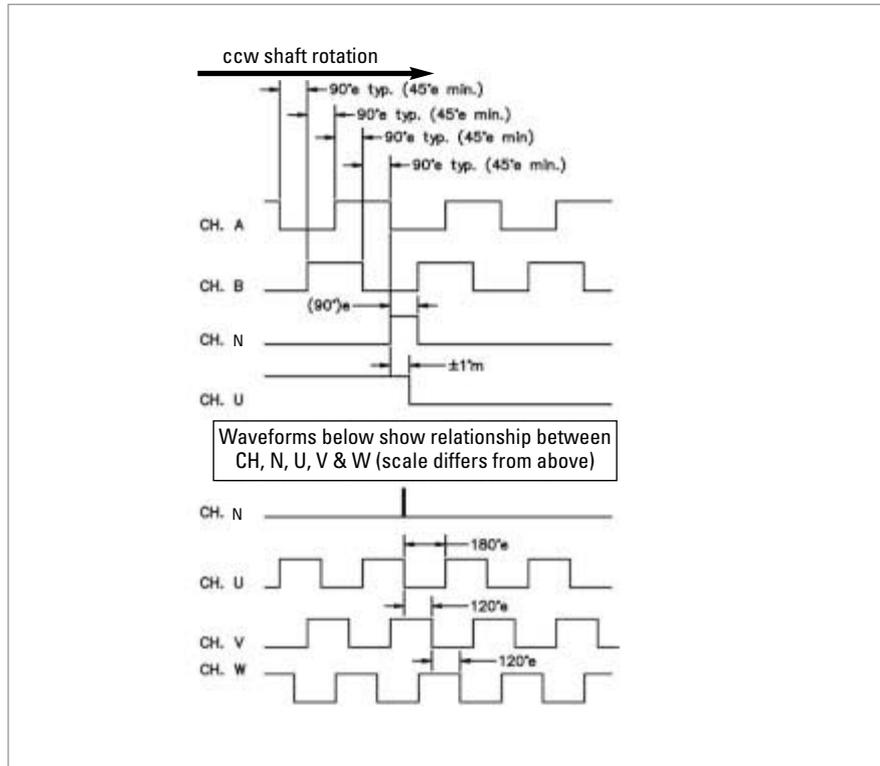

CONNECTION DIAGRAM

Function <sup>1</sup>	Colour
VCC	red
GND	black
$\bar{A}$	blue/black
A	blue
$\bar{B}$	green/black
B	green
$\bar{N}$	violet/black
N	violet
$\bar{U}$	brown/black
U	brown
$\bar{V}$	grey/black
V	grey
$\bar{W}$	white/black
W	white

<sup>1</sup> availability of function depends on version

# Motor Feedback Systems Type F 15

## for AC Synchronous & BLDC Motors

### ORDERING INFORMATION

Type	Pulses ppr incremental <sup>2</sup>	Poles commutation <sup>2</sup>	Mounting	Electrical <sup>1</sup>	Shaft / Bore	Connection
<input type="checkbox"/>	<input type="checkbox"/> /	<input type="checkbox"/> -	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>F15-</b>	<b>1 024</b> <b>2 048</b>	<b>0</b> without <b>6</b> 6 pole <b>8</b> 8 pole <b>C</b> 10 pole	<b>0</b> Servo ring size 15	<b>incremental only without commutation</b> <b>3</b> $U_{inc}=5\text{ V}$ ; output <sub>inc</sub> =RS 422 <b>incremental plus commutation signals</b> <b>6</b> $U_{inc}=5\text{ V}$ ; output <sub>inc</sub> =RS 422, $U_{com}=5\text{ V}$ ; output <sub>com</sub> =NPN-O.C. <b>9</b> $U_{inc}=5\text{ V}$ ; output <sub>inc</sub> =RS 422, $U_{com}=5\text{ V}$ ; output <sub>com</sub> =RS 422	<b>1</b> 9.52 mm through bore	<b>0</b> 16.5 cm Flying leads
<sup>1</sup> $U_{inc}$ : Supply voltage incremental, $U_{com}$ : Supply voltage commutation (only if commutation is selected) <sup>2</sup> allowed combinations see available combinations (pulses/poles)						

#### Available combinations (pulses/poles)

Pulses ppr	Number of poles			
	0	6	8	10 (=C)
1024	X	X	X	X
2048	X	X	X	X

for AC Synchronous & BLDC Motors



- Compact hollowshaft motor encoder, ideal for BLDC, DC-Servo and Stepper feedback
- Resolver compatible mounting
- Resolution up to 2048 ppr
- Operating temperature up to 120 °C
- Frequency response to 300 kHz
- Mounting depth 22.4 mm

GENERAL INFORMATION

The type F21 encoder provides high performance, cost effective feedback for stepper and servo motor applications. The F21 offers compact package dimensions and flying leads for a low-profile installation. A size 21 servo ring allows easy mounting and replacement of pancake resolvers with high tolerance to motor shaft movement and 360 degrees of adjustment to align the signal outputs to the shaft position.

NUMBER OF PULSES

1024, 2048;  
optional additional 6, 8, 10, 12 or 16 pole commutation signals

TECHNICAL DATA  
mechanical


Weight approx.	90 g
Dimensions	Outside diameter: 52.4 mm max.; Hight: 25.7 mm max.
Material	Housing: cast-aluminium; Servo ring: aluminium; Hub: brass; Disk: 0.76 mm thick glass
Moment of inertia	2.5 gcm <sup>2</sup>
Hollow shaft diameter	12.7 mm
Hollow shaft balance	+0.001"/-0.000" (+0.025 mm/-0.000 mm)
Radial runout of mating shaft	±0.05 mm max. (includes shaft perpendicularity to mounting surface)
Axial endplay of mating shaft	±0.25 mm max.
Mounting	2.062" (52.4 mm) flexible servo ring (size 21 pancake resolver equivalent)
Acceleration	100 000 rad/s <sup>2</sup> max.
Max. speed	5 000 min <sup>-1</sup> continuous; 12 000 min <sup>-1</sup> peak
Bearing life	[(3.6 x 10 <sup>9</sup> ) / RPM] hours; e.g. 605 000 hours at 6 000 RPM
Operating temperature	0° ... +120 °C
Storage temperature	0° ... +120 °C
Shock resistance	50 g for 6 ms duration
Vibration resistance	2.5 g at 5 to 2 000 Hz
Relative humidity	90 % non-condensing

## for AC Synchronous & BLDC Motors

### TECHNICAL DATA electrical


Code	Incremental with commutation, optical	
Supply voltage	5 V ±10 % DC	
Max. current w/o load	Incremental and commutation: 100 mA max.	
Output circuit	26LS31 differential line driver, 40 mA max.	
Incremental	Open Collector, max. 8 mA; Pull-up 2.0 KΩ	
Commutation	or 26LS31 differential line driver, 40 mA max.	
Output signals		
Incremental		RS 422: A, B, N, $\bar{A}$ , $\bar{B}$ , $\bar{N}$
Commutation (optional):	O.C: U, V, W	RS 422: U, V, W, $\bar{U}$ , $\bar{V}$ , $\bar{W}$
Accuracy		
Incremental signals	+/- 2.5 arc-mins. max. (edge to any edge)	
Commutation signals	+/- 6 arc-mins. max.	
Phasing	A leads B by 90° and U leads V leads W by 120°	
Minimum edge separation	A to B is 45°	
Index to U channel	+/- 1° mech. index pulse center to U channel edge (see signal diagram)	
Index pulse width	90° gated A and B high	
Max. output frequency	300kHz, max.	
Connection	Flying leads, ...	

### DIMENSIONAL DRAWINGS

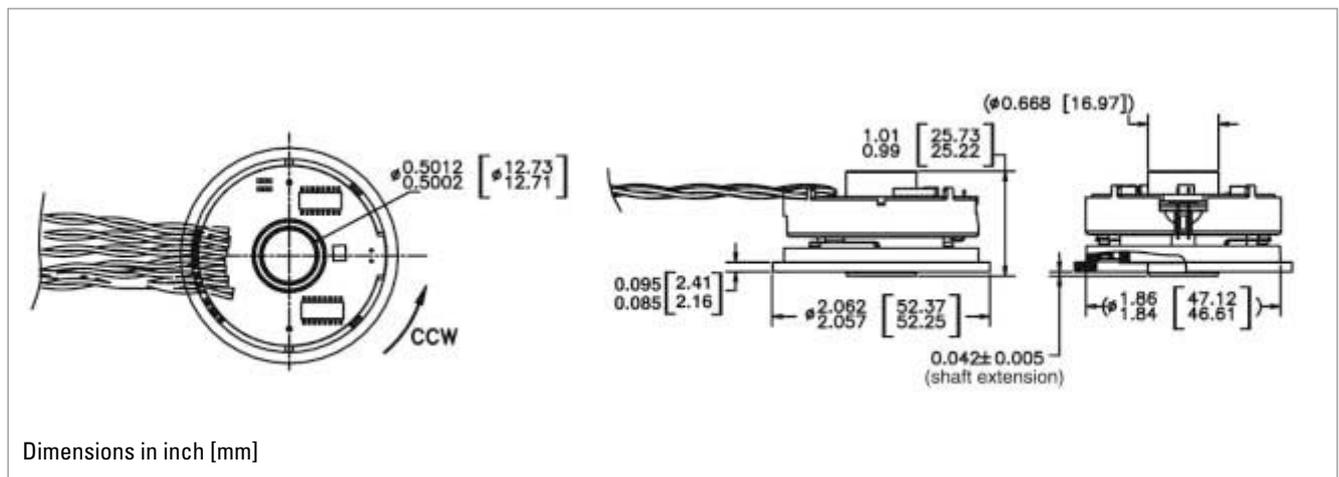

for AC Synchronous & BLDC Motors

SIGNAL DIAGRAM

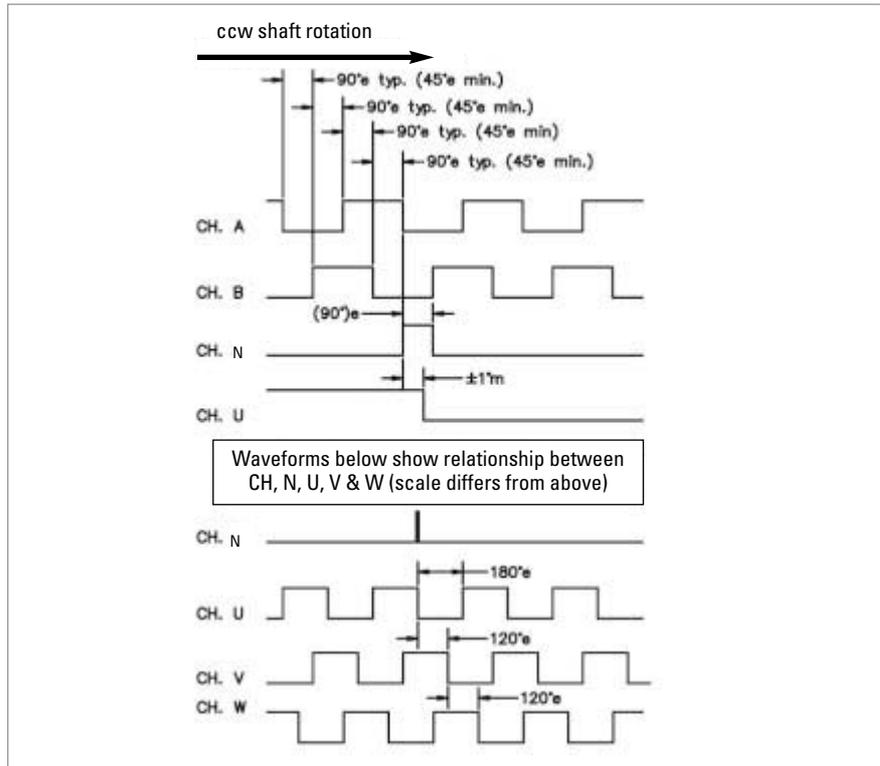

CONNECTION DIAGRAM

Function <sup>1</sup>	Colour
VCC	red
GND	black
$\bar{A}$	blue/black
A	blue
$\bar{B}$	green/black
B	green
$\bar{N}$	violet/black
N	violet
$\bar{U}$	brown/black
U	brown
$\bar{V}$	grey/black
V	grey
$\bar{W}$	white/black
W	white

<sup>1</sup> availability of function depends on version

# Motor Feedback Systems Type F 21

## for AC Synchronous & BLDC Motors

### ORDERING INFORMATION

Type	Pulses ppr incremental <sup>2</sup>	Poles commutation <sup>2</sup>	Mounting	Electrical <sup>1</sup>	Shaft / Bore	Connection
<input type="checkbox"/>	<input type="checkbox"/> / <input type="checkbox"/>	<input type="checkbox"/> -	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>F21-</b>	<b>1 024</b> <b>2 048</b>	<b>0</b> without <b>6</b> 6 pole <b>8</b> 8 pole <b>C</b> 10 pole <b>E</b> 12 pole <b>I</b> 16 pole	<b>0</b> Servo ring size 21	<b>incremental only without commutation</b> <b>3</b> $U_{inc}=5\text{ V}$ ; output <sub>inc</sub> =RS 422 <b>incremental plus commutation signals</b> <b>6</b> $U_{inc}=5\text{ V}$ ; output <sub>inc</sub> =RS 422, $U_{com}=5\text{ V}$ ; output <sub>com</sub> =NPN-O.C. <b>9</b> $U_{inc}=5\text{ V}$ ; output <sub>inc</sub> =RS 422, $U_{com}=5\text{ V}$ ; output <sub>com</sub> =RS 422	<b>3</b> 12.7 mm through bore	<b>0</b> 16.5 cm offene Litzen
<sup>1</sup> $U_{inc}$ : Supply voltage incremental, $U_{com}$ : Supply voltage commutation (only if commutation is selected) <sup>2</sup> allowed combinations see available combinations (pulses/poles)						

#### Available combinations (pulses/poles)

Pulses ppr	Number of poles					
	0	6	8	10 (=C)	12 (=E)	16 (=I)
1024	X	X	X	X	X	X
2048	X	X	X	X	X	X

for AC Synchronous & BLDC Motors



- Compact hollowshaft motor encoder, ideal for BLDC, DC-Servo and Stepper feedback
- Incremental & commutation
- Phased Array Technology
- Up to 5000 ppr
- Frequency response to 500 kHz
- Operating temperature up to 120°C
- Trough hollow shaft up to diameter 8 mm
- Stator coupling
- External diameter 40 mm
- Cable plug-in radial/axial

GENERAL INFORMATION

The type F14 offers compact package dimensions and a pluggable pin header. A compliant tether allows easy mounting with high tolerance to motor shaft movement and 30 degrees of adjustment to align the signal outputs to the shaft position.

A superior optical configuration allows for generous internal component clearance eliminating potential damage at high ambient operating temperatures. High temperature rated grease is standard for extended bearing life. No special tools are required for installation.

The use of optically-generated signals for Brushless DC (BLDC) servo control provides higher accuracy and reliability by eliminating the hysteresis found in competitive units with hall effect sensors, ensuring maximum performance and reliability of the servo system.

NUMBER OF PULSES

200, 400, 500, 1000, 1024, 2000, 2048, 2500, 4096, 5000;  
optional additional 4, 6, 8 or 10 pole commutation signals

TECHNICAL DATA  
mechanical


Shaft	Through hollow shaft
Shaft diameter	6.8 mm; 1/4"
Shaft tolerance	+0.025 / -0.000 mm
Moment of inertia	5.8 gcm <sup>2</sup>
Axial endplay of mating shaft	±1.5 mm
Radial runout of mating shaft	0.05 mm (includes shaft perpendicularity)
Max. speed	(Frequency / ppr) x 60 or 12 000 min <sup>-1</sup> , whichever is less
Bearing life	(1.4 x 10 <sup>9</sup> ) / RPM [hours] e.g. 230 000 hours at 6 000 RPM
Protection class	IP 40 (with cover)
Operating temperature	0 ... +120 °C
Storage temperature	-40 ... +120 °C
Shock resistance	1000 m/s <sup>2</sup> (11 ms)
Vibration resistance	25 m/s <sup>2</sup> (5...2000 Hz)
Material housing	Aluminium

for AC Synchronous & BLDC Motors

TECHNICAL DATA  
electrical


Supply voltage	5 V ±10%
Max current w/o load	Max. 150 mA (incremental) Max. 175 mA (incremental +commutation)
Incremental signals	A, B
Resolution	Max. 5000 ppr (see ordering information)
Accuracy	Incremental 2' (2 edges to any edges)
Phasing A to B	A leads B by 90° cw (view on mounting shaft)
Phasing tolerance A to B	±45°
Max. output frequency	250 kHz up to 1024 ppr 500 kHz > 1024 ppr
Signal level	TTL differential (RS422)
Output current	RS 422 ±40 mA (ET7272) NPN O.C. -16 mA (2kΩ int. pull up)
Commutation	U, V, W
Signal shape	trapezoid commutation
Phasing	U leads V leads W by 120°
Tolerance N to U	±1° mech. index pulse center to U channel edge (see signal diagram)
Connection	16 pins double row header, axial or radial Mating connector with 28 AWG cable available
Reference signal	N
Index pulse width	90° (A gated B)

DIMENSIONAL DRAWINGS

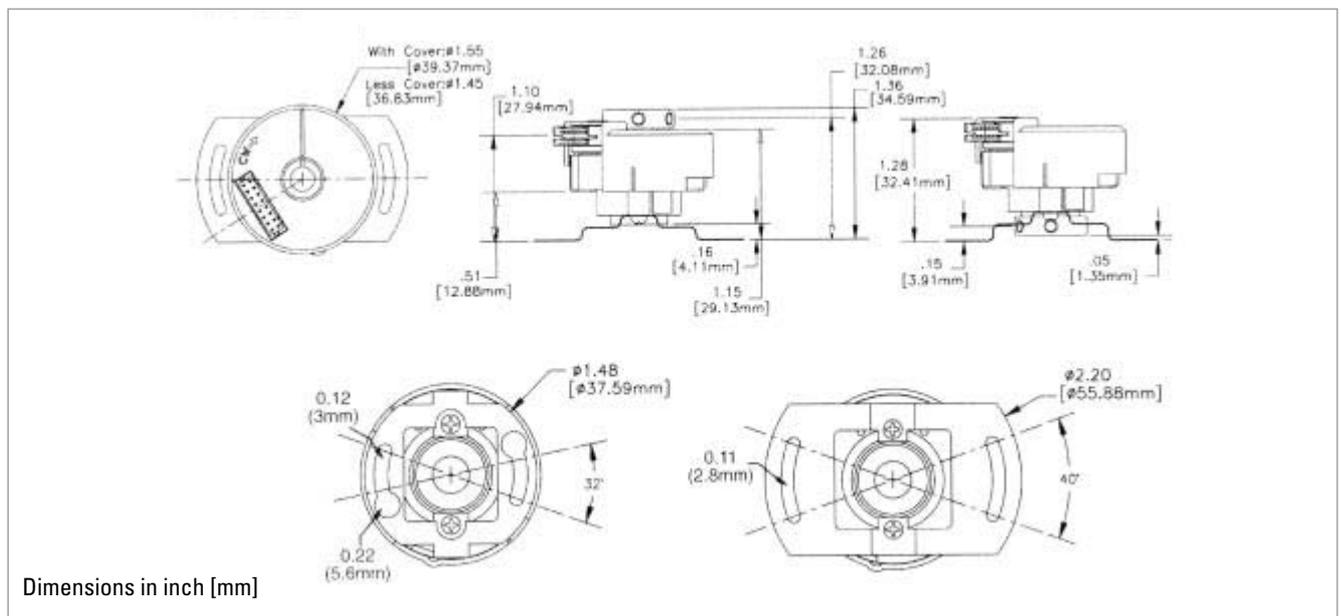


for AC Synchronous & BLDC Motors

SIGNAL DIAGRAM

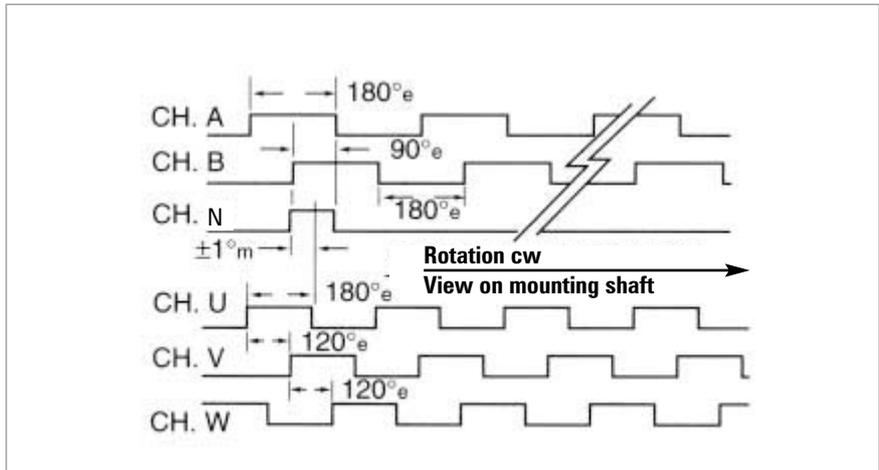

CONNECTION

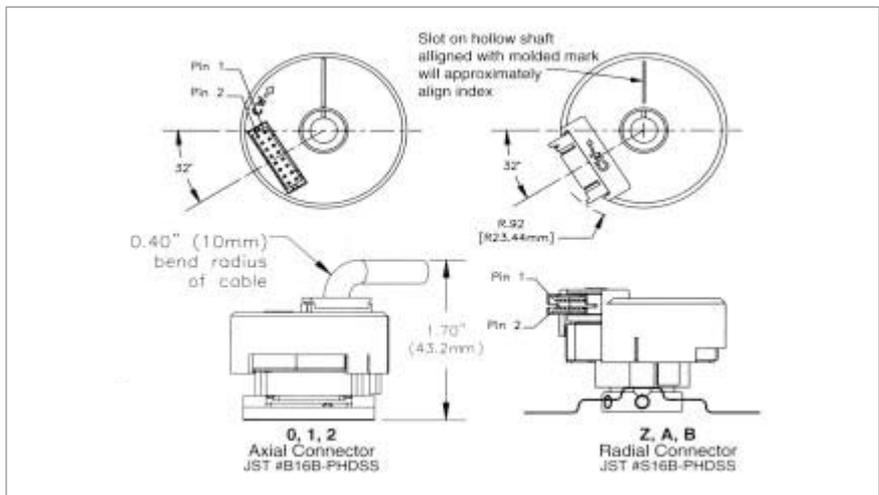

CONNECTION DIAGRAM

Pin	Function <sup>1</sup>	Colour
1	VCC	red
2	U	brown
3	GND	black
4	V	grey
5	A	blue
6	W	white
7	$\bar{A}$	blue/black
8	-	-
9	B	green
10	$\bar{U}$	brown/black
11	$\bar{B}$	green/black
12	$\bar{V}$	grey/black
13	N	violet
14	$\bar{W}$	white/black
15	$\bar{N}$	violet/black
16	-	-

<sup>1</sup> Availability of function depends on version

# Motor Feedback Systems Type F 14

## for AC Synchronous & BLDC Motors

### ORDERING INFORMATION

Type	Pulses ppr incremental <sup>2</sup>	Poles commutation <sup>2</sup>	Mounting	Electrical <sup>1</sup>	Shaft	Connection <sup>3</sup>
<input type="checkbox"/>	<input type="checkbox"/> /	<input type="checkbox"/> -	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>F14</b>	<b>0200</b> <b>0400</b> <b>0500</b> <b>1000</b> <b>1024</b> <b>2000</b> <b>2048</b> <b>2500</b> <b>4096</b> <b>5000</b>	<b>0</b> without <b>4</b> 4 pole <b>6</b> 6 pole <b>8</b> 8 pole <b>A</b> 10 pole	tether <b>0</b> without tether <b>1</b> 1.181 " (30 mm) <b>3</b> 1.811 " (46 mm)	<b>incremental only,</b> <b>&lt; 2048/0 (ppr/poles)</b> <b>0</b> U <sub>inc</sub> =5 V; output <sub>inc</sub> =NPN-O.C. <b>incremental only</b> <b>without commutation</b> <b>3</b> U <sub>inc</sub> =5 V; output <sub>inc</sub> =RS 422 <b>incremental plus</b> <b>commutation signals</b> <b>6</b> U <sub>inc</sub> =5 V; output <sub>inc</sub> =RS 422, U <sub>com</sub> =5 V; output <sub>com</sub> =NPN-O.C. <b>7</b> U <sub>inc</sub> =5 V; output <sub>inc</sub> =RS 422, U <sub>com</sub> =12 V; output <sub>com</sub> =NPN-O.C.	Clamping ring front <b>0</b> 1/4" <b>4</b> 6 mm <b>5</b> 8 mm Clamping ring rear <b>A</b> 1/4" <b>E</b> 6 mm <b>F</b> 8 mm	Axial plug <b>0</b> without cable <b>1</b> 30 cm cable <b>2</b> 60 cm cable Radial plug <b>Z</b> without cable <b>A</b> 30 cm cable <b>B</b> 60 cm cable
<sup>1</sup> U <sub>inc</sub> : Supply voltage incremental, U <sub>com</sub> : Supply voltage commutation (only if commutation is selected) <sup>2</sup> allowed combinations see available combinations (pulses/poles) <sup>3</sup> Other lengths in multiples of 30 cm, e.g. 90 cm = 3 / 90 cm = C etc.						

### Available combinations (pulses/poles)

Pulses ppr	Number of poles				
	0	4	6	8	10 (=A)
0200	X				
0400	X	X	X	X	X
0500	X	X	X	X	X
1000	X	X	X	X	X
1024	X	X	X	X	X
2000	X	X	X	X	X
2048	X	X	X	X	X
2500	X	X	X	X	X
4096	X	X	X	X	X
5000	X	X	X	X	X

for AC Synchronous & BLDC Motors



- Compact hollowshaft motor encoder, ideal for BLDC, DC-Servo and Stepper feedback
- Incremental & commutation
- Phased Array Technology
- Up to 10 000 ppr
- Frequency response to 500 kHz
- Operating temperature up to 120°C
- Trough hollow shaft up to diameter 12.7 mm
- Stator coupling
- External diameter 50 mm
- Cable plug-in radial/axial

GENERAL INFORMATION

The type F18 encoder provides high performance, cost effective feedback for stepper and servo motor controls. The F18 offers compact package dimensions and a pluggable pin header. A compliant tether allows easy mounting with high tolerance to motor shaft movement and 30 degrees of adjustment to align the signal outputs to the shaft position.

A superior optical configuration allows for generous internal component clearance eliminating potential damage at high ambient operating temperatures. High temperature rated grease is standard for extended bearing life. No special tools are required for installation.

The use of optically-generated signals for Brushless DC (BLDC) servo control provides higher accuracy and reliability by eliminating the hysteresis found in competitive units with hall effect sensors, ensuring maximum performance and reliability of the servo system.

NUMBER OF PULSES

500, 512, 1000, 1024, 2000, 2048, 2500, 4096, 5000, 8192, 10 000;  
optional additional 4, 6, 8, 10, 12 or 16 pole commutation signals

TECHNICAL DATA  
mechanical

Shaft	Through hollow shaft
Shaft diameter	6, 8, 10, 12 mm; 1/4", 3/8", 7/16", 1/2"
Shaft tolerance	+0.025 / -0.000 mm
Moment of inertia	37.3 gcm <sup>2</sup>
Axial endplay of mating shaft	±1.5 mm
Radial runout of mating shaft	0.05 mm (includes shaft perpendicularity)
Max. speed	(Frequency / ppr) x 60 or 12 000 min <sup>-1</sup> , whichever is less
Bearing life	(3.6 x 10 <sup>9</sup> ) / min <sup>-1</sup> [hours] e.g. 605 000 hours at 6 000 min <sup>-1</sup>
Protection class	IP 40 (with cover)
Operating temperature	0 ... +120 °C
Storage temperature	-40 ... +120 °C
Shock resistance	1000 m/s <sup>2</sup> (11 ms)
Vibration resistance	25 m/s <sup>2</sup> (5...2 000 Hz)
Material housing	Aluminium


# Motor Feedback Systems Type F 18

## for AC Synchronous & BLDC Motors

### TECHNICAL DATA electrical


Supply voltage	5 V $\pm$ 10%
Max current w/o load	Max. 150 mA (incremental) Max. 175 mA (incremental +commutation)
Incremental signals	A, B
Resolution	Max. 10 000 ppr (see ordering information)
Accuracy	Incremental 2' (2 edges to any edges)
Phasing A to B	A leads B by 90° ccw (view on mounting shaft)
Phasing tolerance A to B	$\pm$ 45°
Max. output frequency	250 kHz up to 1 024 ppr 500 kHz > 1 024 ppr
Signal level	TTL differential (RS422)
Output current	RS 422 $\pm$ 40 mA (ET7272) NPN O.C. -16 mA (2k $\Omega$ int. pull up)
Commutation	U, V, W
Signal shape	trapezoid commutation
Phasing	U leads V leads W by 120°
Tolerance N to U	$\pm$ 1° mech. index pulse center to U channel edge (see signal diagram)
Connection	16 pins double row pin header, axial or radial Mating connector with 28 AWG cable available
Reference signal	N
Index pulse width	90° (A gated B)

### DIMENSIONAL DRAWINGS

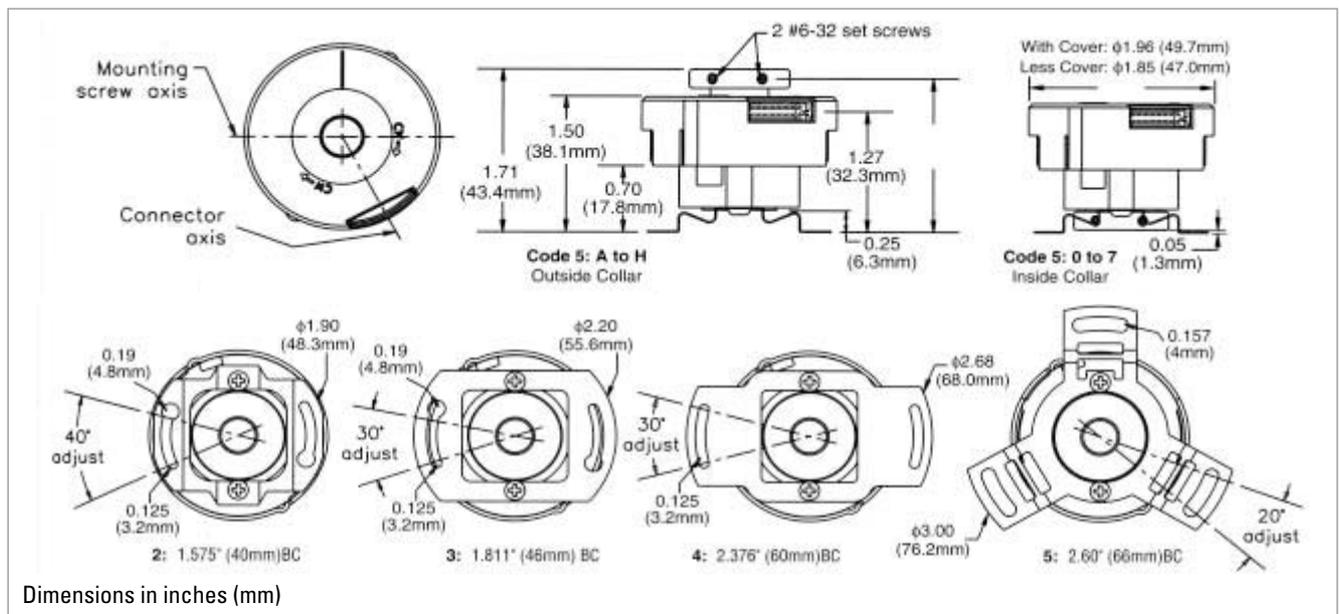


for AC Synchronous & BLDC Motors

SIGNAL DIAGRAM

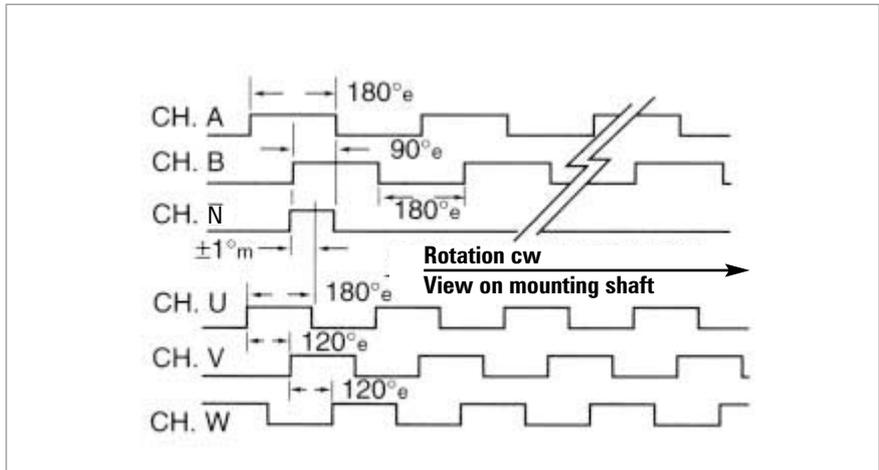

CONNECTION

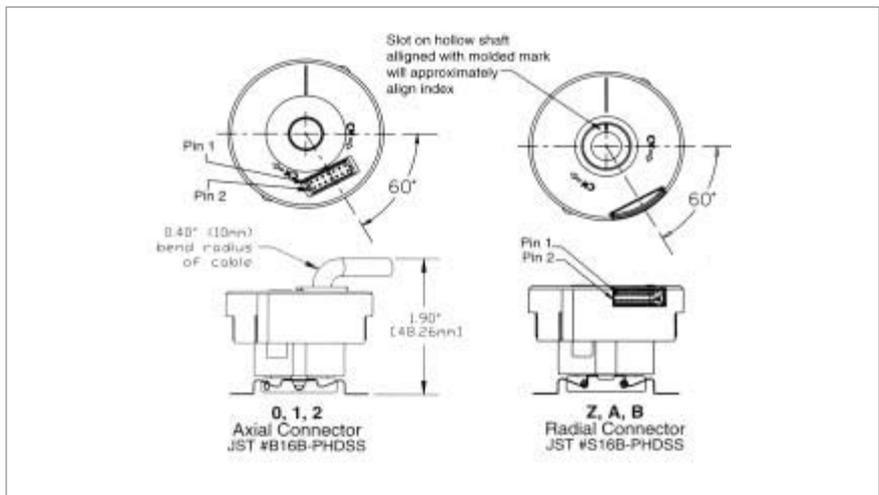

CONNECTION DIAGRAM

Pin	Function <sup>1</sup>	Colour
1	VCC	red
2	U	brown
3	GND	black
4	V	grey
5	A	blue
6	W	white
7	$\bar{A}$	blue/black
8	-	-
9	B	green
10	$\bar{U}$	brown/black
11	$\bar{B}$	green/black
12	$\bar{V}$	grey/black
13	N	violet
14	$\bar{W}$	white/black
15	$\bar{N}$	violet/black
16	-	-

<sup>1</sup> Availability of function depends on version

# Motor Feedback Systems Type F 18

## for AC Synchronous & BLDC Motors

### ORDERING INFORMATION

Type	Pulses ppr incremental <sup>2</sup>	Poles commutation <sup>2</sup>	Mounting	Electrical <sup>1</sup>	Shaft	Connection <sup>3</sup>
□	□ /	□ -	□	□	□	□
<b>F18</b>	<b>0500</b> <b>0512</b> <b>1000</b> <b>1024</b> <b>2000</b> <b>2048</b> <b>2500</b> <b>4096</b> <b>5000</b> <b>8192</b> <b>10E3 = 10 000</b>	<b>0</b> without <b>4</b> 4 pole <b>6</b> 6 pole <b>8</b> 8 pole <b>A</b> 10 pole <b>C</b> 12 pole <b>G</b> 16 pole	tether <b>0</b> without tether <b>2</b> 1.575" (40 mm) TK <b>3</b> 1.811" (46 mm) TK <b>4</b> 2.376" (60 mm) TK <b>5</b> 2.60" (66 mm) TK	<b>incremental only, &lt; 2048/0 (ppr/poles)</b> <b>0</b> U <sub>inc</sub> =5 V; output <sub>inc</sub> =NPN-O.C. <b>incremental only without commutation</b> <b>3</b> U <sub>inc</sub> =5 V; output <sub>inc</sub> =RS 422 <b>incremental plus commutation signals</b> <b>6</b> U <sub>inc</sub> =5 V; output <sub>inc</sub> =RS 422, U <sub>com</sub> =5 V; output <sub>com</sub> =NPN-O.C. <b>7</b> U <sub>inc</sub> =5 V; output <sub>inc</sub> =RS 422, U <sub>com</sub> =12 V; output <sub>com</sub> =NPN-O.C.	Clamping ring front <b>0</b> 1/4" <b>4</b> 6 mm <b>1</b> 3/8" <b>5</b> 8 mm <b>2</b> 7/16" <b>6</b> 10 mm <b>3</b> 1/2" <b>7</b> 12 mm Clamping ring rear <b>A</b> 1/4" <b>E</b> 6 mm <b>B</b> 3/8" <b>F</b> 8 mm <b>C</b> 7/16" <b>G</b> 10 mm <b>D</b> 1/2" <b>H</b> 12 mm	Axial plug <b>0</b> without cable <b>1</b> 30 cm cable <b>2</b> 60 cm cable Radial plug <b>Z</b> without cable <b>A</b> 30 cm cable <b>B</b> 60 cm cable
<sup>1</sup> U <sub>inc</sub> : Supply voltage incremental, U <sub>com</sub> : Supply voltage commutation (only if commutation is selected) <sup>2</sup> allowed combinations see available combinations (pulses/poles) <sup>3</sup> Other lengths in multiples of 30 cm, e.g. 90 cm = 3 / 90 cm = C etc.						

### Available combinations (pulses/poles)

Pulses ppr	Number of poles						
	0	4	6	8	10 (=A)	12 (=C)	16 (=X)
0500	X	X	X	X	X	X	
0512	X	X	X	X			
1000	X	X	X	X	X	X	
1024	X	X	X	X		X	
2000	X	X	X	X	X	X	
2048	X	X	X	X	X	X	X
2500	X	X	X	X	X	X	
4096	X	X	X	X	X	X	X
5000	X	X	X	X	X	X	
8129	X	X	X	X	X	X	X
10E3 = 10 000	X	X	X	X	X	X	

PRELIMINARY



## GENERAL INFORMATION

# Absolute Motor Feedback Systems Type AD 36 for AC Synchronous & BLDC Motors

- For brushless servo motors
- Resolver size 15 compatible
- Through hollow shaft 8 mm
- 19 Bit Singleturn + 12 Bit Multiturn
- + 120°C operating temperature
- 10.000 rpm continuous operation
- Geared optical multiturn
- SSI or BiSS interface
- Sinewave 1 Vpp
- Bandwidth 500kHz

The AD36 is an absolute encoder with a true geared Multiturn, optical sensing technology and 36 mm diameter. Unique is the through hollow shaft which enables an assembly that is compatible with resolver size 15. The mechanical design consists of two ball bearings and a flexible torque support. The AD36 complements the *ACURO-DRIVE* series and is appropriate for use within BLDC servo motors with small frame sizes.

### Fully digital control loop

The new and completely digital OptoASIC technology enables the transition to a truly digital drive system. The conventional absolute encoders still have analog sine wave signals for the feedback of speed and position data. The AD36, however, provides fully digital position data up to 19 Bit (Singleturn) and 12 Bit (Multiturn) over the **BiSS** interface with a variable clock rate up to 10 MHz. **BiSS** is the only open high speed bidirectional sensor interface available on the market.

Backward compatibility to most of the existing drives is realized through the variant with SSI interface together with 2048 sine – cosine periods per revolution.

### Integrated diagnostic system

The AD36 has an integrated diagnostic system that controls and regulates the internal signals. Maximum motor uptime is achieved through the pre warning in case of any system error or aging effects well before they affect the function of the encoder. A code plausibility check guarantees that the output data represents always the true position. Also the operating temperature can be measured and read out with 8 bit resolution. If programmable limits are exceeded or under run this is indicated over warn and alarm bits.

## TECHNICAL DATA mechanical

Housing diameter	37,5 mm
Shaft diameter	8 mm
Protection class housing	IP 40
Protection class shaft	IP 40
Max. speed	Continuous operation 10 000 min <sup>-1</sup> Short term operation 12 000 min <sup>-1</sup>
Torque	0,01 Nm
Moment of inertia	25 gcm <sup>2</sup>
Spring tether (hollow shaft)	
Tolerance axial	± 0,5 mm
Tolerance radial	± 0,05 mm
Vibration resistance (IEC 68-2-6)	100 m/ s <sup>2</sup> (10 - 500 Hz)
Shock resistance (IEC 68-2-27)	1000 m/ s <sup>2</sup> (6 ms)
Operating temperature	-15 ...+120°C
Storage temperature	-15 ...+85°C
Material shaft/ housing	Aluminum
Weight ST/ MT	80 g/ 130 g


# Absolute Motor Feedback Systems Type AD 36 for AC Synchronous & BLDC Motors

## TECHNICAL DATA electrical

Supply voltage	DC 5 V (−5 %/ +10 %) or DC 10-30 V
Current consumption ST/ MT	50 mA/ 100 mA
Lines/ Drives	Clock and Data/ RS422
Output code	Gray
Resolution Singleturn	SSI: 13 Bit Biss: 19 Bit
Incremental signals	Sine - Cosine 1 Vss
No. of increments	2048
3 dB limiting frequency	500 kHz
Absolute accuracy	±35"
Repeatability	±7"
Alarm output	alarm bit (SSI), warning bit and alarm bit (BiSS)
Connection	Cable PCB-Connector, 12 pole


## DIMENSIONAL DRAWINGS

Hub shaft

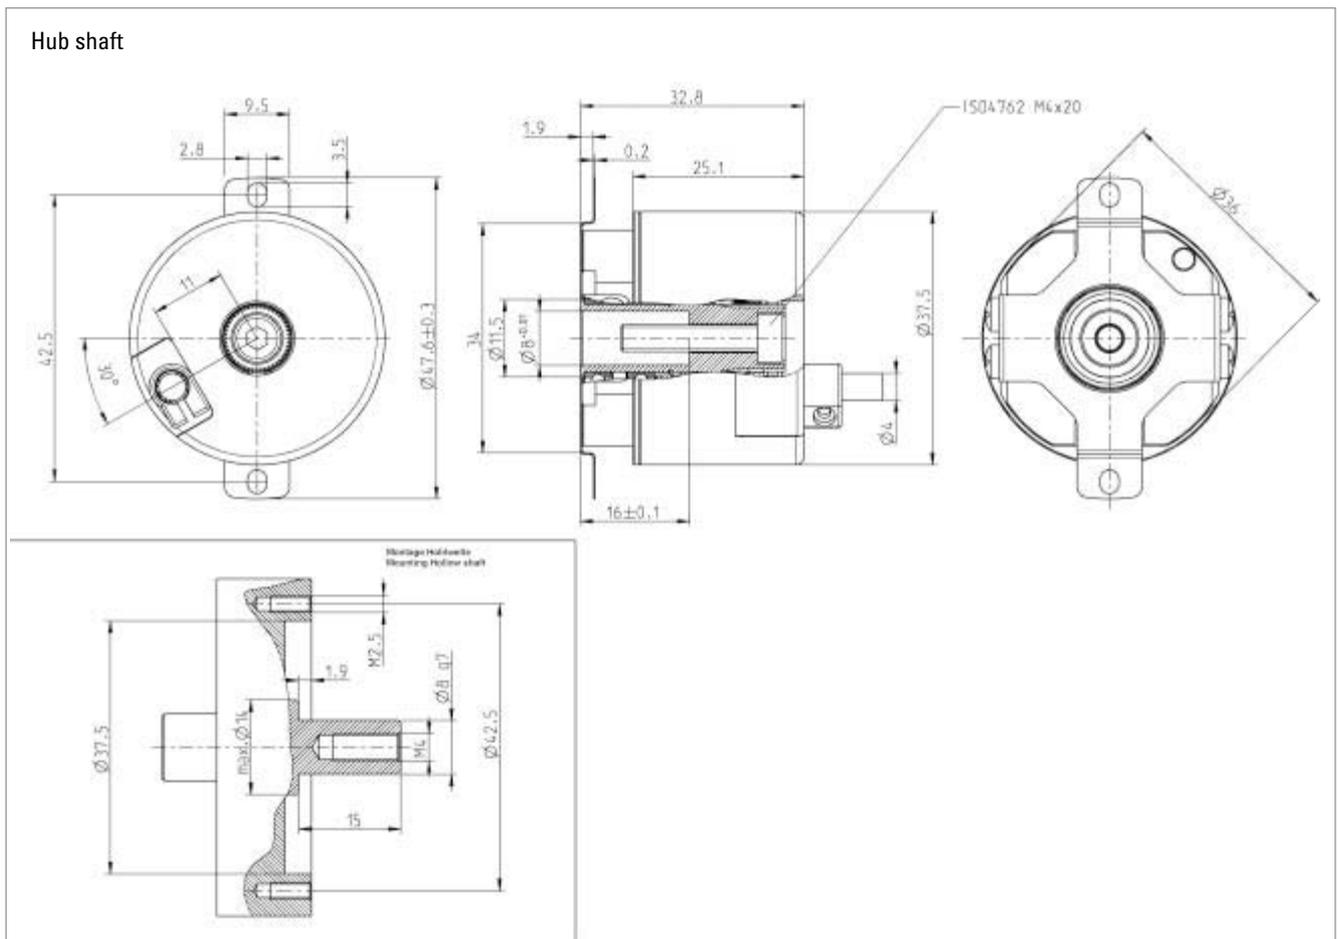


# Absolute Motor Feedback Systems Type AD 36 for AC Synchronous & BLDC Motors

Through hollow shaft

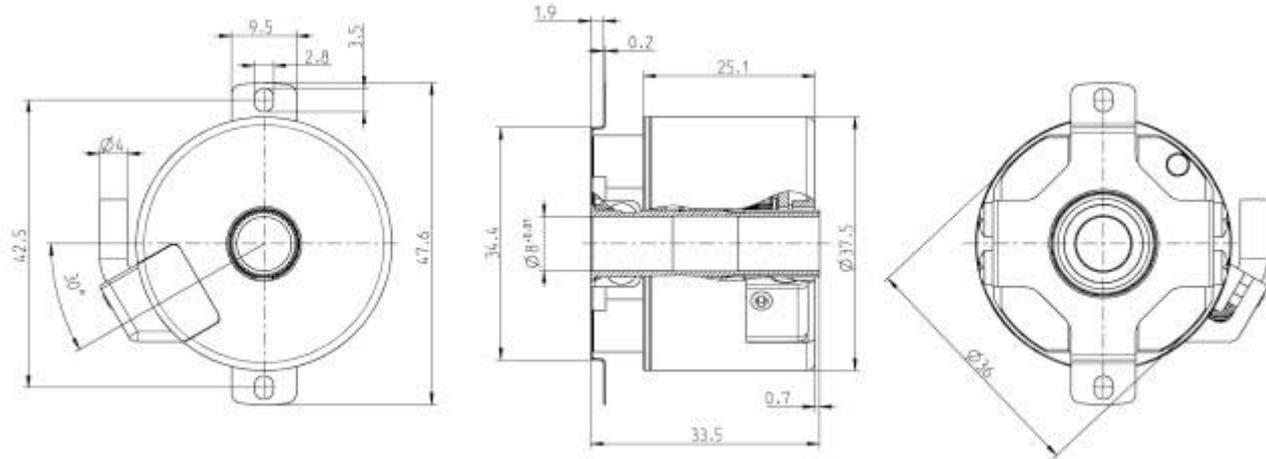

## PIN ASSIGNMENT

Colour	PIN	Signals
violet	1a	Data
green	2a	A +
brown/ green	3a	0 V Sensor
blue	4a	B +
brown	5a	Clock
red/ black	6a	5 V Sensor
yellow/ black	1b	DC 5 V/ 7 - 30 V
white	2b	Clock
red	3b	B -
white/ green	4b	0 V ( $U_N$ )
yellow	5b	A -
black	6b	Data

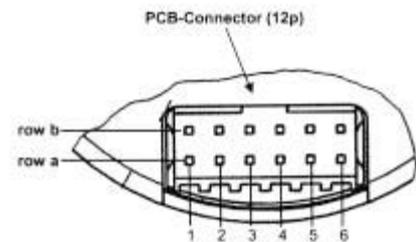

Connector:  
12 pin PCB connector  
Manufacture Berg  
Type: Minitec

## ORDERING INFORMATION

Type	Resolution	Supply voltage	Flange, Protection, Shaft	Interface	Connection
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>AD 36</b>	<b>0012</b> 12 Bit ST <b>0013</b> 13 Bit ST <b>0014</b> 14 Bit ST <b>0017</b> 17 Bit ST <b>0019</b> 19 Bit ST (BiSS) <b>1213</b> 12 Bit MT+13 Bit ST <b>1217</b> 12 Bit MT+17 Bit ST <b>1219</b> 12 Bit MT +19 Bit ST (BiSS)	<b>A</b> DC 5 V <b>E</b> DC 7 - 30 V	<b>F.0C</b> Spring tether, IP40, 8 mm trough hollow shaft <b>F.0R</b> Spring tether, IP40, 8 mm hub shaft	<b>SC</b> SSI Gray +1 Vss <b>BI</b> BiSS (1 Vss redundant optional)	<b>0</b> PCB-connector, 12 pole <b>B</b> Cable radial 0.5m

# Absolute Motor Feedback Systems Type AD 58 for AC Synchronous & BLDC Motors



- For brushless servo motors
- All-digital and highspeed
- + 120°C operating temperature
- 10.000 rpm continuous operation
- Geared optical multiturn
- SSI or BiSS interface
- Option Sinewave 1 Vpp: Harmonic distortion less than 1%
- Bandwidth 500kHz

## GENERAL INFORMATION

The AD58 is an absolute encoder with a true geared Multiturn and optical sensing technology: The mechanical design consists of two ball bearings and a flexible torque support. The AD58 is ideally suited for integration into BLDC servo motors for demanding applications such as CNC precision machining and printing in professional quality. Through its low current consumption the AD58 is contributing to lowering cost of ownership.

### Fully digital control loop

The new and completely digital OptoAsic technology enables the transition to a truly digital drive system. The conventional absolute encoders still have analog sine wave signals for the feedback of speed and position data. The AD 58, however, provides fully digital position data up to 22 Bit (Singleturn) and 12 Bit (Multiturn) over the BiSS interface with a variable clock rate up to 10 MHz. This corresponds a singleturn resolution of more than 4 million measured steps.

## TECHNICAL DATA mechanical


Housing diameter	58 mm
Protection class housing	IP 40
Protection class shaft	IP 40
Flange	Hubshaft with tether
Shaft diameter	Cone 10 mm
Max. speed	Continuous operation 10 000 min <sup>-1</sup> Short term operation 12 000 min <sup>-1</sup>
Torque	0,01 Nm
Moment of inertia	3.8 x 10 <sup>-6</sup> kgm <sup>2</sup>
Spring tether (hollow shaft)	
Tolerance axial	± 0,5 mm
Tolerance radial	± 0,1 mm
Vibration resistance (IEC 68-2-6)	100 m/ s <sup>2</sup> (10 - 2 000 Hz)
Shock resistance (IEC 68-2-27)	1000 m/ s <sup>2</sup> (6 ms)
Operating temperature	-15 ...+120°C
Storage temperature	-15 ...+85°C (because of packing)
Weight ST/ MT	260 g/ 310 g

# Absolute Motor Feedback Systems Type AD 58 for AC Synchronous & BLDC Motors

## TECHNICAL DATA electrical

Supply voltage	DC 5 V (-5 %/ +10 %)
Current consumption ST/ MT	50 mA/ 100 mA
Interface	Standard SSI or BiSS
Lines/ Drives	Clock and Data/ RS422
Output code	Binary or Gray
Resolution Singleturn	13 Bit (SSI), max. 22 Bit (BiSS)
Incremental signals	Sine - Cosine 1 V <sub>ss</sub>
No. of increments	2048
3 dB limiting frequency	500 kHz
Absolute accuracy	±35"
Repeatability	±7"
Alarm output	alarm bit (SSI), warning bit and alarm bit (BiSS)
Connection	PCB-Connector, 12 pole

## DIMENSIONAL DRAWINGS

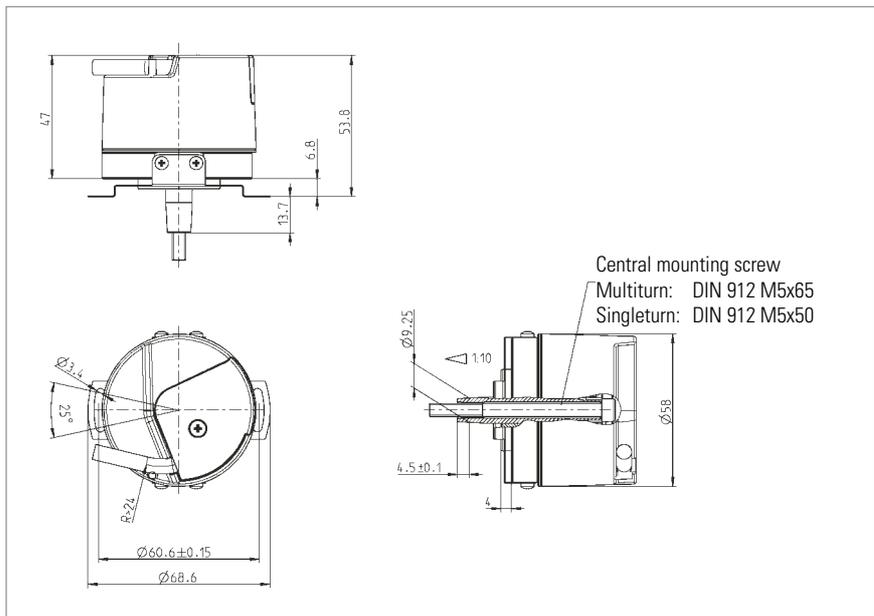

# Absolute Motor Feedback Systems Type AD 58 for AC Synchronous & BLDC Motors

## CONNECTION DIAGRAM

row b	<b>5 / 7-30 V</b> (U <sub>B</sub> ) gr/pk	<b>Clock</b> wt	<b>B -</b> rd	<b>0V (U<sub>N</sub>)</b> wt/gn	<b>A -</b> ye	<b>Data</b> bk
row a	<b>Data /</b> vio	<b>A +</b> gn	<b>0V Sensor</b> bn/gn	<b>B +</b> bl	<b>Clock /</b> bn	<b>5V Sensor</b> rd/bl
Pin	1	2	3	4	5	6

## CONNECTION ENCODER SIDE

12 pin PCB connector  
manufacture Berg, type Minitek

Screen is connected over a length of 10 mm  
with encoder housing



## ORDERING INFORMATION

Type	Resolution	Supply voltage	Flange, Protection, Shaft	Interface	Connection
<b>AD58</b>	<b>0013</b> 13 Bit ST <b>0022</b> 22 Bit ST (BiSS) <b>1213</b> 12 Bit MT+12 Bit ST <b>1222</b> 12 Bit MT+22 Bit ST (BiSS)	<b>A</b> DC 5 V <b>E</b> DC 10 - 30 V	<b>1.0K</b> Hubshaft with tether, IP 40, Cone 10 mm	<b>SC</b> SSI Gray +1 Vss <b>BI</b> BiSS (digital)	<b>0</b> PCB connector 12 pole <b>B</b> LPCB connector 12 pole with mating connector and 0.5m cable

## Motor Feedback Systems - Sine-wave Type S21 for AC Synchronous & BLDC Motors



### GENERAL INFORMATION

- Wide operating temperature range of  $-15\text{ }^{\circ}\text{C}$  up to  $+120\text{ }^{\circ}\text{C}$ , therefore optimum use of motor capacity
- High limiting frequency with excellent signal quality, allowing highest peak speeds and reduced non-productive time wastage
- Excellent immunity to interference (EN 61000-4-4, Class 4)
- High functional safety due to signal control and system monitoring (under-voltage, pollution, disc damage, end of LED service life)
- High signal quality through control and error compensation

The S21 has been constructed in line with the International Standard Resolver dimension 21, i.e. 2.1" (approx. 53 mm) and as a result is also suitable for smaller sized motors. The simplicity of connection rounds off advantages of the S21. The integrated cable plug connector combines the advantages of the plug with those of a cable connection. This leads to a fast, economical and space-saving installation.

### TECHNICAL DATA electrical


General design	as per DIN EN 61010-1, protection class III, contamination level 2, over voltage class II
Supply voltage	DC 5 V $\pm 10\%$ (SELV)
Max. current w/o load	120 mA
Incremental signals A,B	Sine - Cosine 1Vpp
Number of pulses	2048
Accuracy	$\pm 35''$
Repeatability	$\pm 7''$
Max frequency output	500 kHz
Reference signal: R	$> 0.4\text{ V}$ (1 pulse per rev.)
Commutation signals: C, D	Sine - Cosine 1Vpp (1 period per rev.)
Connection	PBC connector with cable

### TECHNICAL DATA mechanical

Shaft form	Cone 1/10
Shaft variations	Tapered solid shaft (Tapered hollow shaft on request)
Shaft diameter	10 mm
Shaft load tapered solid shaft	radial 90 N, axial 20 N
Compensation	axial $\pm 0.5\text{ mm}$ , radial $\pm 0.1\text{ mm}$
Nominal speed	$12000\text{ min}^{-1}$
Max. speed	$15000\text{ min}^{-1}$ ( $< 1\text{ s}$ )
Torque	$\leq 1\text{ Ncm}$
Protection class	IP 40
Operating temperature	$-15\text{ }^{\circ}\text{C}$ ... $+120\text{ }^{\circ}\text{C}$
Storage temperature	$-20$ ... $+80\text{ }^{\circ}\text{C}$
Vibration resistance (IEC 68-2-6)	$\leq 100\text{ m/s}^2$ (10 ... 2000 Hz)
Shock resistance (IEC 68-2-27)	$\leq 1000\text{ m/s}^2$ (6 ms)
Material housing	Aluminium


# Motor Feedback Systems - Sine-wave Type S21 for AC Synchronous & BLDC Motors

## S21 SIGNALS

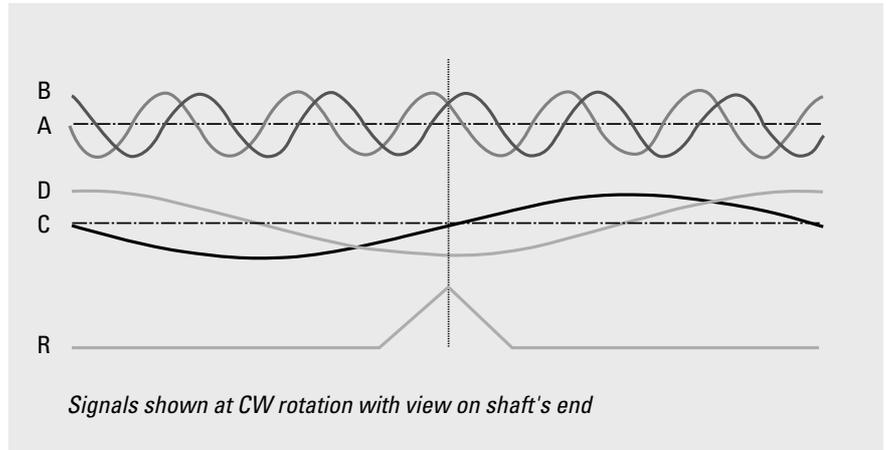

The incremental signals A and B and the zero signal R are differential voltage signals. The differential signal level is 1Vpp. The zero signal appears once per revolution and reaches its maximum value at the angle where the amplitudes of A and B Signals are equal. The coarse tracks C and D deliver one sinewave period per revolution and are utilized to determine the absolute rotor position of Brushless DC motors for startup commutation. All signals have a DC offset of 2.5 V.

## S21 SIGNAL QUALITY

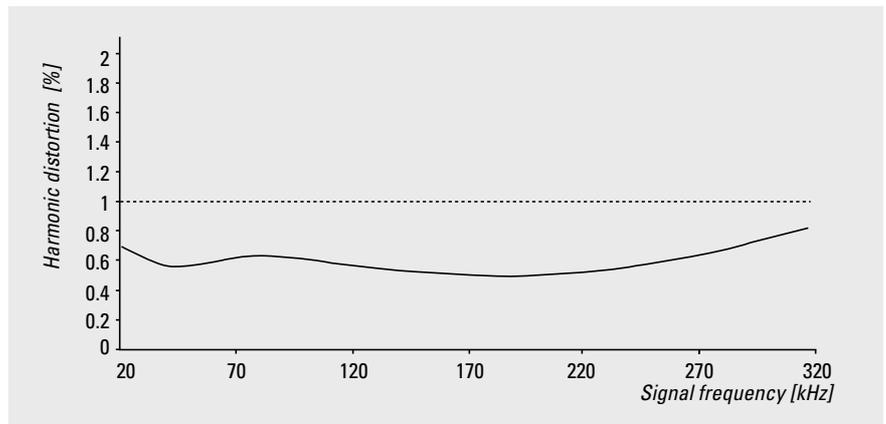


The quality of the servo loop is determined to a large extent by the absence of harmonics in the encoder's sinewave signals, particularly at low speed. In order to achieve high interpolation factors in the sequencing control, the incremental sinewave signals A and B are available with a harmonic distortion significantly under 1% throughout the specified temperature range. This delivers excellent synchronism and a high level of positional accuracy with servo axes.

## PCB-CONNECTOR PIN OUT

Row a	5 V Sense rd/bl	D- vio	B- rd	R- pk	0 V Sense gn/br	A- ye	C- br
Row b	wt C+	gn A+	wt/gn GND	gr R+	bl B+	bk D+	gr/pk U <sub>B</sub>
Pin	7	6	5	4	3	2	1

# Motor Feedback Systems - Sine-wave Type S21 for AC Synchronous & BLDC Motors

## DIMENSIONAL DRAWINGS TAPERED SOLID SHAFT

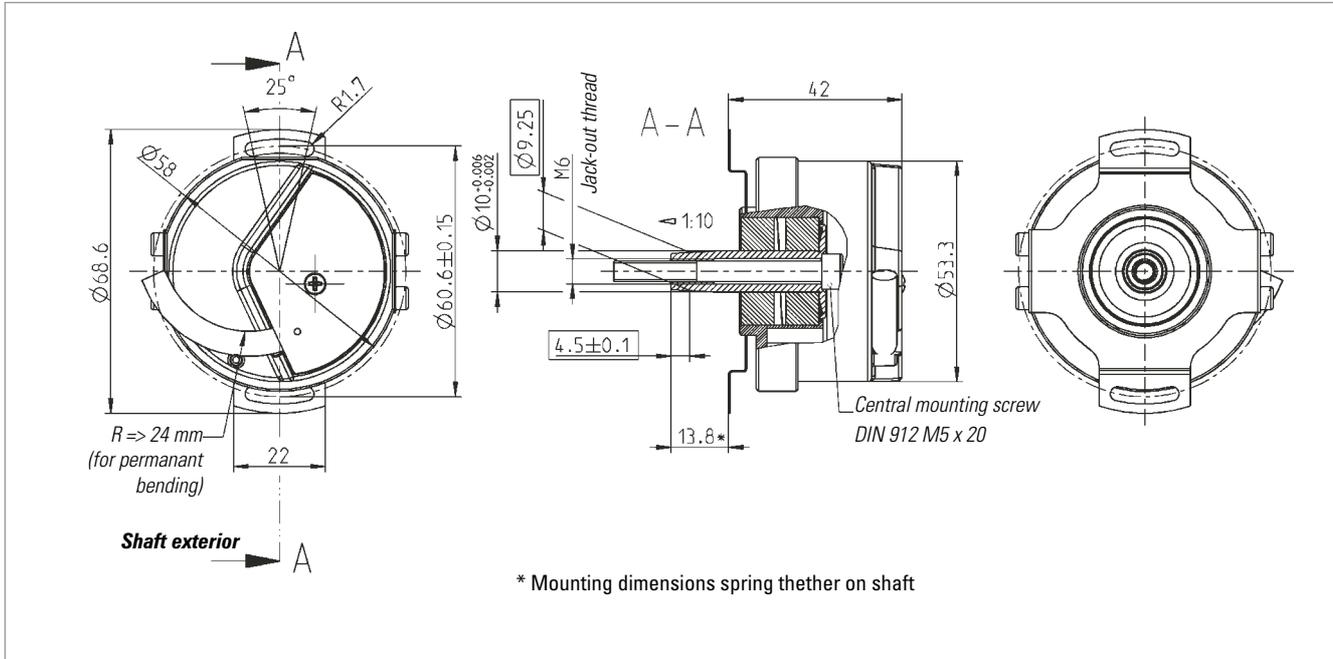

## ORDERING INFORMATION

	Ordering code
Tapered solid shaft with mounting support	0 548 011
Tapered hollow shaft	on request




- Provide accurate, absolute position feedback
- Rugged and able to withstand high shock and vibration levels
- Impervious to most industrial contaminant and temperature extremes
- High temperature up to 220°C
- Operation in non electroconductive liquids possible
- Maintenance-free (brushless)
- Aging resistant (no electronic components)
- Low-priced

**Application fields:**

- Servo drives
- Medical technologie (sterilisable)
- Robots
- Gearless drives
- Military engineering

Brushless resolvers are the ideal rotor position indicators for the position feedback of brushless motors, robots or direct drives. They are robust, reliable and suitable for high operating temperatures until 155 °C and resistant to most process liquids, contaminations, radiation and EMC-Interferences as well as highly shock-proof and vibration-resistant. These resolvers deliver absolute position information and can be combined with low cost integrated circuits, to generate an up to 16 bit digital position-value or, to produce an emulated incremental encoder output signal, as well as direction and analogue speed-signals.

## DIMENSIONAL DRAWINGS

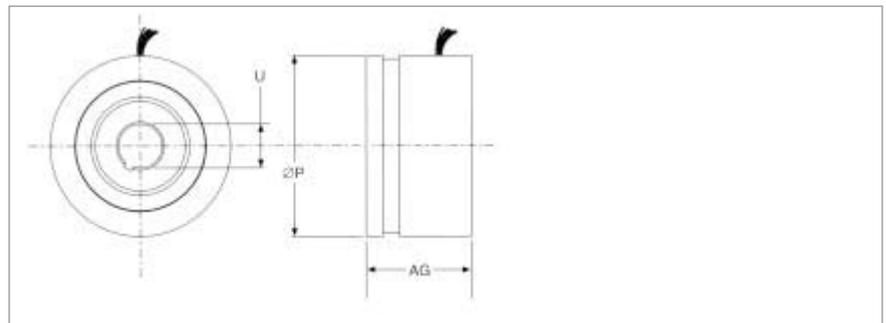

## MODELLÜBERSICHT

Type (model)	AG	P	U maximal
10BRCX	16.5 mm	26.5 mm	6.0 mm
15BRCX	25.4 mm	36.8 mm	12.0 mm
21BRCX	31.8 mm	52.4 mm	20.3 mm
31BRCX	31.8 mm	77.5 mm	40.0 mm
55BRCX	31.8 mm	139.7 mm	92.7 mm

**Ordering information:**

Since resolvers are produced according to special applications, the production takes place only in big batch sizes. For replacement needs, please contact your drive-manufacturer.




**DIMENSIONAL DRAWINGS**

### HOUSED RESOLVERS SERIES R 11

- Brushless construction
- Maintenance free
- Able to withstand high shock and vibration levels
- Impervious to most industrial contaminant and temperature extremes
- High temperature up to 115°C

Housed Resolvers distinguish themselves through high reliability in harsh environments, operating temperatures up to 155 °C and high shock resistance. Based on their brushless design they are the ideal supplement to brushless servo motors. The accuracy as well as the repeatability are excellent. These resolvers are equipped with precision bearings and are maintenance-free. They are also the shortest resolvers, that are available on the market.

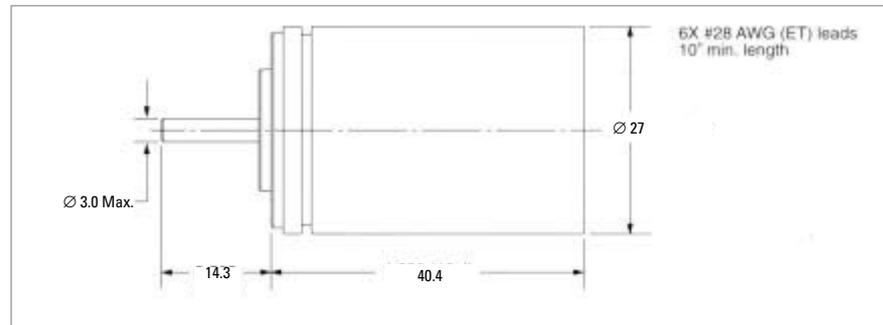


**DIMENSIONAL DRAWINGS**

### HOUSED INDUSTRY RESOLVERS SERIES R 25

- Rugged housing with IP 65
- Able to withstand high shock and vibration levels
- Impervious to most industrial contaminant and temperature extremes
- High temperature up to 125°C
- Flange- and servo-mount styles

Industry resolvers possess especially robust casings with protection class IP 65. They are especially suitable for the use with high temperatures (+125 °C in long-term operation), and offer extraordinary values of vibration and shock resistance (40g as well as 200g), as well as noise immunity. The user is flexible in the application because of the corrosion resistant versions for integration or extension , the connection could easily be done by Standard MS-style connectors. The accuracy has a spread of ± 7 up to ± 200 arc-minutes.

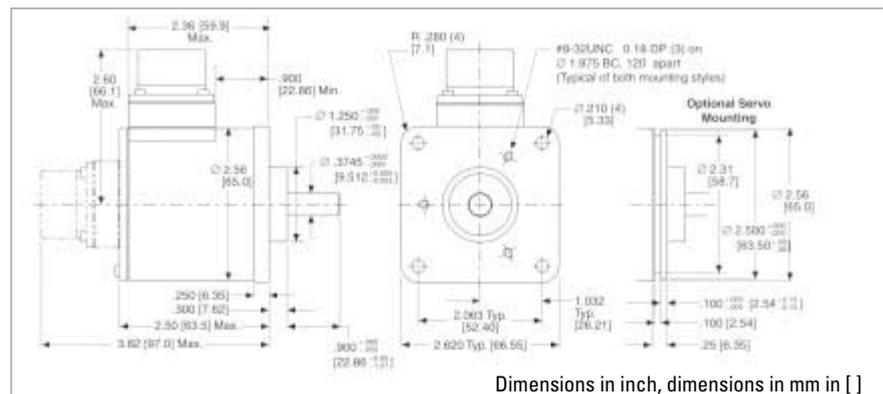

## Accessories

### **Problem solutions from a single source.**

Our wide range of accessory modules completes the encoder programme.

With these modules, we offer you an optimum means of meeting your application demands.


for absolute encoder connection



- Large, 6-digit, 14 mm high LED display
- Predetermined offset
- 2 variable limit values
- Easy direct selection by 2 function keys
- Relay outputs with change-over contacts
- Chain value or absolute value indication
- npn/pnp programming of inputs
- Synchronous Serial Interface

APPLICATION FIELDS

Indication of infeed values, lengths, support- or machine positions, totalizing values etc. The coupling to the machine may be done with an absolute encoder with SSI-Interface from the wide and comprehensive Hengstler program of types AC 58.

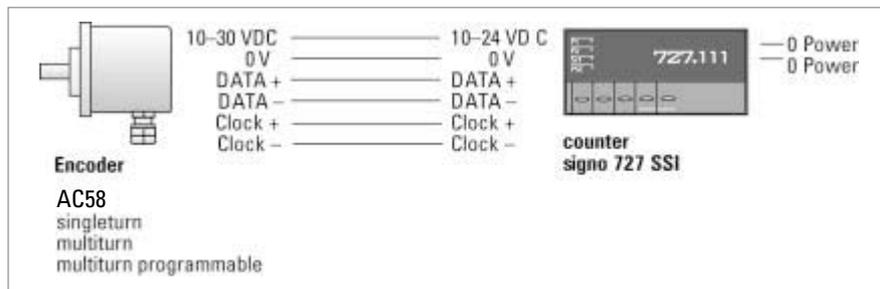


DISPLAY



- Section A:** shows the actual count value when in counting mode, and the changeable parameters when in programming mode.
- Section B:** LED indicators showing the active output signal, and in programming mode indicating the changeable parameter.

PROGRAMMING

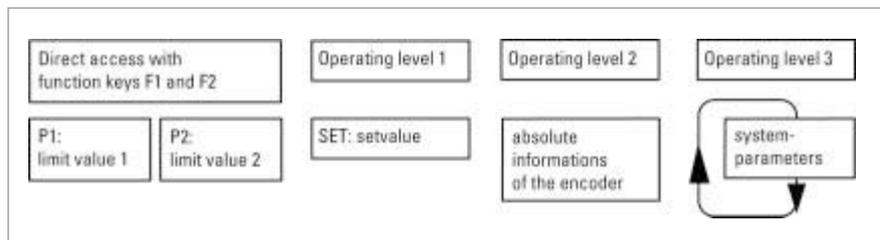

Programming of signo 727 is possible by direct access and in the 3 operating levels

- Direct access:** Limit values are set with the function keys F1, F2
- Operating level 1:** Set value
- Operating level 2:** Includes absolute informations of the encoder
- Operating level 3:** Includes system parameters, which are normally programmed during start-up procedure only.

Unauthorized programming of the signo 727 is prevented by a control input, which can lock the operating levels.

## Position indicator signo 727 SSI

### for absolute encoder connection


#### TECHNICAL DATA

Display	LED, indication value/preselection 6 digits, suppression of leading zeros, programmable decimal point, minus sign
Digit Height	14 mm
Power Supply Voltage $U_B$	DC 12 ... 24 V or AC 115/230 V, depending on version
Max. current w/o load	DC 12 ... 24 V < 250 mA, AC 115/230 V < 60 mA
Sensor Supply	AC operation DC 12...24 V, DC operation $U_B - 2 V$ , $I_{max} = 60 mA$
Data Retention	non-volatile memory > 10 years
Operating Temperature	0 ... 50° C
Storage Temperature	-20 ... +70° C
Electrical Connection	plug-in terminals
Mounting	with clamping frame
Protection Class (IEC 144)	front side IP 54, terminals IP 20
Noise Immunity EMC	severity 3 according to IEC 801, part 2 + part 4
Vibration resistance	10 m/s <sup>2</sup> (10 ... 150 Hz) according to IEC 68-part 2-6
Shock resistance	100 m/s <sup>2</sup> (18 ms) according to IEC 68-part 2-27
General design	according to VDE 0411, DIN 57411, protection class II
Inputs	SSI Data + SSI Data -
Baud rate	approx. 100 kHz
Control Input	Application Input 1, static Display hold, Reset or Chain Reset (programmable)
Keylock	static
Outputs	SSI measure + SSI measure -
Relay <sup>1</sup>	Out 1 and Out 2
Contact Type	changeover relay
Switching Voltage	max. 250 VAC/30 VDC, mind 5 VAC/DC
Switching Current	max. 1A, min. 10 mA


<sup>1</sup> for versions with limit values only

# Position indicator signo 727 SSI for absolute encoder connection

## DIMENSIONAL DRAWINGS

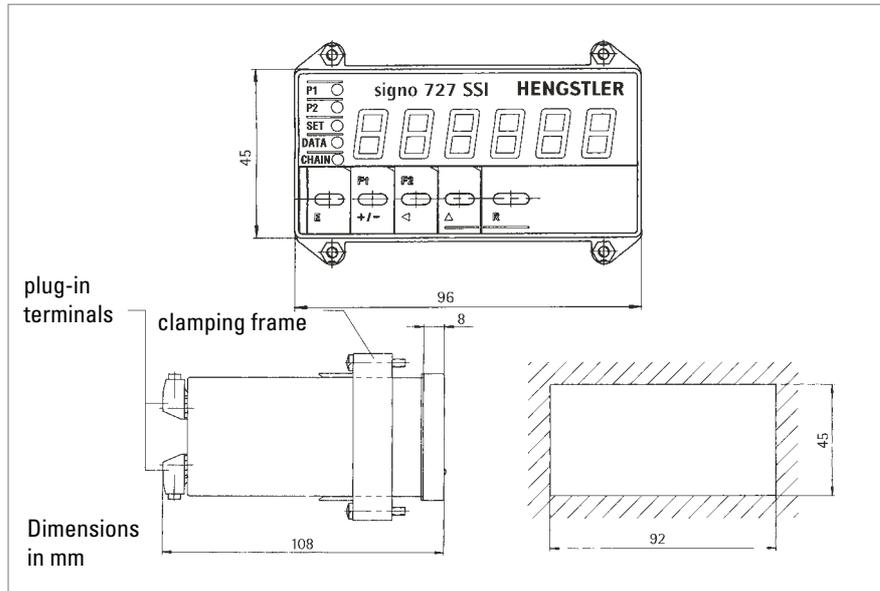

## CONNECTION PLAN

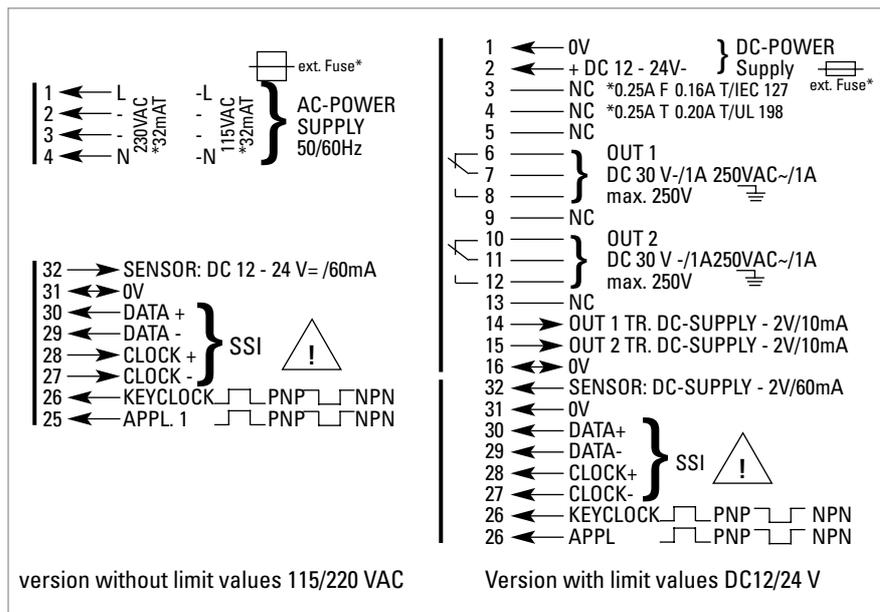

## ORDERING DATA

Type	Absolute encoder connection	Supply	Ordering code
signo 727 without limit values	SSI	DC 12 - 24 V	<b>0 727 111</b>
signo 727 without limit values	SSI	115/230 VAC	<b>0 727 112</b>
signo 727 with 2 limit values	SSI	DC 12 - 24 V	<b>0 727 131</b>
signo 727 with 2 limit values	SSI	115/230 VAC	<b>0 727 132</b>

opt. with interface RS 485, RS 232 on request

### Please note:

Absolute encoders with capped Gray Gode (e.g. 360 or 720) must not be connected  
 Max. encoder resolution: 12 Bit ST (singleturn) and  
 24 Bit MT (multiturn 12 + 12 Bit)


# Encoder with Shock Module

## AC58-S/M/P WITH OPTIONAL SHOCK MODULE


Applications with vibration rates of up to  $>100 \text{ m/s}^2$  and shock rates  $>1000 \text{ m/s}^2$  require the use of a shock module. By means of integrated attenuating elements, these encoder ratings are reduced.

Fixing	flange by means of clamping flange or clamping eccentric, shaft by means of flexible coupling
Absolute max. shaft load	axial 30 N, radial 100 N
Shaft diameter	10 mm

## DIMENSIONAL DRAWING Encoder with shock module, connecting cable

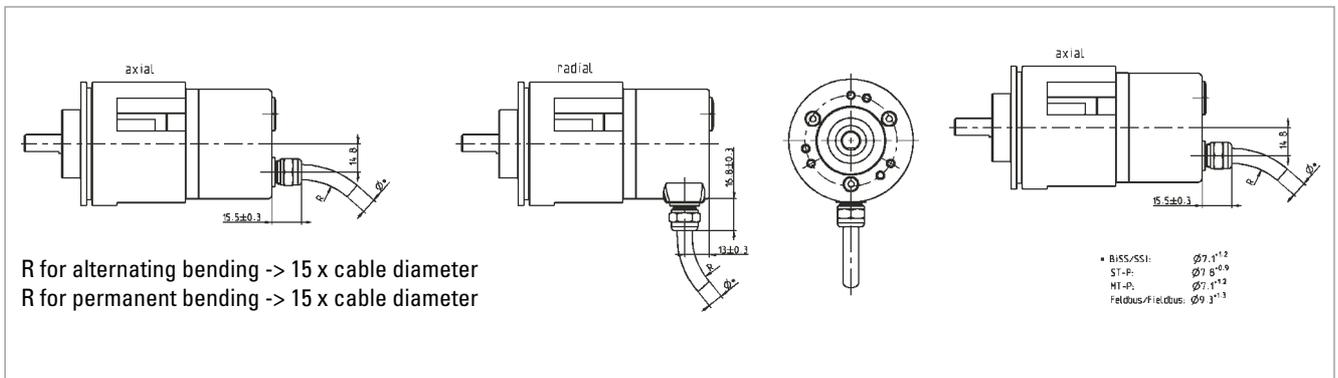

## DIMENSIONAL DRAWING Encoder with shock module, flange connector

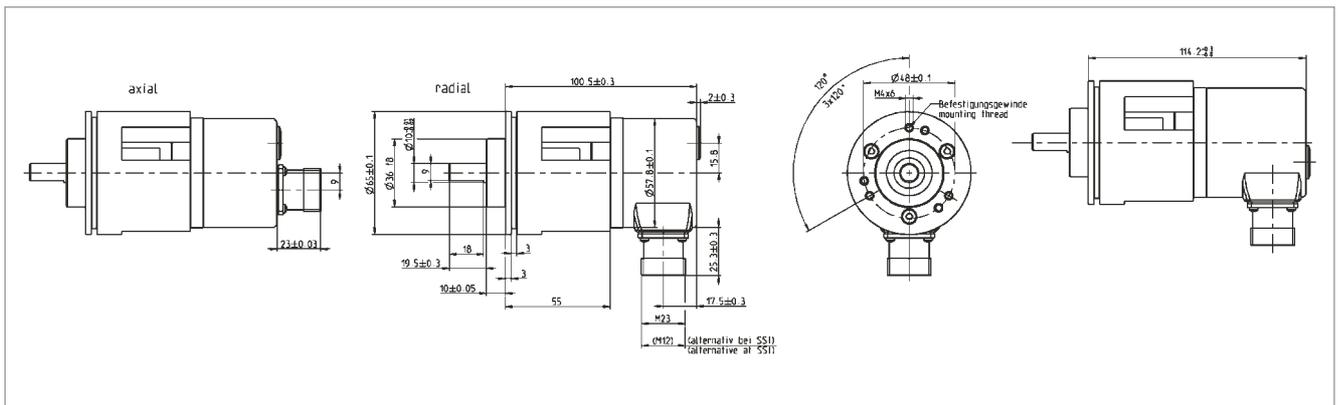

## ORDERING DATA

For the encoder option with shock module, please enquire by stating your desired encoder type.

# Flexible Couplings


Shaft encoders must be protected against excessive mechanical stresses, which occur whenever there are angular, axial, or radial misalignments between the machine and shaft encoder shafts.

Our flexible couplings can compensate for this within limits.



## PLASTIC COUPLING

Max. speed	10 000 min <sup>-1</sup>
Torque max.	20 Ncm
Moment of inertia	1.1 gcm <sup>2</sup>
Torsional spring constant	12 Nm/rad
Max. angular misalignment	±2.5°
Max. shaft misalignment radial / axial	±0.3 mm / ±0.2 mm
Max tightening torque of set screws	70 Ncm
Material	polyamide 6.6 glass-fibre reinforced
Weight approx.	6 g

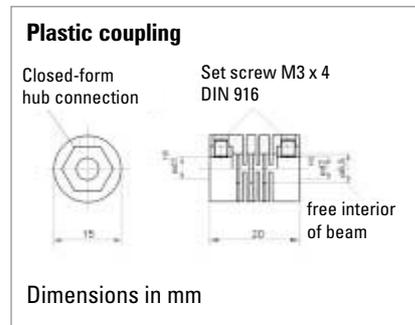

Hub diameter


5/5 mm	Ordering code <b>3 520 034</b>
5/6 mm	Ordering code <b>3 520 033</b>
6/6 mm	Ordering code <b>1 761 026</b>

Suitable for encoder type RI 39  
RI 32, RI 41, RI 42 for simple applications




## HELICAL COUPLING

Max. speed	6 000 min <sup>-1</sup>
Torque max.	80 Ncm
Moment of inertia	8.7 gcm <sup>2</sup>
Torsional spring constant	14 Ncm/degree
Max. angular misalignment	±4°
Max. shaft misalignment radial/axial	±0.25 mm / ±0.4 mm
Max tightening torque of set screws	80 Ncm
Material	AlCuMgPb, chromed
Weight	16 g

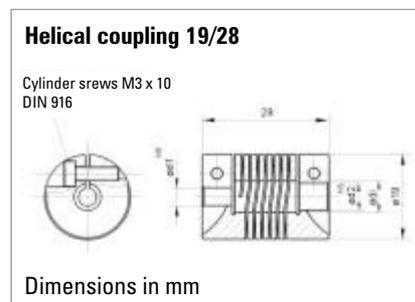

Hub diameter	
5/5 mm	Ordering code <b>3 520 036</b>
5/6 mm	Ordering code <b>3 520 035</b>
6/6 mm	Ordering code <b>0 070 653</b>
6/6.35 mm	Ordering code <b>3 520 051</b>
6.35/6.35 mm	Ordering code <b>3 520 057</b>

Suitable for encoder type RI 30, RI 32,  
RI 36, RI 41, RI 42, RI 58, AC 58

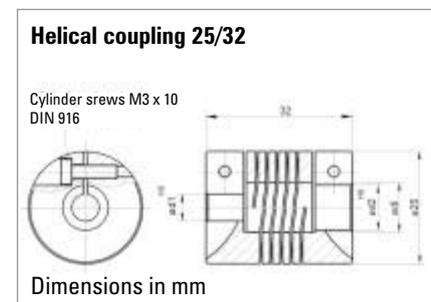

Hub diameter	
6/9.53 mm	Ordering code <b>3 520 052</b>
6/10 mm	Ordering code <b>3 520 066</b>
6.35/9.52 mm	Ordering code <b>3 520 062</b>
10/12 mm	Ordering code <b>3 520 065</b>
10/10 mm	Ordering code <b>3 520 074</b>

Suitable for encoder type RI 58, AC 58

## Flexible Couplings



### ISOLATED DISK COUPLING

Max. speed		12000 min <sup>-1</sup>
Torque max.		60 Ncm
Max. shaft misalignment	radial	±0.3 mm
	axial	±0.4 mm
	angular	±2.5°
Torsional spring constant		30 Nm/rad
Material	Flanges	aluminium, anodized
	Spring disc	plastic, glass-fibre reinforced

#### Hub diameter

5/6 mm	Ordering code <b>3 520 080</b>	Suitable for encoder type RI 30, RI 32, RI 36, RI 41, RI 42, RI 58, AC 58
6/6 mm	Ordering code <b>3 520 081</b>	
6/10 mm	Ordering code <b>3 520 082</b>	
6/6.35 mm	Ordering code <b>3 520 083</b>	
6/9.53 mm	Ordering code <b>3 520 084</b>	
6.35/6.35 mm	Ordering code <b>3 520 085</b>	
7/7 mm	Ordering code <b>3 520 086</b>	
10/6.35 mm	Ordering code <b>3 520 087</b>	
10/10 mm	Ordering code <b>3 520 088</b>	





### DISK COUPLING

Max. speed		12000 min <sup>-1</sup>
Torque max.		80 Ncm
Moment of inertia		19 gcm <sup>2</sup>
Torsional spring constant		150 Nm/rad
Max. angular misalignment		±3.0°
Max. shaft misalignment	radial	±0.4 mm
	axial	±0.4 mm
Max tightening torque of set screws		80 Ncm
Hub diameter d and d <sub>1</sub>		6 mm H 8
Material	coupling body, flange	AlCuMgPb, anodized
	preloaded disc	stainless steel
Weight approx.		14.5 g

Ordering code **0 070 663** suitable for encoder type RI 36, RI 58, AC 58

### DIMENSIONAL DRAWINGS

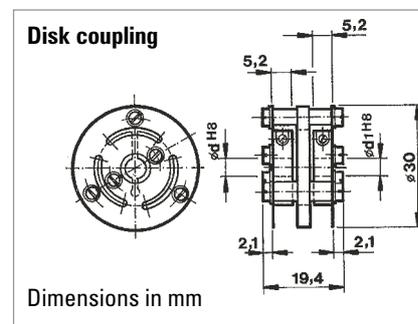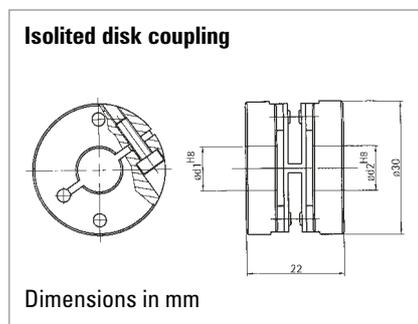

# Flexible Couplings



## BELLOWS COUPLING

Max. speed		8000 min <sup>-1</sup>
Torque max.		80 Ncm
Moment of inertia		9 gcm <sup>2</sup>
Torsional spring constant		140 Nm/rad
Max. angular misalignment		±4.0°
Max. shaft misalignment	radial	±0.3 mm
	axial	±0.5 mm
Max tightening torque of set screws		150 Ncm
Material	flange	aluminium
	bellows	stainless steel
Weight		16 g

Hub diameter

12/12 mm

10/10 mm

9.53/9.53 mm

6/6 mm

Ordering code **0 070 666**


Ordering code **3 520 037**

Ordering code **3 520 038**

Ordering code **3 520 068**

Suitable for type RI 58, AC 58

## DIMENSIONAL DRAWING

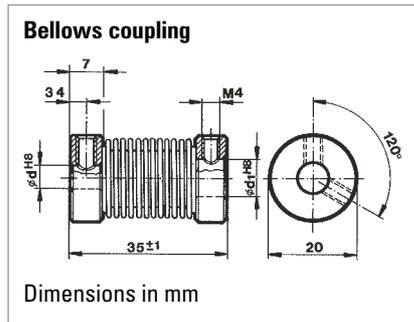

# Mounting


## CLAMPING ECCENTRIC

Material CuZn39Pb3, surface nickel-plated

Set of three

Suitable for encoders with synchro flange type RI 30, RI 36, RI 58, AC 58


	$\varnothing d_1$	$\varnothing d_2$	$\varnothing d_3$	a	b	c
Ordering code 0 070 655 (RI 58, AC 58) Synchro flange for M3)	$8.9_{+0.1}$	6.5	3.2	$4.9_{-0.1}$	$2.9_{-0.1}$	1.2
Ordering code 0 070 657 (RI 58, AC 58) Synchro flange for M3)	12	9	3.5	$4.9_{-0.1}$	$2.9_{-0.1}$	1.5
Ordering code 0 070 654 (RI 30, RI 36) Synchro flange for M2.5)	$6.8_{+0.2}$	5	2.8	$4.4_{-0.1}$	$2.4_{-0.1}$	0.9

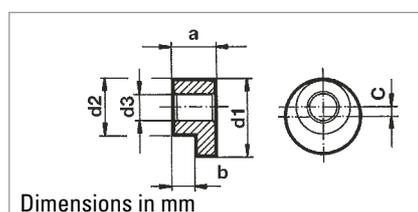

Dimensions in mm

## SQUARE FLANGE ADAPTER 80 x 80 mm for clamping flange RI 58, AC 58 (fastening material included)


Ordering code 1 522 327

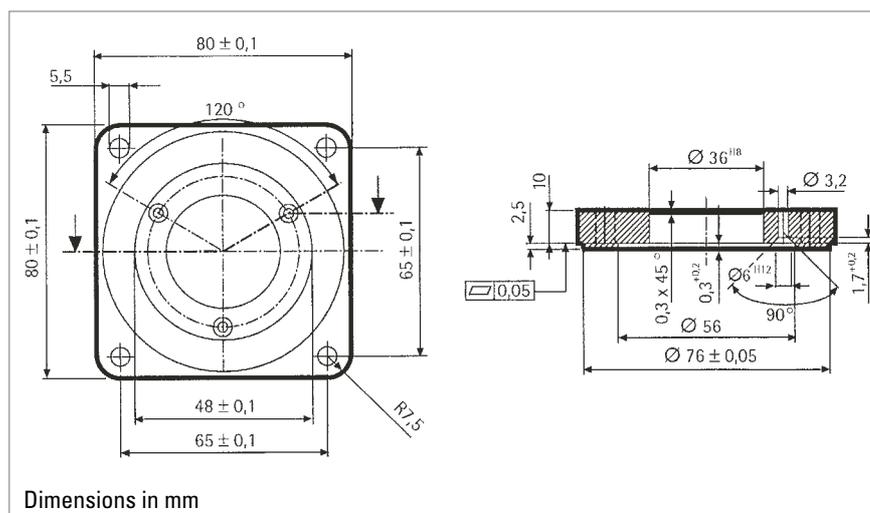

Dimensions in mm

## SQUARE FLANGE ADAPTER 58 x 58 mm for clamping flange RI 58, AC 58 (fastening material included)

Ordering code 1 522 326

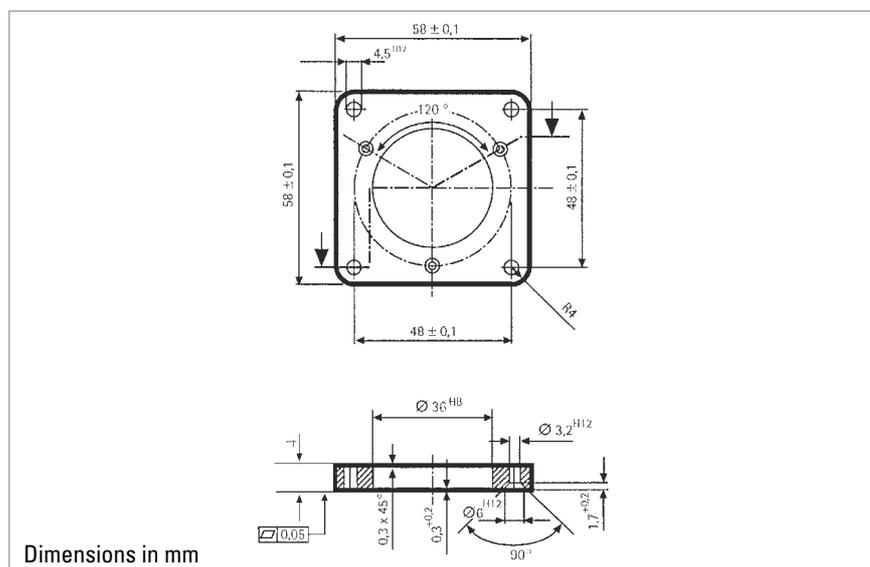


Dimensions in mm

# Mounting


**SYNCHRO FLANGE ADAPTER**  
for clamping flange RI 58, AC 58  
(fastening material included)

Ordering code 1 522 328

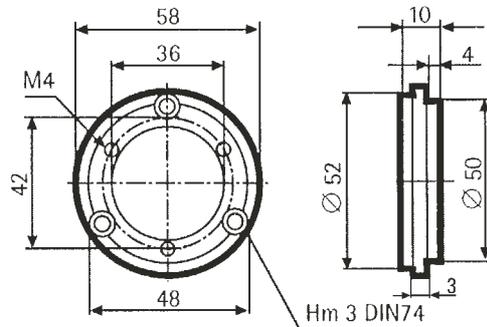


**SYNCHRO FLANGE ADAPTER**  
for clamping flange RI 58  
(same dimensions as TR HE 65)  
(fastening material included)

Ordering code 1 522 542

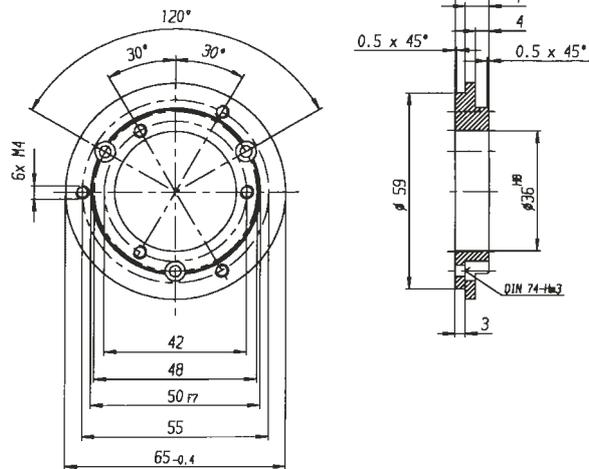

**SYNCHRO FLANGE ADAPTER**  
for clamping flange RI 58  
(same dimensions as AG 661)  
(fastening material included)

Ordering code 1 522 547

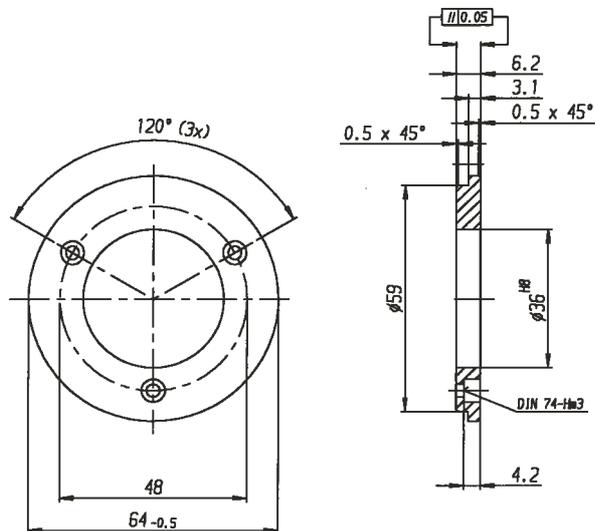





# Mounting

**MOUNTING BELL (PLASTIC)**  
for synchro flange RI 58, AC 58  
(clamping eccentric and  
fastening material included)

Ordering code 1 522 330

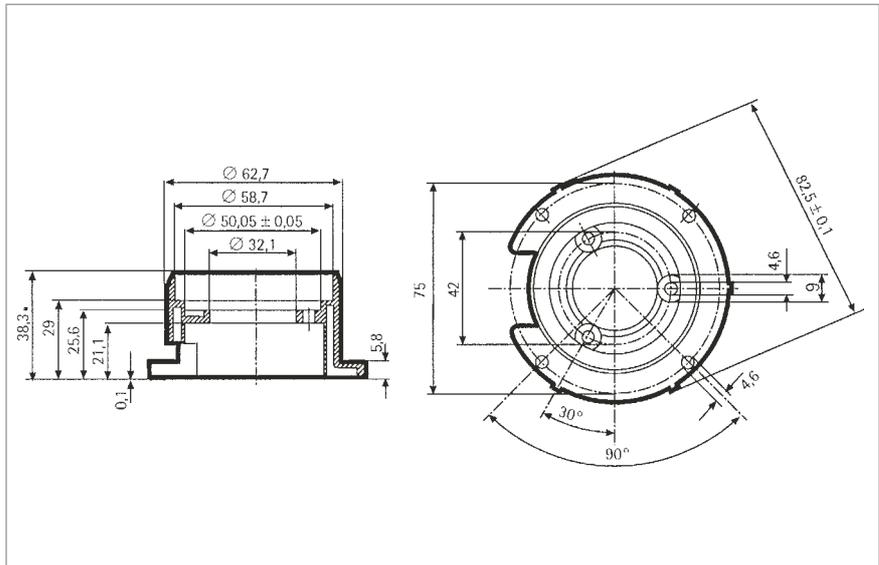


# Connectors

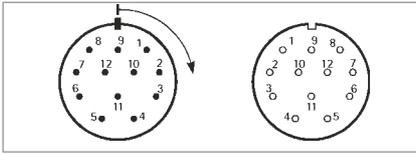

## NUMBERING OF PINS


### Clockwise system:

A connector with pin contacts, which is numbered clockwise, and the corresponding counter-plug connector with socket contacts (which consequently must be numbered counter-clockwise), is called right-turning.

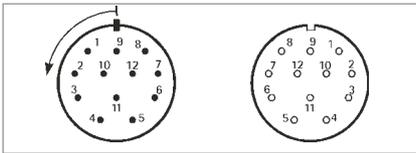


### Counter clockwise system:

A connector with pin contacts, which is numbered counter clockwise, and the corresponding counter-plug connector with socket contacts (which consequently must be numbered clockwise), is called left-turning.

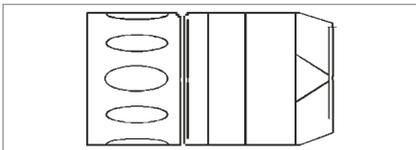


## PLUG

A connector with coupling nut is called plug, without regard to its pin or socket contacts.

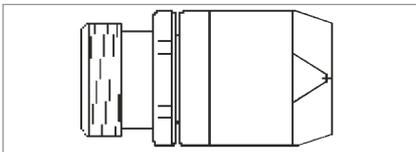


## COUPLING

A connector with outer thread is called coupling without regard to its pin or socket contacts.

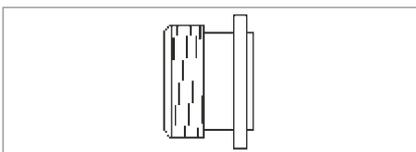

## CONNECTOR

A connector is fastened to the encoder or the machine's housing, has an outer thread (like the coupling) and is available with pin or socket contacts.

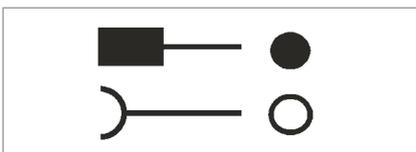


## CONTACTS

Sign for pin contact


Sign for socket contact

# Connectors

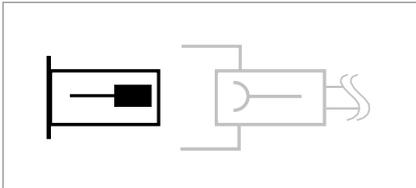

## CONNECTOR FOR MOUNTING IN ENCODER HOUSING (IDENTICAL WITH ENCODER CONNECTOR CONIN 12 POLE)


Connector (pins)	Ordering code
CONIN 12 pole, clockwise	<b>3 539 198</b>
CONIN 12 pole, counter clockwise	<b>3 539 230</b>

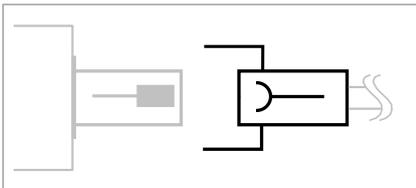

## CONNECTOR MATCHING WITH ENCODER CONNECTOR <sup>1</sup>

Encoder connector (pins)	Suitable plug (socket)
Conin 12 pole, clockwise (C, D)	<b>3 539 202</b> (PG 9)
Conin 12 pole, counter clockwise (G, H)	<b>3 539 229</b> (PG 9)
Conin 17 pole, counter clockwise (U, V)	<b>3 539 256</b>
Conin 17 pole, clockwise (W, Y)	<b>3 539 254</b>
Conin 21 pole, clockwise	<b>1 540 232</b>
Binder 6 pole (J, N)	<b>3 539 472</b> (straight, IP 67) <b>3 539 209</b> (bent, IP 40)
MIL 6 pole (M, Q)	<b>3 539 261</b>
MIL 7 pole (L, P)	<b>3 539 262</b>
MIL 10 pole (K, O, R, T)	<b>3 539 258</b>
KPT 12-8P (1, 2)	<b>3 539 333</b>

<sup>1</sup> Extension cables with plug refer to "Extension Cables"

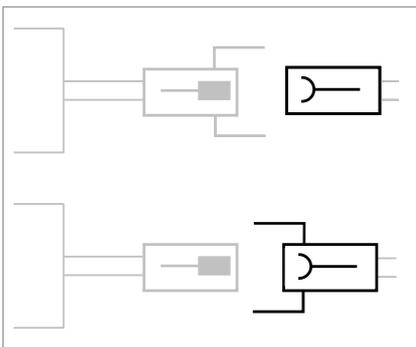




## CONNECTOR MATCHING WITH ENCODER CABLE WITH CONNECTOR

Encoder plug (pins)	Suitable coupling (socket)
Conin 12 pole, clockwise (-C) (3 539 186)	<b>3 539 187</b>
VDW <sup>1</sup> , 12 pole, clockwise (-B) (3 539 252)	<b>3 539 304</b>
SUB-D, 37 pole, (-F) (1 542 025)	<b>1 542 024</b>
Encoder coupling (pins)	Suitable plug (socket)
Conin 12 pole, counter clockwise (-D) (3 539 273)	<b>3 539 229</b>
VDW <sup>1</sup> , 12 pole, counter clockwise (-E) (3 539 274)	<b>3 539 305</b>

<sup>1</sup> VDW corresponding to Conin plastic-coated

## Connectors

### CONNECTOR ON CONNECTING CABLE SUITABLE FOR DOWNSTREAM LOGIC CIRCUIT

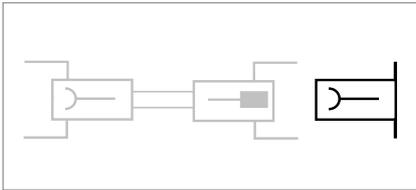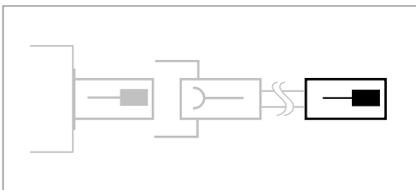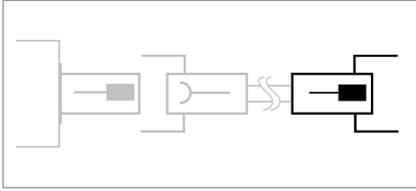

Plug (pins)	Ordering code
Conin 12 pole, clockwise	<b>3 539 186</b>
Conin 12 pole, counter clockwise	<b>3 539 316</b>
Conin 9 pole, clockwise	<b>3 539 293</b>
VDW <sup>1</sup> 12 pole, clockwise	<b>3 539 252</b>
Conin 17 pole, clockwise	<b>3 539 317</b>
Conin 17 pole, counter clockwise	<b>3 539 309</b>

Coupling (pins)	Ordering code
Conin 12 pole, clockwise	<b>3 539 301</b>
Conin 12 pole, counter clockwise	<b>3 539 273</b>
VDW <sup>1</sup> 12 pole, counter clockwise	<b>3 539 274</b>
Conin 17 pole, clockwise	<b>3 539 302</b>
Conin 17 pole, counter clockwise	<b>3 539 303</b>

<sup>1</sup> VDW corresponding to Conin plastic-coated

### CONNECTOR FOR MOUNTING INTO DOWNSTREAM LOGIC CIRCUIT HOUSING

Connector (socket)	Ordering code
Conin 12 pole, clockwise	<b>3 539 318</b>
Conin 12 pole, counter clockwise	<b>3 539 319</b>

### MOUNTING ACCESSORIES


Mounting spanner for Conin connectors	Ordering code
	<b>3 539 343</b>

### OTHER CONNECTORS

Conin plug 9 pole clockwise, socket	Ordering code
	<b>3 539 294</b>
Binder 6 pole	<b>3 539 472</b>

## Extension cables

### EXTENSION CABLES with plug (socket) on one end

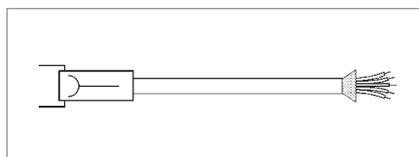

#### CONIN 12 POLE FOR RI 58 (TPE CABLE)

Pin	Colour <sup>1</sup>	Lead mm <sup>2</sup>
1	pink	0.14
2	blue	0.14
3	red	0.14
4	black	0.14
5	brown	0.14
6	green	0.14
7	violet	0.14
8	grey	0.14
9	Screen	0.14
10	white/green	0.5
11	white	0.14
12	brown/green	0.5
Housing	Screen	

<sup>1</sup> Cable version 3280 112

#### BINDER 6 POLE FOR RI 30, RI 36, RI 58 (PVC CABLE)

Pin	Colour <sup>1</sup>	Lead mm <sup>2</sup>
1	red	0.5
2	white	0.14
3	yellow	0.14
4	green	0.14
5	yellow/black	0.14
6	black	0.5
Housing	Screen	

<sup>1</sup> Cable version 3280 113

#### CONIN 12 POLE FOR AC 58 AND AC 58 WITH SSI-INTERFACE (TPE CABLE)

Pin	Colour <sup>1</sup>	Lead mm <sup>2</sup>
1	brown	0.5
2	pink	0.14
3	yellow	0.14
4		
5	blue	0.14
6		
7		
8	white	0.5
9		
10	grey	0.14
11	green	0.14
12	black	0.14
Housing	Screen	

<sup>1</sup> Cable version 3280 220

#### EXTENSION CABLE WITH M12 PLUG FOR AC 58

Length	Ordering code
3 m	<b>1 565 329</b>
5 m	<b>1 565 330</b>
10	<b>1 565 331</b>

Length	Matching with C/D, cw <sup>1</sup>	Matching with G/H, ccw <sup>2</sup>
	Ordering code	Ordering code
3 m	<b>1 522 348</b>	<b>1 522 394</b>
5 m	<b>1 522 349</b>	<b>1 522 395</b>
10 m	<b>1 522 350</b>	<b>1 522 396</b>
15 m	<b>1 522 454</b>	<b>1 522 447</b>
20 m	<b>1 522 456</b>	<b>1 522 461</b>
25 m	<b>1 522 457</b>	<b>1 522 462</b>
30 m	<b>1 522 464</b>	<b>1 522 463</b>

<sup>1</sup> matching with encoder connector 12 pole, cw (C/D)

<sup>2</sup> matching with encoder connector 12 pole, ccw (G/H)

Length	Ordering code
3 m	<b>1 522 405</b>
5 m	<b>1 522 404</b>
10 m	<b>1 522 340</b>

matching with encoder connector  
(BINDER) 6 pole (J, N)


Length	Matching with C/D, cw <sup>1</sup>	Matching with G/H, ccw <sup>2</sup>
	Ordering code	Ordering code
3 m	<b>1 542 003</b>	<b>1 542 010</b>
5 m	<b>1 542 004</b>	<b>1 542 011</b>
10 m	<b>1 542 005</b>	<b>1 542 012</b>
15 m	<b>1 542 006</b>	<b>1 542 013</b>
20 m	<b>1 542 007</b>	<b>1 542 014</b>
25 m	<b>1 542 008</b>	<b>1 542 015</b>
30 m	<b>1 542 009</b>	<b>1 542 016</b>
40 m	<b>1 542 026</b>	<b>1 542 028</b>
50 m	<b>1 542 027</b>	<b>1 542 029</b>

<sup>1</sup> matching with encoder connector 12 pole, cw (C/D)

<sup>2</sup> matching with encoder connector 12 pole, ccw (G/H)

## Extension cables

### EXTENSION CABLES with plug (socket) on one end

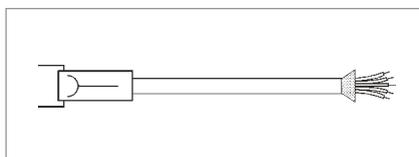

#### MIL 10 POLE FOR RI 58 (TPE CABLE)

Pin	Colour <sup>1</sup>	Lead mm <sup>2</sup>
A	brown	0.14
B	grey	0.14
C	red	0.14
D	brown/green	0.5
E	violet	0.14
F	white/green	0.5
G	green	0.14
H	pink	0.14
I	black	0.14
J	Screen	0.14

Length	Ordering code
3 m	<b>1 522 610</b>

<sup>1</sup> Cable version 3 280 112

#### CONIN 12 POLE FOR AC 58 WITH SSI-INTERFACE (TPE CABLE)

Pin	Colour <sup>1</sup>	Lead mm <sup>2</sup>
1	green	0.14
2	yellow	0.14
3	pink	0.14
4	grey	0.14
5	brown	0.14
6	white	0.14
7	black	0.14
8	blue	0.14
9	red	0.14
10	violet	0.14
11	white	0.5
12	brown	0.5
Housing	Screen	

Length	Ordering code
3 m	<b>1 543 002</b>
5 m	<b>1 543 003</b>
10 m	<b>1 543 004</b>
15 m	<b>1 543 005</b>
20 m	<b>1 543 006</b>
25 m	<b>1 543 007</b>
30 m	<b>1 543 008</b>
40 m	<b>1 543 015</b>
50 m	<b>1 543 016</b>

<sup>1</sup> matching with encoder connector  
12 pole, ccw (G/H)

<sup>1</sup> Cable version 3 280 220

#### SUB-D 37 POLE FOR AC58 WITH PARALLEL INTERFACE (TPE CABLE)

Colour <sup>1</sup>	Pin	Colour <sup>1</sup>	Pin
brown	2	white/blue	14
green	21	brown/blue	33
yellow	3	white/red	15
grey	22	brown/red	34
pink	4	white/black	16
violet	23	brown/black	35
grey/pink	5	grey/green	17
red/blue	24	yellow/grey	36

Colour <sup>1</sup>	Pin	Colour <sup>1</sup>	Pin
white/green	6	pink/green	18
brown/green	25	yellow/pink	10
white/yellow	7	green/blue	30
yellow/brown	26	yellow/blue	12
white/grey	8	red	13
grey/brown	27	white	31
white/pink	9	blue	1
pink/brown	28	black	20

<sup>1</sup> Cable version 3 280 221

Length	Ordering code
1 m	<b>1 542 163</b>
3 m	<b>1 542 020</b>
5 m	<b>1 542 021</b>
10 m	<b>1 542 022</b>
15 m	<b>1 542 172</b>

Length	Ordering code
20 m	<b>1 542 173</b>
25 m	<b>1 542 174</b>
30 m	<b>1 542 175</b>
40 m	<b>1 542 176</b>
50 m	<b>1 542 177</b>

## Extension cables

### CONIN 17 POLE FOR AC 58 WITH PARALLEL INTERFACE (PVC CABLE)

Pin	Colour <sup>1</sup>	Lead mm <sup>2</sup>
1	brown/grey	0.14
2	red/blue	0.14
3	violet	0.14
4	white/brown	0.14
5	white/green	0.14
6	white/yellow	0.14
7	white/grey	0.14
8	white/pink	0.14
9	white/blue	0.14
10	white/red	0.14
11	white/black	0.14
12	brown/green	0.14
13	pink	0.14
14	green	0.14
15	black	0.5
16	red	0.5
17	brown	0.14
Housing	Screen	

Length	Matching with W/Y, cw <sup>1</sup>	Matching with U/V, ccw <sup>2</sup>
	Ordering code	Ordering code
3 m	<b>1 540 100</b>	<b>1 540 097</b>
5 m	<b>1 540 101</b>	<b>1 540 098</b>
10 m	<b>1 540 102</b>	<b>1 540 099</b>
15 m	<b>1 540 142</b>	<b>1 540 138</b>
20 m	<b>1 540 143</b>	<b>1 540 139</b>
25 m	<b>1 540 144</b>	<b>1 540 140</b>
30 m	<b>1 540 145</b>	<b>1 540 141</b>
40 m	<b>1 540 205</b>	<b>1 540 207</b>
50 m	<b>1 540 206</b>	<b>1 540 208</b>


<sup>1</sup> matching with encoder connector  
17 pole, cw (W/Y)

<sup>2</sup> matching with encoder connector  
17 pole, ccw (U/V)

Connection diagram see AC 58,  
parallel interface with connector.

<sup>1</sup> Cable version 3280 100

### EXTENSION CABLES WITH CONNECTOR ON BOTH ENDS

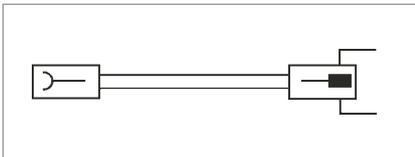

### CONIN 12 POLE FOR AC58 WITH INTERBUS-INTERFACE (TPE CABLE)

Length <sup>1</sup>	clockwise Ordering code
3 m	<b>1 542 017</b>
5 m	<b>1 542 018</b>
10 m	<b>1 542 019</b>

<sup>1</sup> Cable version 3280 220

### CABLE NOT MADE UP WITH CONNECTORS

	Ordering code
TPE cable for RI (12-core + screen)	<b>3 280 112 + length</b>
PVC cable for RI (10-core + screen)	<b>3 280 114 + length</b>
PVC cable for RI (6-core + screen)	<b>3 280 113 + length</b>
PVC cable for AC58 mit Parallel (20-core + screen)	<b>3 280 100 + length</b>
TPE cable for AC58 mit SSI od. IB-S (12-core + screen)	<b>3 280 220 + length</b>
TPE cable for AC58 mit Parallel (32-core + screen)	<b>3 280 221 + length</b>

# Measuring Wheels



## GENERAL ASPECTS




In order to prevent the result being distorted when the shaft encoder is driven by a measuring wheel make sure that the slip is as small as possible. When selecting the tread (surface), take into account the structure, stretchability, thickness, and resistance to being carried along of the material being measured.

The slip is also affected by the width of the measuring wheel, the contact pressure, the tension in the material being measured, and the arc of contact. The arc of contact should be as large as possible. The wheel bodies are made of cast aluminium or plastic (as marked).

The position of the measuring wheel should be chosen so that the direction of movement of the material is away from the shaft encoder's bearing point.

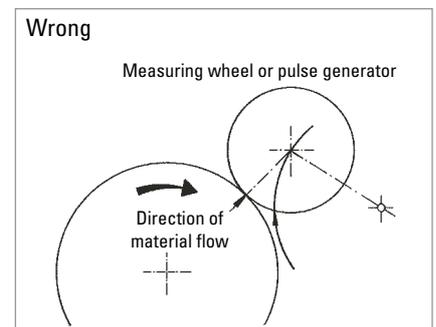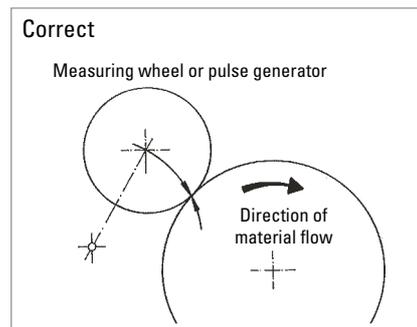


## MEASURING WHEEL TREADS

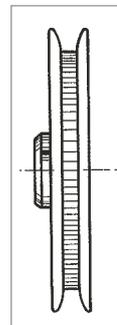


**Tread 1**  
with rim and  
fine crosshatched knurl  
Material: aluminium

Applications such as  
threads and yarns

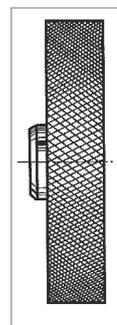

**Tread 2**  
with glued-on rubber profile  
A = soft specially clinging rubber  
surface (red)  
B = low-wear rubber surface with  
good grip (white)


Applications such as  
paper and cardboard, measuring  
cables, nongreasy metals, fleece,  
undressed or surface-treated  
wood, soft and hard plastics.

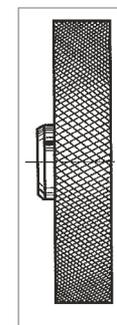

**Tread 3**  
vulcanized rubber  
surface with parallel  
knurl

Applications such as  
rubber, leather, fabrics,  
flooring and glass.


# Messräder

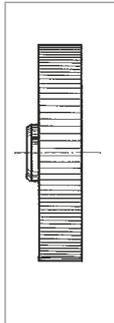

## Tread 4

aluminium with parallel knurl


Applications such as rubber, soft plastics, wood with rough surface, and to a limited extent for fabrics.

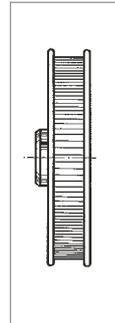

## Tread 5

with rim, aluminium with parallel knurl


Applications such as threads, yarns, and bands.

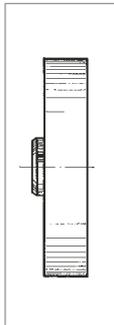

## Tread 6

plastic surface

Applications such as wire, greasy metals, and steel sections.

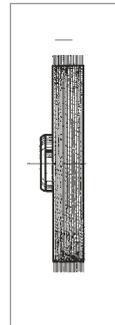

## Tread 7

carding belt

Applications such as carpets and coarse fabrics.

## ORDERING DATA Aluminium

Diameter	Circumference	Tread	Width of bearing surface mm	Bore diameter			
				4.0 mm	6.0 mm	7.0 mm	10.0 mm
6.37 cm	0.2 m	1	4	0 601 014	0 601 015	0 601 017	—
		2 A	12	0 601 018	—	—	—
		2 B	12	0 601 118	0 601 048	—	0 601 049
		2 A	24	0 601 020	—	0 601 092	—
		2 B	24	—	—	0 601 192	—
		4	20.5	0 601 023	—	—	—
		4	20	—	—	0 601 093	—
		5	16.5	0 601 026	—	0 601 094	—
15.92 cm	0.5 m	2 A	25	—	—	0 601 050	—
		2 B	25	—	—	0 601 150	0 601 151
		3	25	—	—	0 601 059	0 601 156
		4	25	—	—	0 601 121 <sup>1</sup>	0 601 157
		5	16	—	—	—	—
		6	25	—	—	0 601 063 <sup>1</sup>	0 601 163
5.73 cm	1/5 yd.	1	4	0 601 034	—	0 601 037	—
		2 A	24	0 601 042	—	0 601 095	—
		5	16.5	—	—	0 601 096	—
14.33 cm	1/2 yd.	2 A	25	—	—	—	—
		4	25	—	—	0 601 061	—
9.70 cm	1 Fuß	2 A	25	—	—	0 601 071	—
		2 B	25	—	—	0 601 171	—
		4	25	—	—	0 601 070	—

## Plastic

6.37 cm	0.2 m	1	4	0 601 100	—	—	—
15.92 cm	0.5 m	4	25	—	—	0 601 301	—
		6	25	—	—	0 601 300	—

<sup>1</sup> PTB approved

Other measuring wheels available on request

# Encoder Basics


## GENERAL INFORMATION

Incremental encoders are sensors capable of generating signals in response to **rotary movement**. In conjunction with mechanical conversion devices, such as rack-and-pinions, measuring wheels or spindles, incremental shaft encoders can also be used to measure **linear movement**. The shaft encoder generates a signal for each incremental change in position.

With the **optical transformation**, a line-coded disc made of metal, plastic or glass and positioned on a rotary bearing interrupts the infra red light ray emitted by gallium arsenid sender diode. The number of lines determines the resolution, i.e. the measuring points within a revolution. The interruptions of the light ray are sensed by the receptor element and electronically processed. The information is then made available as a rectangular signal at the encoder output.

## Output Signals of Incremental Encoders

## OUTPUT SIGNALS

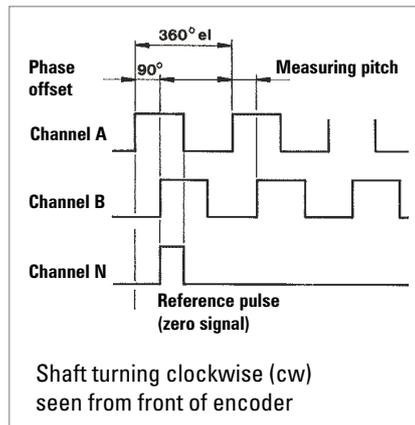

The shaft encoders supply two square wave pulses offset by 90° A and B, and a reference pulse N (zero signal) as well.


In order to suppress spurious pulses, certain output circuits (RS 422 and push-pull) generate inverted signals ( $\bar{A}$ ,  $\bar{B}$ ,  $\bar{N}$ ), such as in models RI 30, RI 36, RI 58, RI 58-H, RI 76-TD and RI 58-D.

The measuring pitch is defined as the value of the distance between two pulse edges of A and B.

## EVALUATION

The resolution of a two-channel shaft encoder can be doubled or quadrupled in the subsequent circuitry.

This enables the resolution of a two-channel encoder with 2500 lines per rev. to be increased electronically to 5,000 or 10,000 pulses per revolution (see diagram below).

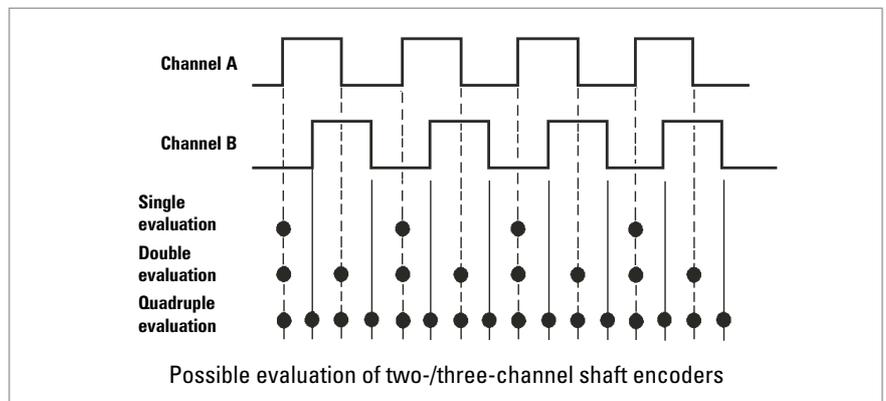

## Encoder Basics

### Maximum Speed, Protection Class

#### SPEED

The maximum permissible speed of a shaft encoder is derived from:

- the **mechanically permissible r.p.m.**,
- the minimum permissible **pulse-edge spacing** of the square-wave output signals of the shaft encoder for the subsequent circuitry, which depends on the tolerance of the phase offset,
- the **functional speed**, which is limited by the pulse frequency.

The mechanically permissible r.p.m. is specified for each shaft encoder among the mechanical characteristics.

In general, the control circuitry does not permit less than a certain **minimum edge spacing** between the square-wave output signal pulses. The minimum pulse-edge spacing is specified for each model of shaft encoder among the electrical characteristics.


The **functional speed** of an encoder is obtained by the equation:

$$n_{\max} = f_{\max} \cdot 10^3 \cdot 60 / Z$$

$n_{\max}$  = maximum functional speed [r.p.m.]

$f_{\max}$  = maximum pulse frequency of shaft encoder, or input frequency of downstream circuitry [kHz]

$Z$  = number of pulses of shaft encoder

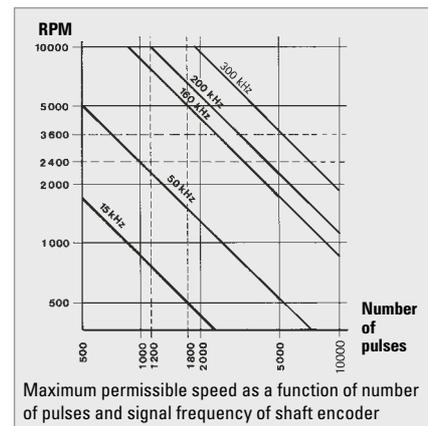

#### PROTECTION CLASS

All encoders of the industrial types RI 30, RI 36, RI 58, RI 58-H, RI 58-D, RA 70-I as well as the absolute encoders ACURO, comply with protection class IP 65 according to EN 60529 and IEC 529, unless otherwise stated.

These specifications are valid for the housing and the cable output and also for plugged in socket connectors. The shaft input complies with protection class IP 64. If however the encoder is mounted vertically, there must be no standing water present at the shaft input and the ball bearings.





In case the standard protection class IP 64 is not sufficient for the shaft input, e.g. with vertical mounting of the encoder, the encoders must be protected by additional labyrinth or pot-type seals.

On request our encoders are also available with protection class IP 67 for the shaft input and for the housing.

## Encoder Basics

### Examples of Flange Mounting

#### FLANGE TYPE OVERVIEW

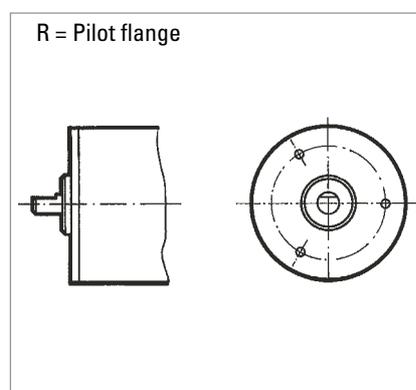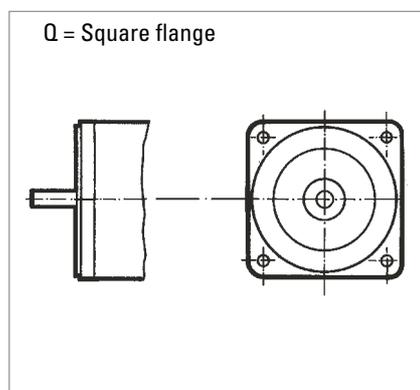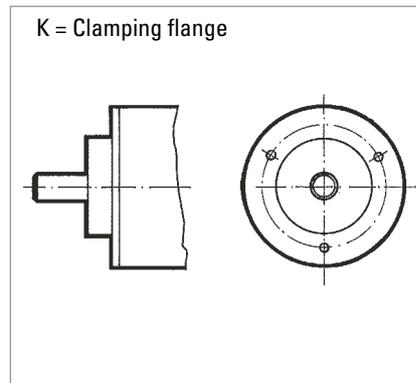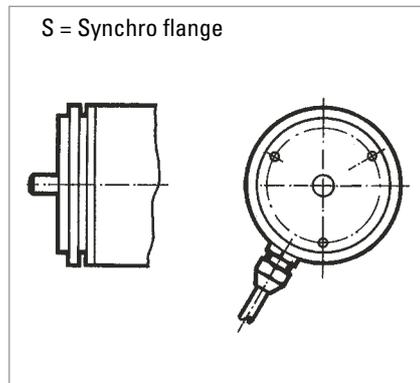


#### SHAFT ENCODERS WITH CLAMPING FLANGE

The shaft encoders with a clamping flange can be installed in following ways:

- by means of various flange adapters (see "Accessories"),
- by means of the clamping flange itself,
- by means of the fastening threads provided on the face,
- by means of an angle bracket (see "Accessories").

The encoder housing is centered by means of the clamping flange.

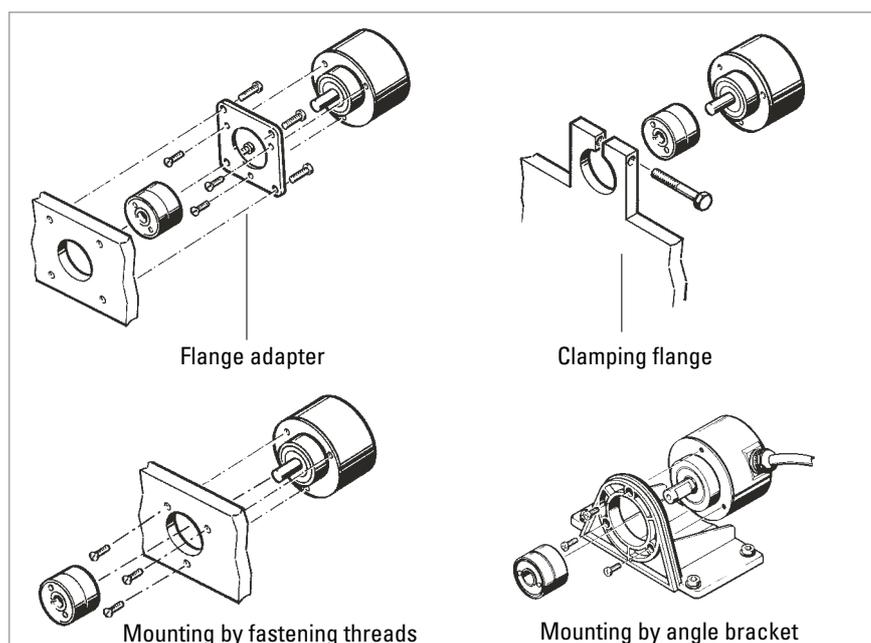

## Encoder Basics


### Examples of Flange Mounting

#### SHAFT ENCODERS WITH SYNCHRO FLANGE

The shaft encoders with synchro flange can be installed in two ways:

- by means of the synchro flange and three clamping eccentrics (see "Accessories"),
- by means of the fastening threads provided on the face.

The encoder is centered by means of the centering collar on the flange.

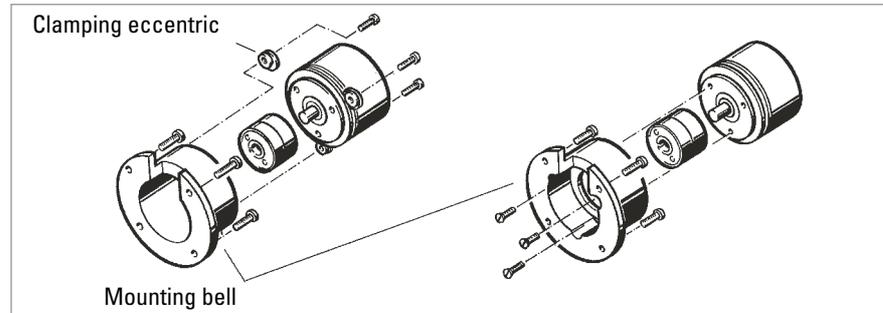


#### SHAFT ENCODERS WITH SQUARE FLANGE

The shaft encoders with square flange can be installed in two ways:

- by means of the fastening threads provided on the face,
- by means of an angle bracket.

The encoder is centered by means of the centering collar on the flange.

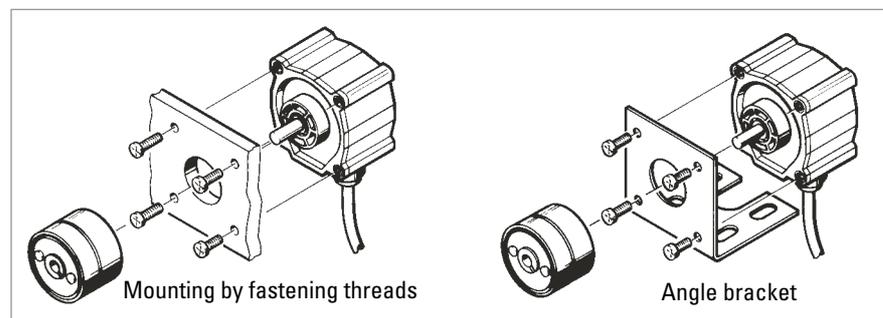


#### SHAFT ENCODERS WITH PILOT FLANGE

The shaft encoders with pilot flange can be installed in two ways:

- by means of the fastening threads provided on the face,
- by means of an angle bracket.


The encoder is centered by means of the centering collar on the flange.

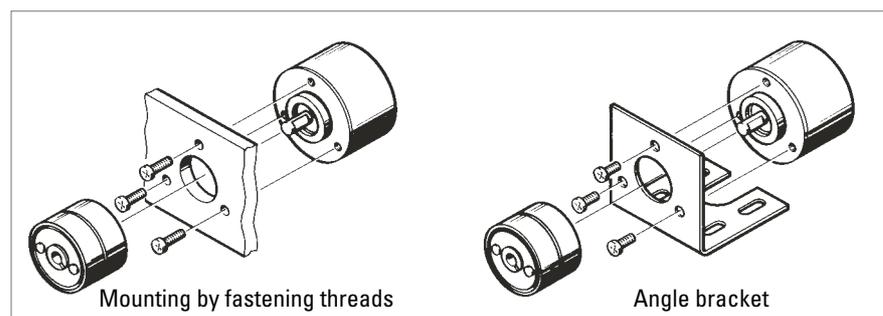

## Encoder Basics


### Examples of Flange Mounting

#### SHAFT ENCODERS WITH HOLLOW SHAFT (RI 58-D/G)

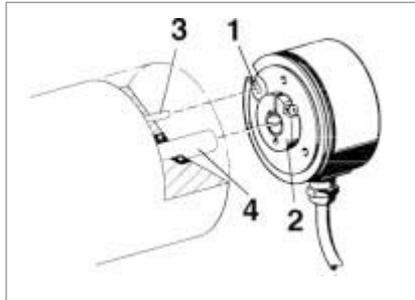

Mounting of version F, D (Clamping shaft)


- 1 Torque support
- 2 Clamping ring with cross-recess screw
- 3 Straight pin
- 4 Actuating shaft

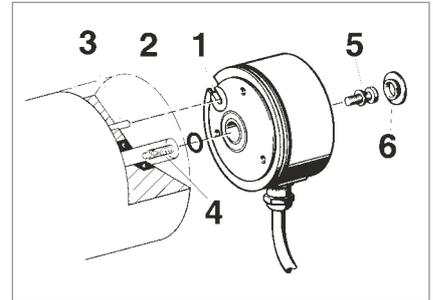


Mounting of version E (Blind shaft)

- 1 Torque support
- 2 O-ring
- 3 Straight pin
- 4 Actuating shaft with threaded bore
- 5 M4-screw with spring washer
- 6 Cap

#### SHAFT ENCODERS WITH HOLLOW SHAFT (RI 76, RI 80-E, AC110)

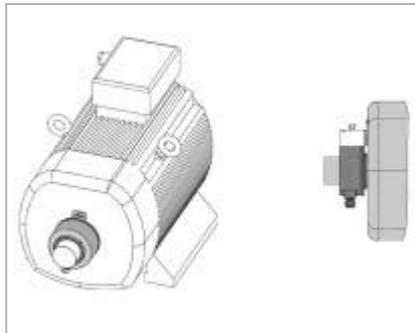

#### MOTOR SHAFT ENCODERS WITH HOLLOW SHAFT (E9, M9)

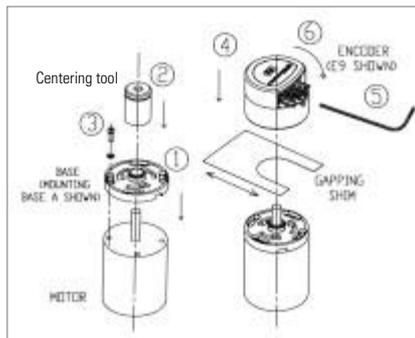

1. Place the base plate of encoder onto the motor rear end plate.
2. Install centering tool on motor shaft to center the base plate with respect to the shaft.
3. Install hardware supplied and tighten to secure the base plate. Remove centering tool.
4. Position and mount the encoder housing onto the base plate with its 3x120° bayonet snaps in their corresponding slots on the base plate. Slide the gapping shim between the base plate and the encoder from the side opposite the connector.
5. Place the hex wrench into the codewheel set screw. Tighten the set screw while pushing the codewheel down toward the gapping shim with the wrench.
6. Remove the gapping shim, push down and twist the encoder 30° clockwise to lock it in place.


#### SHAFT ENCODERS WITH SOLID SHAFT

Connection of solid-shaft encoders to the shaft is by means of a coupling. The coupling compensates for axial movements and lack of alignment between the shaft encoder and the drive shaft, thus preventing excessive bearing loads on the encoder shaft. For further details please refer to chapter "Accessories".

# Basics of Incremental Encoders

## Outputs - RS 422 - TTL

### OUTPUT CIRCUIT

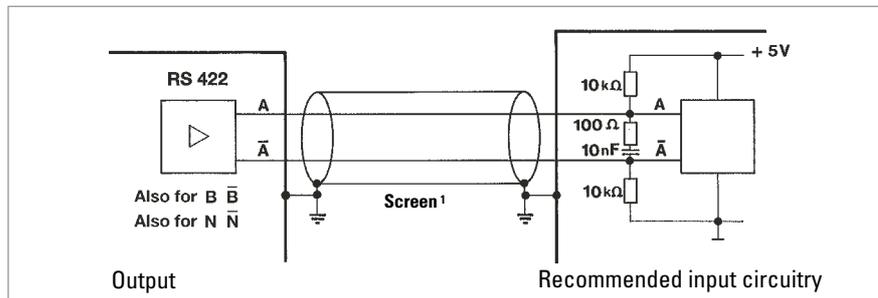

<sup>1</sup> Cable screen:

- not existing for RI 32, 38, 42,
- connected to encoder housing for RI 30, 36, 58, 59, 76 and RA 70

### TECHNICAL DATA

Code letter	R = RS 422 + Alarm <sup>3</sup> (with $U_B = DC 5/10 - 30 V$ ) T = RS 422 + Sense <sup>4</sup> (only with $U_B = DC 5 V$ )
Output signals shaft turning clockwise (cw) seen from front of encoder	<p>Square wave pulses (TTL) for channels A, B, N and their inverted signals <math>\bar{A}</math>, <math>\bar{B}</math>, <math>\bar{N}</math></p>
Delay times at 1,5 m cable	<p><math>\leq 100 \text{ ns} \leq 100 \text{ ns}</math></p>
Pulse shape	
Pulse duty factor	1:1
Phasing	$90^\circ \pm 25^\circ$ electrical
Symmetry	$180^\circ \pm 25^\circ$ electrical
Max. Output frequency	300 kHz
Output voltage	DC 0 ... +5 V <sup>2</sup>
Output level	$H \geq DC 2,5 V / L \leq DC 0,5 V$ (TTL-level)
Output load max.	$\pm 30 \text{ mA}$
Short circuit protection	with $U_B = DC 5 V$ : only 1 channel at a time for max. 1 s (Standard RS 422-driver) with $U_B = DC 10 - 30 V$ : short circuit proof for all channels due to integrated controller
Pole protection of $U_B$	with $U_B = DC 5 V$ : no      with bei $U_B = DC 10 - 30 V$ : yes

<sup>1</sup> Distance A to B is at least 0,45  $\mu s$  (at 300 kHz)

<sup>2</sup> also for  $U_B = DC 10 - 30 V$

<sup>3</sup> Description - see Outputs Alarm

<sup>4</sup> Description - see Outputs Sense

### CABLE LENGTH

depending on voltage and frequency (at 25 °C) <sup>1</sup>:


Length	RS 422
10 m	DC 5 V, 300 kHz
50 m	DC 5 V, 300 kHz
100 m	DC 5 V, 300 kHz

<sup>1</sup> with Hengstler accessory cables

# Basics of Incremental Encoders

## Outputs - Push-pull

### OUTPUT CIRCUIT

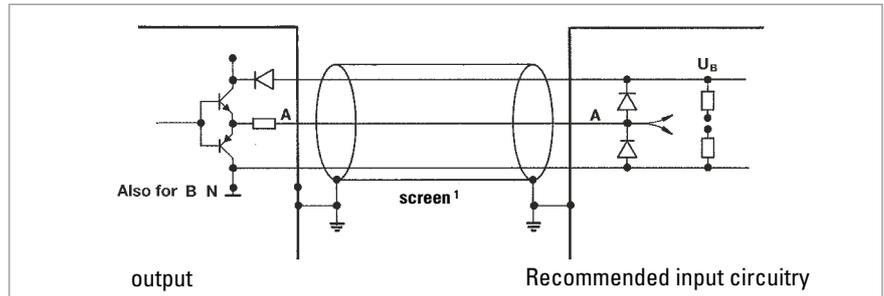

<sup>1</sup> Cable screen:

- not existing for RI 32, 38, 42
- Not connected to encoder housing for RI 41
- Connected to encoder housing for RI 30, 36, 58, 59, 76 and RA 70

### TECHNICAL DATA

Code letter	K = push-pull, 10 mA with $U_B = DC 5 V$ or push-pull, 30 mA with $U_B = DC 10 - 30 V$ D = push-pull, 30 mA with $U_B = DC 5 V$		
Output signals shaft turning clockwise (cw) seen from front of encoder			
Delay times at 1,5 m cable	<ul style="list-style-type: none"> <li><math>\leq 100 \text{ ns}</math> (DC 5 V, push-pull D)</li> <li><math>\leq 250 \text{ ns}</math> (DC 5 V, push-pull K)</li> <li><math>\leq 2 \mu\text{s}</math> (DC 10 - 30 V, push-pull K)</li> </ul>		
Pulse shape			
Pulse duty factor	1:1		
Phasing	$90^\circ \pm 25^\circ$ electrical		
Symmetry	$180^\circ \pm 25^\circ$ electrical		
Max. Output frequency	300 kHz (see cable length)		
Output voltage	$0 \dots + U_B$		
Output level	K	K	D
	push-pull (10 - 30 V)	push-pull (5 V)	push-pull (5 V)
	$H \geq U_B - 3V$	$H \geq 2,5 V$	$H \geq 2,5 V$
	$L \leq 2 V$	$L \leq 0,5 V$	$L \leq 0,5 V$
Output load max.	$\pm 30 \text{ mA}$	$\pm 10 \text{ mA}$	$\pm 30 \text{ mA}$
Short circuit protection	all channels	all channels	1 channel <sup>2</sup>
Pole protection of $U_B$	yes	yes	no

<sup>1</sup> Distance A to B is at least  $0,45 \mu\text{s}$  (at 300 kHz)

<sup>2</sup> only 1 channel at a time for max. 1 s

### CABLE LENGTH


depending on voltage and frequency (at 25 °C) <sup>1</sup> :			
Length	push-pull (K) DC 5 V, 10 mA	push-pull (D) DC 5 V, 30 mA	push-pull (K) DC 10 - 30 V, 30 mA
10 m	300 kHz	300 kHz	DC 12 V, 200 kHz DC 24 V, 200 kHz DC 30 V, 200 kHz
50 m		300 kHz	DC 12 V, 200 kHz DC 24 V, 200 kHz DC 30 V, 100 kHz
100 m		300 kHz	DC 12 V, 200 kHz DC 24 V, 100 kHz DC 30 V, 50 kHz

<sup>1</sup> with Hengstler accessory cables

# Basics of Incremental Encoders

## Outputs - push-pull complementary

### OUTPUT CIRCUIT

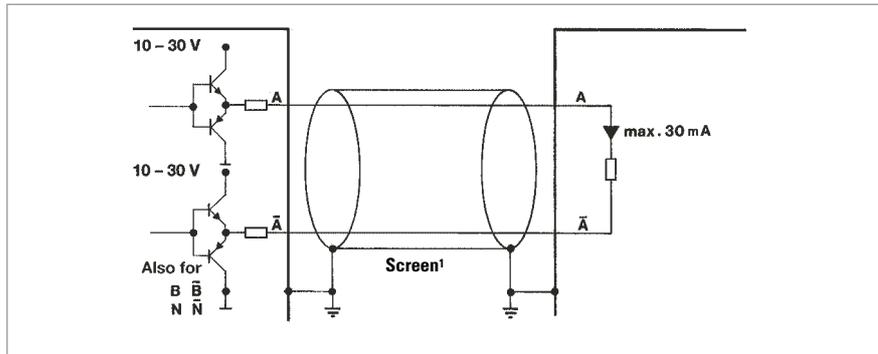

<sup>1</sup> cable screen connected with encoder housing

### TECHNICAL DATA

Code letter	I = push-pull complementary (with $U_B = 10 - 30 \text{ V}$ )
Output signals shaft turning clockwise (cw) seen from front of encoder	<p>Square wave pulses (HTL) for channels A, B, N and their inverted signals <math>\bar{A}</math>, <math>\bar{B}</math>, <math>\bar{N}</math></p>
Delay times at 1,5 m cable	<p><math>\leq 250 \text{ ns}</math> <math>\leq 250 \text{ ns}</math></p>
Pulse shape	
Pulse duty factor	1:1
Phasing	$90^\circ \pm 25^\circ$ electrical
Symmetry	$180^\circ \pm 25^\circ$ electrical
Nax. output frequency	200 kHz (see cable length)
Output voltage	$0 \dots + U_B$
Output level	$H \geq U_B - 3 \text{ V} / L \leq 2 \text{ V}$
Output load max.	$\pm 30 \text{ mA}$
Short circuit protection	short circuit proof for all channels due to integrated controller
Pole protection of $U_B$	yes

<sup>1</sup> Distance from A to B is at least  $0,7 \mu\text{s}$  (at 200 kHz)

### CABLE LENGTH


depending on voltage and fequency (at $25^\circ \text{ C}$ ) <sup>1</sup> :	
Length	push-pull complementary
10 m	DC 12 V, 200 kHz
	DC 24 V, 200 kHz
	DC 30 V, 200 kHz
50 m	DC 12 V, 200 kHz
	DC 24 V, 50 kHz
	DC 30 V, 25 kHz
100 m	DC 12 V, 150 kHz
	DC 24 V, 25 kHz
	DC 30 V, 12 kHz

<sup>1</sup> with Hengstler accessory cables

# Basics of Incremental Encoders

## Outputs - Alarm

### OUTPUT CIRCUIT

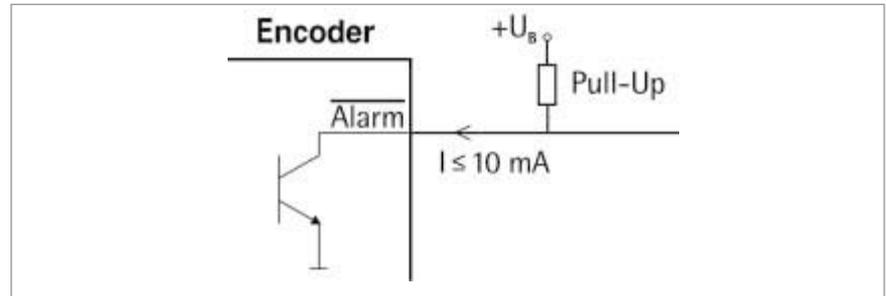

### TECHNICAL DATA

Output	NPN - Open collector
Output load max.	5 mA / 24 V at $U_B = DC 5 V$ 5mA / 32 V at $U_B = DC 10- 30 V$
Output level	Output active (failure condition): $L \leq DC 0,7 V$ Output inactive: high impedance (if necessary: get H-level by an external pull-up resistor)
Malfunction indication time	$\geq 20 ms$

### FUNCTION

The rotary encoders are equipped with an electronic monitoring system that reports potential malfunctions via a separate alarm output.

The alarm output can be used for selecting an optical display (LED; for circuit, see above) or the control system (SPC or similar).

Moreover, the alarm outputs of several encoders can be interconnected to a common "systems alarm" by means of a parallel connection. The following errors are indicated:

Category I	Category II	Category III
- damaged disks	- overtemperature	- voltage range $1 VDC < U < 4 VDC$
- defective LED	- overload (e. g. due to short circuit)	- voltage drop on the supply lines
- contamination		

Category I malfunctions cannot be corrected; the encoder must be replaced.

Category II malfunctions are detected by means of a thermal monitoring unit in the electronic system. The alarm message is cleared after the cause of temperature increase has been removed.

Category III malfunctions indicate insufficient supply voltage. Also included in this category are transients in the supply voltage, e.g. due to electrostatic discharge, which may distort the output signals.


This is corrected by

- readjustment to the correct voltage
- eliminating the cause of disturbance, i.e. by careful arrangement of the cables.

## Basics of Incremental Encoders

### Outputs - Sense at 5 V RS 422 (T)

#### OUTPUT CIRCUIT

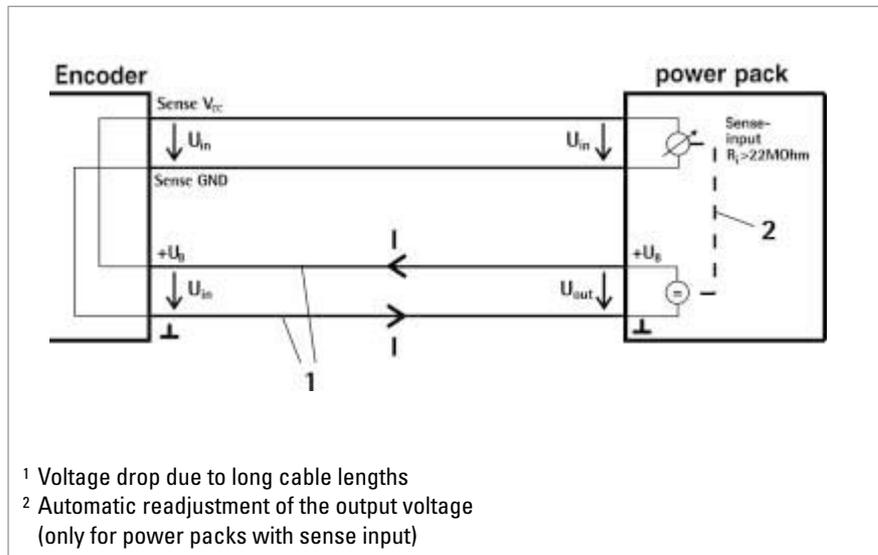

#### FUNCTION

The sense wires enable measuring of the actual encoder supply voltage (compensates for voltage drops due to supply current and cable resistance).

Due to the voltage drop in the cables and the voltage supply, the encoder input voltage  $U_{in}$  is less than the power pack output voltage  $U_{out}$ .


The present input voltage  $U_{in}$  is now output to the Sense  $V_{CC}$  and Sense GND cables and returns as data to the power pack.

The input resistance  $R_i$  on the power pack should amount to at least 22 M $\Omega$  so that no voltage drop occurs on these cables.

In case of power packs with sense input, it is now possible to readjust the output voltage  $U_{out}$  automatically.

## Basics of Sine-Wave Encoders

### GENERAL INFORMATION

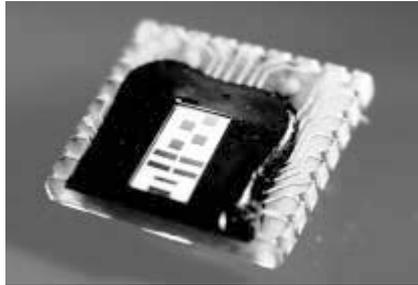

### SINE-WAVE OPTOASIC TECHNOLOGY BURSTS THE LIMITS

With the introduction of the sine-wave encoder family, Hengstler has taken the opportunity to significantly rework its OptoAsic technology.

The best features have been maintained and new improvements have been introduced. One major feature that has been retained of course, is the high level of EMC reliability which we have achieved by integrating almost the complete encoder electronics into one component.

What is new is the integrated offset and amplitude control together with the in-chip optical system adjustment. In the past anybody wanting high quality, accurate sine-wave signals at low frequencies had to trade in this for bandwidth. We are now able to meet this apparently contradictory requirement with our in-built amplitude control. You can't fail to be convinced by a unit which delivers sine-wave signal with harmonic distortion better than 1% at low speed and 500 kHz max. frequency.

**The advantages are crystal clear:** If you need precision at slow speeds you no longer have to compromise your productivity because the encoder limits the maximum speed of your machine e.g. for tool changing processes. You can have both - accuracy and speed.

### APPLICATIONS


#### Typical applications:

- Machine tools
- Printing machines
- Gearless elevators
- Drives

# Basics of Sine-Wave Encoders


## Signals

### THE RIS58 SIGNALS

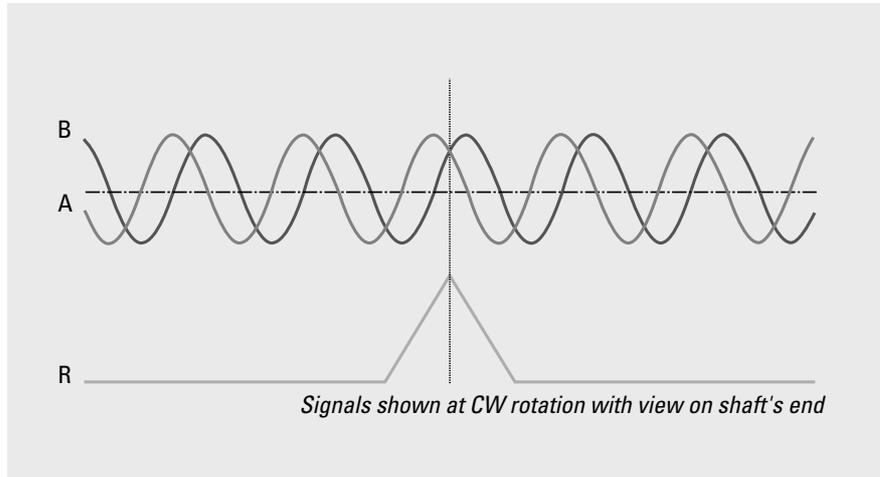

The incremental signals A and B and the zero signal R are differential voltage signals. The differential signal level is 1 Vpp. The zero signal appears once per revolution with a peak of 0.4 V and reaches its maximum value at the angle where the amplitudes of the A and B signals are equal. All signals have a DC-offset of 2.5 V.

### THE RIS58 SIGNAL QUALITY

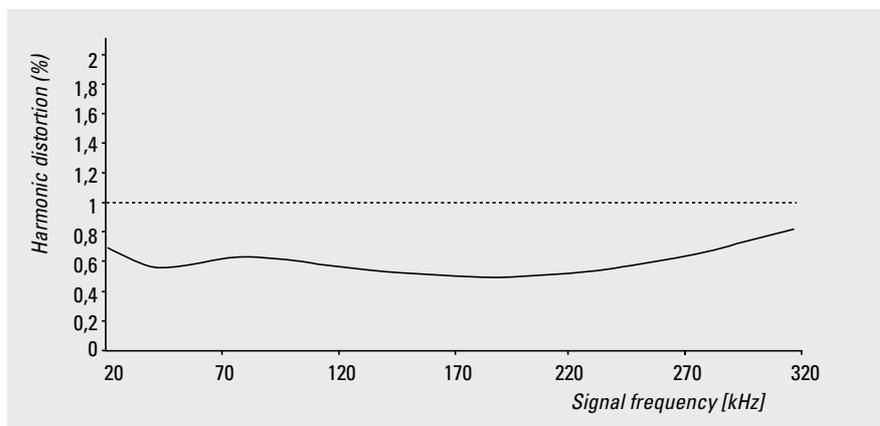

The quality of the servo loop is determined to a large extent by the absence of harmonics in the encoder's sinewave signals, particularly at low speed. In order to achieve high interpolation factors in the sequencing control, the incremental sine signals A and B are available with a harmonic distortion significantly under 1% throughout the specified temperature range. This delivers excellent synchronism and a high level of positional accuracy with servo axes.

## Basics of Absolute Encoders ACURO

### ABSOLUTE ENCODERS FOLLOW THE LATEST TREND: CHANGE EASILY TO ACURO

Absolute encoders save costs and provide enhanced safety - facts that are obviously important in complex installations and multi-axis machinery: Time-consuming reference runs after powering-up the supply voltage have become a thing of the past for absolute encoders. Hazardous conditions caused by reference runs (which are always necessary with incremental encoders) can be prevented right from the start. Absolute encoders - too large, too expensive?

A prejudice that is cleared up by ACURO. Even the multi turn version of ACURO is no larger than most incremental encoders and costs less than you would expect. And how about reliability? Due to their complexity, absolute encoders seem to be susceptible to faults. No problem with ACURO: once installed they will not cause trouble, due to the highest integration density and use of extremely reliable technologies to ensure safe and reliable long-term operation.

### The platform concept

Hengstler's new ACURO absolute encoders feature innovative technology, simple operational and optimal functional safety. Their platform concept also allows especially compact dimensions with a modular design, which always ensures the right version for each individual application in the field of motor feedback and automation engineering. Equipped with the new open BiSS interface these encoders are a good and future oriented investment.

The mechanical construction of ACURO is rugged and precise. Double high-precision ball bearings guarantee reliable long-term operation even at speeds of up to 12000 rpm. ACURO is equipped with the commercially available mechanical interfaces, including solid shaft or hub shaft, synchro-flange or clamping flange.

### ABSOLUTE ENCODERS ARE DIFFERENTIATED ACCORDING TO:

#### Singleturn version

1 revolution (= 360 °) is coded in n steps. After a rotation of over 360 ° the code is repeated.


#### Multiturn version

Apart from measuring 360 ° (1 revolution) further coded revolutions can be recorded e.g for applications in combination with lead screws or timing belts. Hengstler is using the principle of a mechanical memory (gearbox, which is unmatched in reliability and EMC).

## Basics of Absolute Encoders ACURO

### High-Tech Features in a Modular System

#### INNOVATIVE TECHNOLOGY

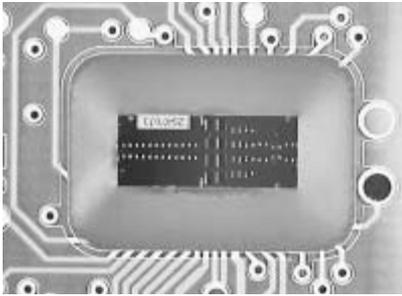

Hengstler's ACURO series comprises a complete range of absolute encoders, all in OPTOASIC technology. OPTOASIC units combine all required optical and electronic components in only one silicon chip.

This new technology is tailored to the user's needs and offers advantages previously unknown in the field:

- **High degree of reliability** due to differential scanning and single-step Gray code.
- **Fail-safe** due to the elimination of more than a hundred components
- **Long serviceable lifetime** due to state-of-the-art semiconductor technology-

- High degree of **electromagnetic compatibility** due to elimination of macroscopic low-current paths.

Our new absolute shaft encoders have an excellent price/performance ratio. As a further feature the encoders are fully backward compatible due to identical mounting flanges and electrical interfaces.

This makes it easy for the user to switch from incremental to absolute shaft encoders.

#### PROGRAMMABLE ABSOLUTE SHAFT ENCODERS

All essential parameters are user-programmable.

Additional advantages are uncomplicated subsequent data processing, electronic adjustment and add-on optimization of mechanical systems which are subject to tolerances.

Furthermore, storage and maintenance are more cost-efficient: the same encoder may be used for a variety of applications and assigned to its task at the place of installation.

#### APPLICATIONS

The new encoders are, for example, perfectly suited to determine angular positions in automated systems with reliable and precise operation.

Absolute encoding eliminates the need for a reference run after interruptions (such as power failures).

ACURO is the right match for a wide range of applications - from medical technology, elevators, all printing, paper processing or metal-processing machinery, such as presses and saws, right through to highly-dynamic drives.

#### INTERFACES



Of course, the user has a selection of the most advanced interface technology available:

- Tristate parallel drivers  
The symmetrical push-pull drivers are fully short circuit proof, overload protected and polarity protected in a range from 10 to 30 V.  
Parallel bus systems are easy to realize. So you save in cabling expenses.
- CAN  
Bus specifications according to CAN High-Speed ISO/DIS 11898 for transfer rates up to 1 MBaud.
- Suconet K1  
Klöckner-Moeller 2 wire fieldbus
- DeviceNet
  - Based on CAN layer 2 (data link layer)
  - Up to 64 nodes and 500 Kbaud speed
  - Configuration via network

- INTERBUS  
Interface including the potential-free power supply is already integrated in the housing with a diameter of only 58 mm.
- SSI  
The encoders can also be supplied with synchronous-serial interface (SSI) which is available worldwide.  
This allows trouble-free connection to commercial processing components.
- Profibus DP  
Protocol according to encoder profile class C2 (programmable)
- BiSS
  - bidirectional and fully digital
  - synchronous serial data
  - licence-free
  - up to 8 slaves per master

# Basics of Absolute Encoders ACURO

## Open Digitale Sensor Interface (BiSS)

### GENERAL INFORMATION

The bidirectional digital sensor interface BiSS safeguards communication between position encoders or measuring devices and industrial controls, such as a drive control, for example, and if necessary can transmit measurement values from up to 8 sensors simultaneously.

**For 1 to 8 subscribers** the interface master provides a clock signal for the simultaneous capture of all position data and for the synchronous-serial data transmission which

follows on from this. Just four unidirectional RS422 data lines are required; the slave electronics, kept to an absolute minimum, are incorporated on the sensor ICs.

When the master sends a clock pulse on line MA, the slave answers directly on return line SL with the recorded position data. Commands and parameters can be swapped on a PWM pulse form; this is, however, not necessary to start the BiSS protocol.

### TRANSFER SEQUENCE


**With each data cycle** the master learns and compensates for line delays, thus permitting clock rates of up to 10 Mbit/s even for cable lengths of up to 100 m. Changes in line conditions which occur during cable drag, for example, are corrected. The precision of synchronization among several position encoders along various axes is less than 1 microsecond; the master also makes the signal delay it has recorded accessible to the control unit, allowing further optimization.

**The BiSS protocol** classifies each subscriber in one of the following data sections: sensor data, multi cycle data or register data. These data sections have various setups with regard to access and transmission performance so that a number of different sensor applications are catered for. Bidirectional parameter communication for device configuration - also applicable to what are known as OEM parameters - is

usually consigned to the register data section. Data which alters gradually, such as revolution counts or drive temperatures, is allocated to the multi cycle data section, with rapidly changing angle data being assigned to the sensor data section.

**Control cycle times of less than 10  $\mu$ s** are thus not a problem, even for data words of up to 64 bits in length. There is enough room in the protocol for redundancy; this space is normally used to implement a CRC (cyclic redundancy check). Framed by just one start and one stop bit, the sensor data is transmitted at the best-possible core data rate; a single multi cycle data bit is optional. Also captured when triggered, the multi cycle data bits make up a second in-band protocol which helps to increase the efficiency of the sensor data; permanent monitoring of the position and operation of the drive is possible without interfering with the control cycle.

### Circuit diagram of an absolute encoder

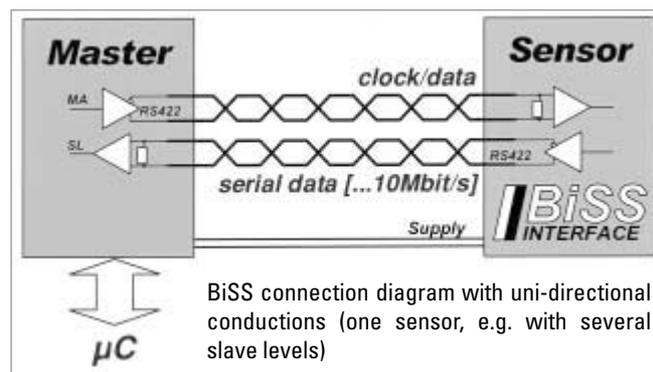

### Configuration

**Specific product developments** of individual users are not restricted or made unnecessarily expensive by a compulsory compatibility.

A BiSS subscriber is described with just a few parameters and the XML-descriptive file included with the delivery simplifies start up of the control system.

**i** For further information see: [www.biss-interface.com](http://www.biss-interface.com)

# Basics of Absolute Encoders ACURO

## Synchronous-Serial Interface (SSI)

### GENERAL INFORMATION

In many cases, absolute shaft encoders are subject to severe mechanical stresses and to electrical and magnetic fields that contaminate the site.


Therefore, special design measures are needed to combat dirt, dust and liquids in industrial environments.

Our absolute shaft encoders are of state-of-the-art rugged mechanical construction, and the electronic components are very compact.

A main consideration for immunity to interference is the data transfer from the shaft encoder to the control system. The control system must be able to read the readings from the shaft encoder without errors. Under no circumstances should undefined data be transmitted, for example at the changeover point.

The major differences between the concept of synchronous-serial data transfer for absolute shaft encoders described here and parallel and asynchronous serial forms of data transfer are:

- less electronic components
- less cabling for data transfer
- the same interface hardware, regardless of the absolute shaft encoder's resolution (word length)
- electrical insulation of the shaft encoder from the control system by optocouplers
- open-circuit monitoring by constant current
- data transfer rates up to 1.5 megabits per second (depending on the length of line)
- ring-register operating possible.

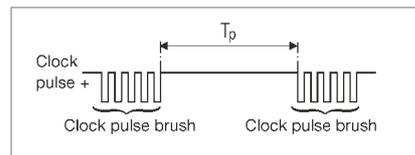

### TRANSFER SEQUENCE


For correct transfer of the data a defined number of pulses (clock pulse brush) must be applied to the clock input of the absolute shaft encoder. Next, a pause  $T_p$  must be observed. As long as no clock signal is applied to the shaft encoder, its internal parallel/serial shift register remains switched to parallel. The data change continuously, corresponding to the current position of the shaft encoder's shaft.

As soon as a clock pulse brush is applied to the clock input again, the instantaneous angular data is recorded.

The first shift of the clock signal from high to low <sup>①</sup> actuates the shaft encoder's internal retriggerable mono-stable element, whose storage time  $t_m$  must be greater than the clock signal's period  $T$ .


The output of the monostable element controls the parallel/serial register via terminal P/S (parallel/serial).

### Block diagram of an absolute shaft encoder

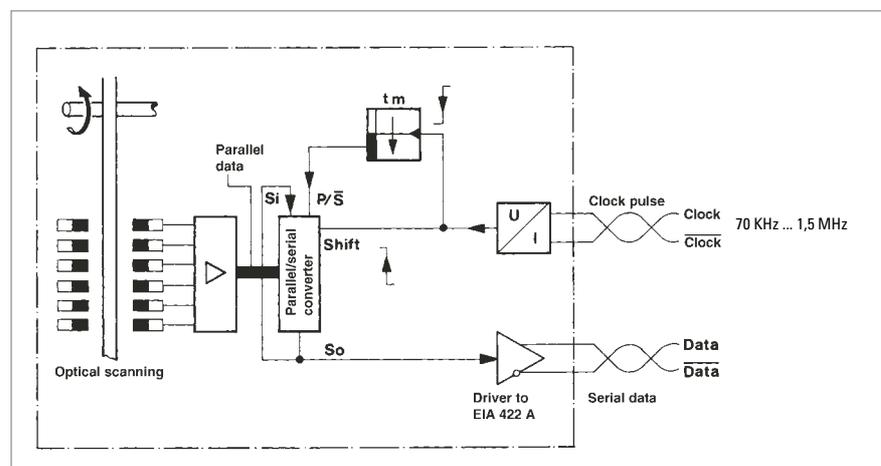

# Basics of Absolute Encoders ACURO

## Synchronous-Serial Interface (SSI)

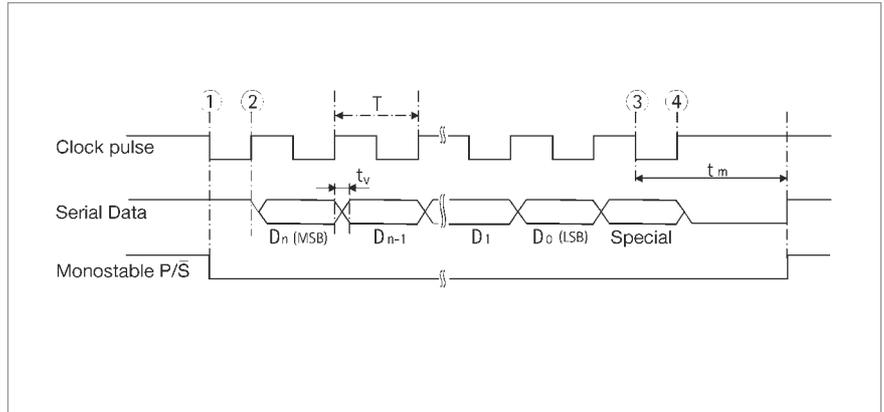

$T$  = clock pulse period  
 $t_m$  = storage time of monostable element  
 $t_m$  ranging from 10  $\mu$ s to 30  $\mu$ s  
 $t_v$  = 100 ns

The number of clock pulses necessary for data transfer is independent of the resolution of the absolute shaft encoder.

The clock signal can be interrupted at any point, or continued in ring-register mode for repeated polling.

With the first shift of the clock signal from low to high ② the most significant bit (MSB) of the angular data is applied to the shaft encoder's serial output.



With each succeeding rising edge, the next less significant bit is shifted to the data output.

After transmission of the least significant bit (LSB) the Alarm bit or other special bits are transferred, depending on configuration. Then the data line switches to low ③ until the time  $t_m$  has passed.

A further transfer of data cannot be started until the data line switches to high ④ again. If the clock pulse sequence is not interrupted at point ③, the ring-register mode is activated automatically. This means that the data stored at the first clock pulse transition ① are returned to the serial input  $S_i$  via the terminal  $S_0$ . As long as the clock pulse is not interrupted at ③, the data can be read out as often as wanted (multiple transfer).

# Basics of Absolute Encoders ACURO

## Synchronous-Serial Interface (SSI)

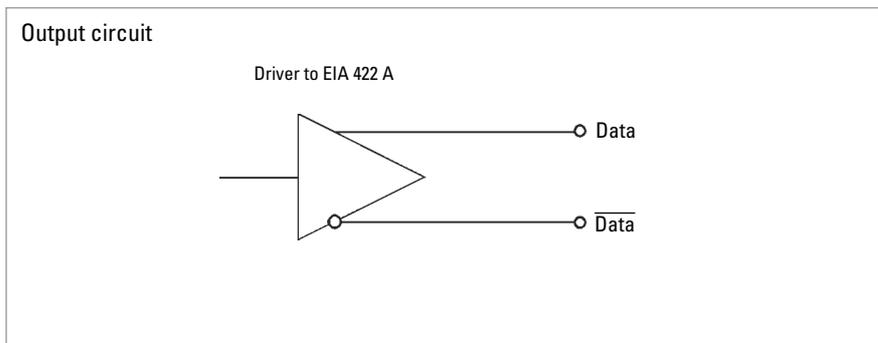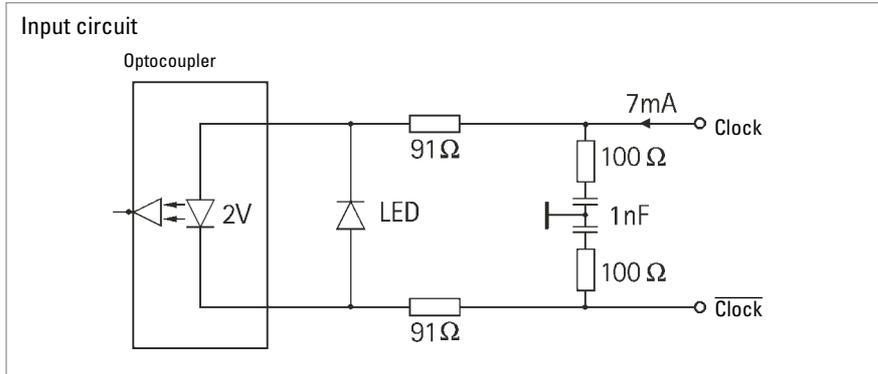

### RECOMMENDED DATA TRANSMISSION RATE

The maximum data transmission rate depends on the length of cable:

Cable length	Baud rate
< 50 m	< 400 kHz
< 100 m	< 300 kHz
< 200 m	< 200 kHz
< 400 m	< 100 kHz

# Basics of Absolute Encoders ACURO


## INTERBUS

### GENERAL INFORMATION

INTERBUS is a real-time bus for the sensor-actor-level which is able to transfer data with a small overhead in a range of up to 4 bytes per subscriber for a maximum of 256 subscribers.

It is characterized by a circular transmission with a fixed message frame and a central master (e.g. SPC switching-in assembly).

### TRANSFER SEQUENCE

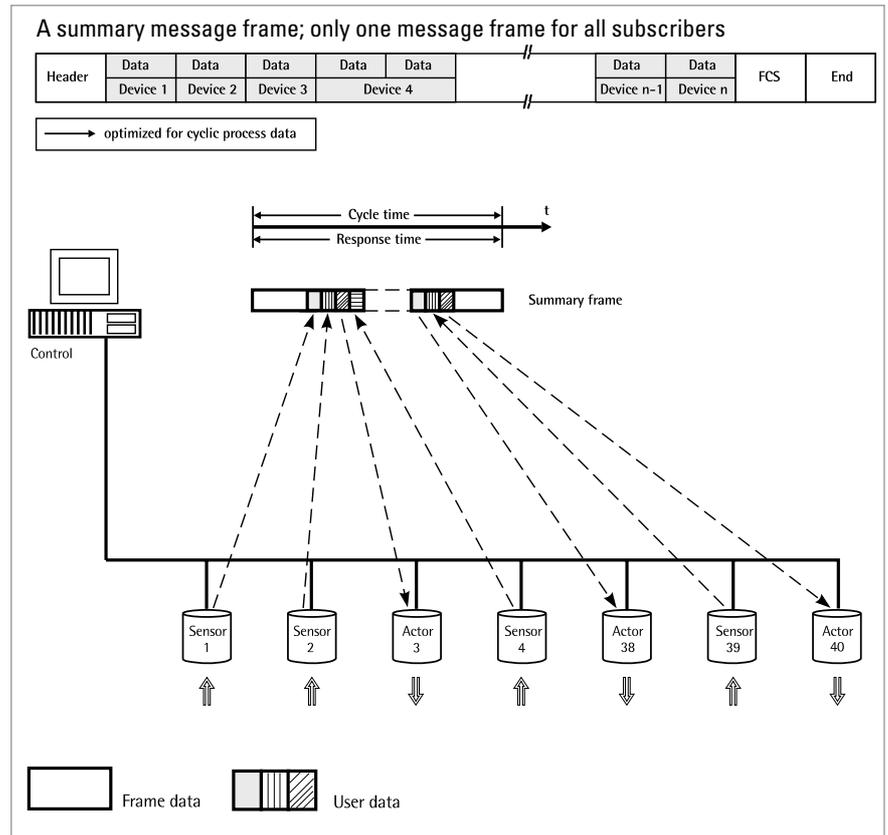

### WHAT ARE THE BENEFITS OF INTERBUS COMPARED WITH A CONVENTIONAL SYSTEM WIRING?

- Lower costs for cables and wiring
- Lower noise sensitivity
- Many control signals which were analog before are now available as digital signals and directly transferable by INTERBUS
- Simple layout, installation and starting procedure
- High efficiency (net data rate): the percental share of the message header and of the terminating sequence decreases with a growing number of subscribers
- Data of all subscribers are stored at the same time and transferred sub-sequently
- Reaction time can easily be determined. It only depends on the system's total extension; this is important for controlling tasks
- Constant sampling rate for reference inputs and actual values; both are transferred in one bus cycle
- Considerations of priority are unnecessary since all subscribers have the same priority

## INTERBUS

- No system-parameter definition before starting procedure
- Data integrity is secured by 16-bit-CRC (according to CCITT polynomial) done for each transmission
- Sophisticated diagnostic software for the central bus controller: a point of error can specifically be isolated; in each case of malfunction there is a possibility to close the circular system in every single bus clip.

Encoder manufacturers are joined together in the ENCOM user group; drive manufacturers in DRIVECOM.

The user groups shall maximize the benefit for the customer by standardization of data transmission.

There is a high availability of devices with INTERBUS interface, and the bus mode has already been successful in industrial use.

Devices with an INTERBUS interface for process control are now available from more than 200 manufacturers.

### ENCOM USER GROUP



**The following device classes defined by ENCOM are used for absolute shaft encoders:**

**Class 2 (K2):**

- 32-bit process data
- Binary
- Right-justified
- Readable only
- No control bits or status bits


**Class 3 (K3):**

- 32-bit process data
- Coded according to manufacturer specifications
- Right-justified
- 7 status bits and control bits

# Basics of Absolute Encoders ACURO

## INTERBUS

### TECHNICAL DATA

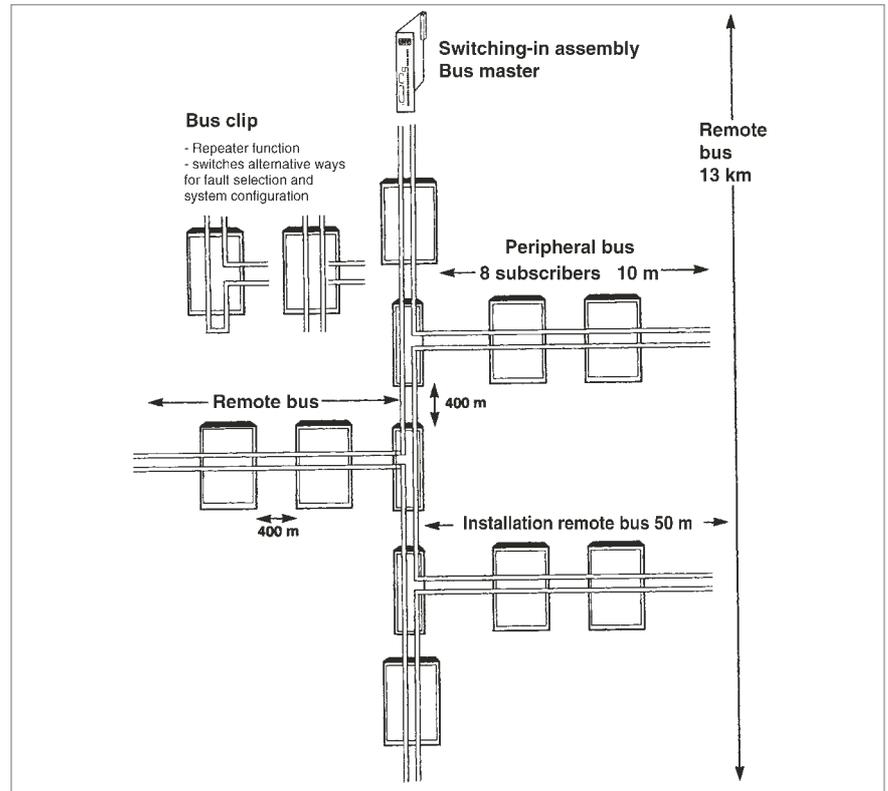

INTERBUS is physically divided into:

#### Remote bus

- Voltage difference transmission RS 485
- Max. cable length between two bus clips: 400 m
- Max. overall cable length of remote bus: 13 km
- A maximum of 64 bus clips/modules may be directly connected to the remote bus

#### Peripheral bus

- 5 V voltage interface
- Max. overall cable length of peripheral bus: 10 m
- A maximum of 8 modules may be connected


#### Installation remote bus

- For modules with enclosure class IP 65 (e.g. HENGSTLER absolute shaft encoders)
- Voltage difference transmission RS 485
- Max. overall cable length: 50 m
- Connection via bus clip or passive T-manifold
- Each subscriber has an electrically isolated voltage transformer
- 24 V supply may be led via the bus line or be connected to the T-manifold
- 8 modules may be connected.

The transmission speed is **500 kBit/s**.

## INTERBUS

### INTERBUS DIAGNOSTIC CONCEPT

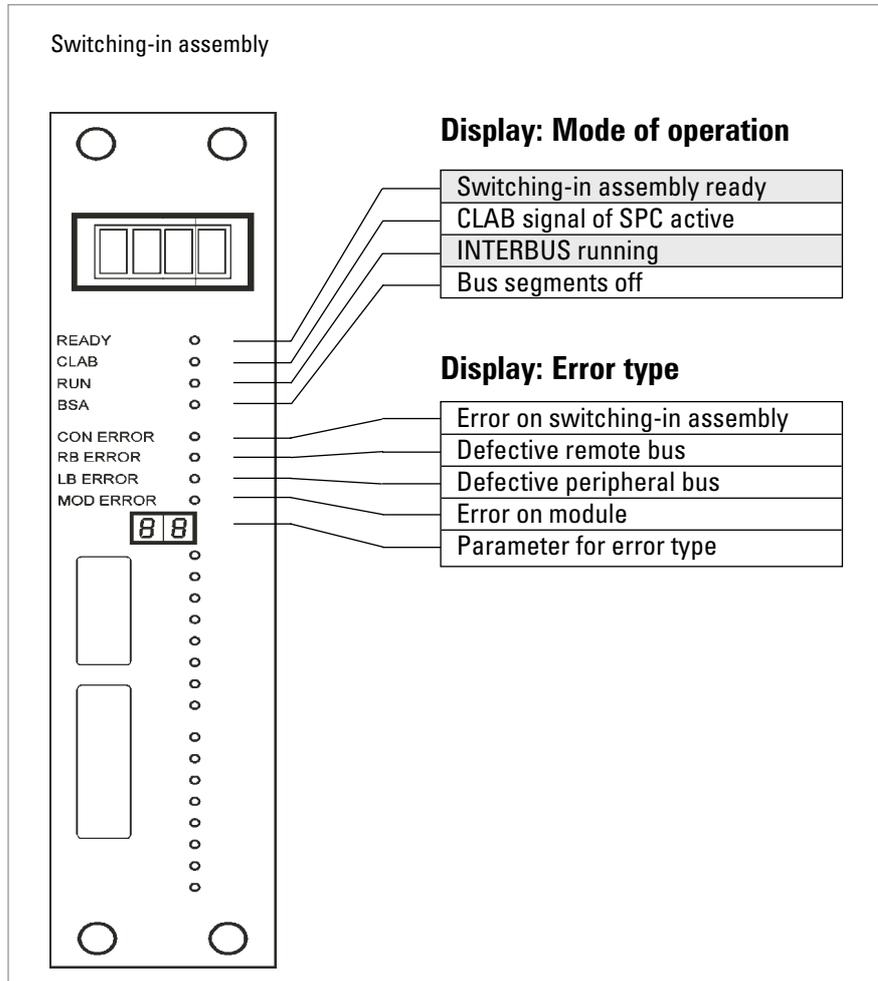

The diagnostic system is able to indicate peripheral and controller errors beside the selection of faults. Due to a row of LEDs comprising 16 bits, available on most switching-in assemblies, decentralized process states can be displayed centrally.

- Status display on control system for inputs and outputs without hand programming unit

- Self-acting fault detection and display with point and type of error without user programming

- Usual diagnosis by hand programming unit can be kept

- Diagnostic representation is always the same regardless of the control system.



For further information see:

[www.interbusclub.com/de](http://www.interbusclub.com/de)

## CANopen

### GENERAL INFORMATION

The AC 58 is an absolute shaft encoder (encoder, angle encoder). The version described in this technical manual sends its current position to another station via the "CAN-bus" transmission medium (physically: screened and twisted two-wire line).

The serial bus system CAN (Controller Area Network), which had been originally developed by Bosch/ Intel for automotive uses, is gaining ground in industrial automation technology. The system is multimaster-compatible, i.e. several CAN- stations are able to request the bus at the same time. The message with the highest priority (determined by the identifier) will be received immediately.

The data transfer is regulated by the message's priority. Within the CAN system, there are no transport addresses, but message identifiers. The message which is being sent can be received by all stations at the same time (broadcast).

By means of a special filter methods, the station only accepts the relevant messages. The identifier transmitted with the message is the basis for the decision as to whether the message will be accepted or not.

The bus coupler is standardised according to the international standard ISO-DIS 11898 (CAN High Speed) standard and allows data to be transferred at a maximum rate of 1 MBit/ s. The most significant feature of the CAN-protocol is its high level of transmission reliability (Hamming distance = 6).

The CAN-Controller Intel 82527 used in the encoder is **basic** as well as **full-CAN** compatible and supports the **CAN-specification 2.0 part B (standard protocol with 11-bit- identifier** as well as **extended protocol with 29-bit identifier)**. Up to now, only 11-bit identifiers have been used for CANopen.


### FIELD OF APPLICATION

In systems, where the position of a drive or of any other part of a machine has to be recorded and signalled to the control system, the AC 58 can assume this function. The AC 58 can resolve, for instance, positioning tasks by sending the check-back signal concerning the present drive position via the CAN bus to the positioning unit.

# Basics of Absolute Encoders ACURO

## CANopen

### CANOPEN COMMUNICATION MODEL AND PROFILE

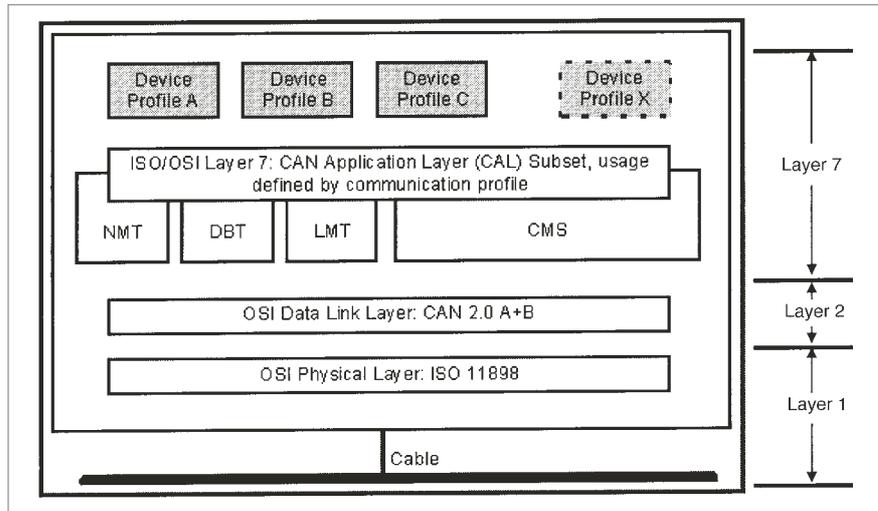

Layer 1 (Physical Layer): ISO-DIS 11898 (CAN High Speed)

Layer 2 (Data Link Layer): ISO-DIS 11898 (CAN High Speed)

Layer 7 (Application Layer): CiA DS 301 (CANopen CAL-based Communication Profile)  
+ Device profile CiA DS 4xx (CANopen Device Profile for xx)

For the following devices, profiles already exist:

- CiA Draft Standard Proposal 401 for Input/Output Modules
- CiA Draft Standard Proposal 402 for Drives and Motion Control
- CiA Work Item 403 for Human-Machine Interfaces
- CiA Work Draft 404 for Closed-Loop Controllers and Transformers
- CiA Work Item 405 for IEC-1131 Interfaces
- **CiA Draft Standard Proposal 406 for Encoders**
- CiA Work Item 407 for Public Transport
- CiA Work Item 408 for Fork-Lifts

## CANopen

### THE CANOPEN PROFILE

About two and a half years after the CiA, the association of the user and manufacturer of CAN products, had adopted the CAN Application Layer (CAL), CANopen and the respective device profiles paved the way for the development of open systems.

CANopen has been developed under the technical direction of the Steinbeis Transfer Centre for Automation (STA Reutlingen; Germany) on the basis of the layer 7 CAL specification.

Compared with CAL, CANopen only provides the functions needed for this special purpose. CANopen is thus a part of CAL which has been optimised for application purposes and allows for a simpler system structure as well as for simpler devices.

CANopen has been optimised for a quick transfer of data in real-time systems and has been standardised for different device profiles.

The CAN in Automation (CiA) association of users and manufacturers is responsible for the establishing and the standardisation of the respective profiles.

The RA58 with CANopen meets the requirements laid down in the communication profile (CiA DS 301) and in the device profile for encoders.

CANopen allows for:

- auto configuration of the network,
- comfortable access to all device parameters.
- synchronisation of the devices,
- cyclical and event-controlled process data processing,
- simultaneous data input and output.

CANopen uses four communication objects (COB) with different features:

- Process Data Objects (PDO) for real-time data
- Service Data Objects (SDO) for the transfer of parameters and programs
- Network Management (NMT, Life-Guarding)
- predefined objects (for synchronisation, time stamp, emergency message)

All device parameters are stored in an object directory. The object directory contains the description, data type and structure of the parameters as well as their addresses (index).

The directory consists of three parts: communication profile parameters, device profile parameters and manufacturer specific parameters.

### THE ENCODER DEVICE PROFILE (CIA DSP 406)

This profile describes a binding, but manufacturer-independent definition of the interface for encoders. The profile not only defines which CANopen functions are to be used, but also how they are to be used. This standard permits an open and manufacturer-independent bus system.

The device profile consists of two object categories

- the standard category C1 describes all the basic functions the shaft encoder must contain

- the extended category C2 contains a variety of additional functions which either have to be supported by category C2 shaft encoders (mandatory) or which are optional. Category C2 devices thus contain all C1 and C2 mandatory functions as well as, depending on the manufacturer, further optional functions.

Furthermore, an addressable area is defined in the profile, to which, depending on the manufacturer, different functions can be assigned.

# Basics of Absolute Encoders ACURO

## CANopen

### DATA TRANSFER

In CANopen, the data is transferred by means of two different communication types (COB = Communication Object) with different features:

- **Process Data Objects (PDO)**
- **Service Data Objects (SDO)**

The priority of the message objects is determined by the COB identifier.

The **process data objects (PDO)** serve the highly dynamic exchange of real-time data (e.g. position of the shaft encoder) with a maximum length of 8 Byte. This data is transferred with high priority (low COB identifier). PDOs are broadcast messages and put their information simultaneously at the disposal of all desired receivers.

The **service data objects (SDO)** form the communication channel for the transfer of device parameters (e.g. programming of the shaft encoders' resolution). Since these parameters are transferred acyclically (e.g. only once when running up the network), the SDO objects have a low priority (high COB identifier).

### COB IDENTIFIER

For an easier administration of the identifiers, CANopen uses the "Predefined master/Slave Connection Set"). In this case, all identifiers with standard values are defined in the object directory. However, these identifiers can be modified according to the customers' needs via SDO access.

The 11-bit identifier consists of a 4 bit function code and a 7 bit node number.

Bit-No.	10	9	8	7	6	5	4	3	2	1	0
Type	Function code				Node number						
Assignment <sup>1</sup>	x	x	x	x	0	0	x	x	x	x	x

<sup>1</sup> x = binary value can be selected freely 0 or 1); 0 = 0 value is fixed

**The higher the value of the COB identifier, the lower the identifier's priority!**

### NODE NUMBER

The 7-bit node number is set by means of the hardware via the 5 DIP switches on the encoder's back.



For further information see CAN user organisation:  
[www.can-cia.de](http://www.can-cia.de)

# Basics of Absolute Encoders ACURO

## DeviceNet

### BACKGROUND AND TECHNOLOGY

#### Background

- The basic technology was developed by Allen-Bradley
- Introduced in March 1994
- The ODVA (Open DeviceNet Vendor Association) was founded in April 1995


#### Technology

- CAN-Layer 2 (Data Link Layer) - ISO 11898 and 11519-1
- DeviceNet covers layer 7 (Application Layer) and layer 1 (Physical Layer), developed for industrial automation


#### Main benefits

- Reduced cabling and installation effort
- Reduced run-in time
- Reduced down-time
- Fast error elimination
- Devices can be removed, replaced and inserted without having to shut the network down
- Devices from various manufacturers can be exchanged
- Devices are configured over the network

### LINEAR BUS TOPOLOGY

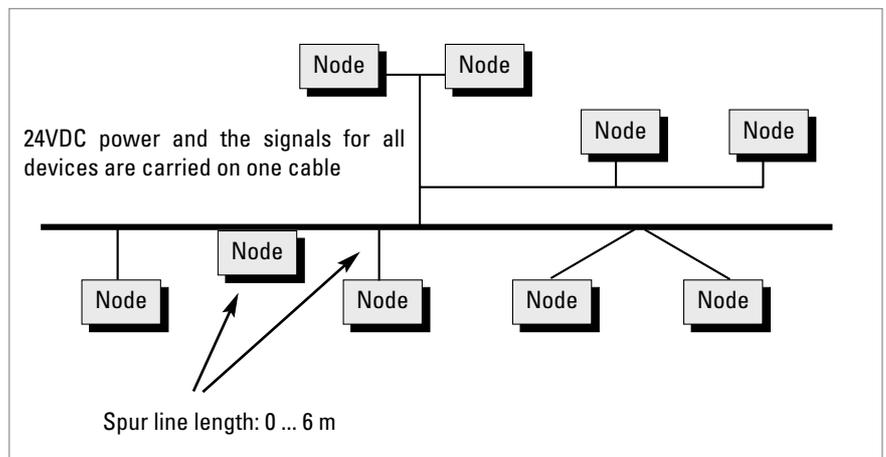

### NETWORK SPECIFICATION

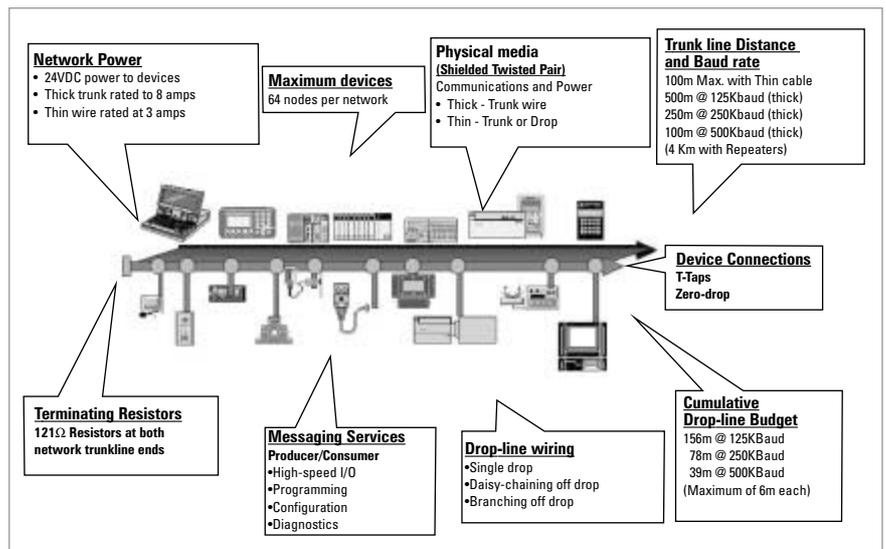

For more information about deviceNet please contact:

<http://www.odva.org>

e-mail: [odva@powerinternet.com](mailto:odva@powerinternet.com)

# Basics of Absolute Encoders ACURO

## Profibus-DP

### GENERAL INFORMATION

The basic functions of the PROFIBUS DP are here only described in extracts. For additional information, please refer to the standards on PROFIBUS DP, i.e. DIN 19245-3 and EN 50170 respectively.



### INTRODUCTION

The AC 58 is an absolute shaft encoder (encoder, angle encoder). The version described in this manual sends its current position to another station via the transmission medium "PROFIBUS DP" (physically: screened and twisted pair line). The AC 58 supports all class 1 and 2 functions listed in the encoder profile.

PROFIBUS-DP is manufacturer independent, open field bus standard for a variety of applications in the field of production, process and building services automation. The requirements of openness and independence from the manufacturer are stipulated in the European standard EN 50 170.

PROFIBUS-DP permits the communication of devices produced by different manufacturers without any particular adaptations of the interfaces.

PROFIBUS DP is a special standard version for a quick data exchange within the field level which has been optimised in terms of speed and low connection costs. Central control systems like, for example SPC/ PC communicate via a quick, serial connection with local field devices like drives, valves, or encoders. The data exchange between these devices is predominantly cyclical. The communication functions required for this exchange are determined by the basic functions of the PROFIBUS DP according to the EN 50 170 European standard.

### FIELD OF APPLICATION

In systems, where the position of a drive or of any other part of a machine has to be recorded and signalled to the control system, the AC 58 can assume this function.

The AC 58 can resolve, for instance, positioning tasks by sending the checkback signal concerning the present drive position via the PROFIBUS DP to the positioning unit.

### BASIC FUNCTIONS OF THE PROFIBUS-DP

The central control system (master) cyclically reads out the input information from the slaves and writes the output information to the slaves. For this purpose, the bus cycle time has to be shorter than the program cycle time of the central SPC, which amounts to approx. 10 ms for various applications.

Apart from the cyclical user data transfer, the PROFIBUS DP version also disposes of powerful functions for diagnosis and initial operation procedures. The data traffic is controlled by watchdog functions on both the slave and the master side. The following table summarises the basic functions of the PROFIBUS DP.

# Basics of Absolute Encoders ACURO

## Profibus-DP

Transmission technology:	<ul style="list-style-type: none"> <li>• RS-485 twisted pair line</li> <li>• Baud rates ranging from 9.6 kbit/s up to 12 Mbit/s</li> </ul>
Bus access:	<ul style="list-style-type: none"> <li>• Token passing procedure between the masters and master-slave procedures for slaves</li> <li>• Monomaster or multimaster systems possible</li> <li>• master and slave devices, max. of 126 stations at a single bus</li> </ul>
Communication:	<ul style="list-style-type: none"> <li>• Point-to-point (user data communication) or multicast (control commands)</li> <li>• cyclical master-slave user data communication and acyclical master-master data transfer</li> </ul>
Operating state:	<ul style="list-style-type: none"> <li>• Operate: cyclical transfer of input and output data</li> <li>• Clear: The input data are read, the output data remain in the safe status</li> <li>• Stop: only master-master data transfer is possible</li> </ul>
Synchronisation:	<ul style="list-style-type: none"> <li>• Control commands enable a synchronisation of the input and output data</li> <li>• Sync mode: Output data are being synchronised</li> </ul>
Functionality:	<ul style="list-style-type: none"> <li>• Cyclical user data transfer between DP master and DP slave(s)</li> <li>• Single DP slaves are dynamically activated or deactivated</li> <li>• Control of the DP slave's configuration. Powerful diagnostic functions, 3 stepped diagnostic message levels.</li> <li>• Synchronisation of in- and/ or output</li> <li>• Address assignment for the DP slaves via the bus</li> <li>• Configuration of the DP masters (DPM1) via the bus</li> <li>• Maximum of 246 byte input and output data per DP slave possible</li> </ul>
Protection functions:	<ul style="list-style-type: none"> <li>• All messages are transferred with a hamming distance of HD=4</li> <li>• Response control at the DP slaves</li> <li>• Access protection of the DP slaves' input/ output</li> <li>• Monitoring of the user data communication with adjustable control timer at the master</li> </ul>
Device types:	<ul style="list-style-type: none"> <li>• DP master class 2 (DPM2), e.g. programming/ project planning devices</li> <li>• DP master class 1 (DPM1), e.g. central automation devices like SPC, PC</li> <li>• DP slave e. g. devices with binary or analogue input/ output, drives, valves</li> </ul>

### ESSENTIAL FEATURES/ SPEED

The PROFIBUS DP only requires approx. 1 ms at a speed of 12 Mbit/s in order to transfer 512 bit input and 512 bit output data by means of 32 stations.

The following diagram shows the usual PROFIBUS DP transfer time interval in relation to the number of stations as well as the transmission speed. The high speed can be above all explained by the fact that the input and output data within a message cycle are transferred by using the layer 2 SRD service (Send and Receive Data Service).

### Diagnostic function:

The comprehensive diagnostic functions of PROFIBUS DP allow a quick localisation of the errors. The diagnostic messages are transferred by means of the bus and are assembled at the master. They are subdivided in three levels:

# Basics of Absolute Encoders ACURO

## Profibus-DP

### BASIC FEATURES/SPEED

#### Station-related diagnosis


Messages on the general readiness for service of a station, like for example, overtemperature or undervoltage.

#### Channel related diagnosis

The error cause in relation to a single input/output bit (channel) is indicated here, like for example, a short-circuit at output line 7.

#### Module-related diagnosis

These messages indicate that a diagnosis within a certain I/O part (e.g. 8 bit output module) of a station is in hand.

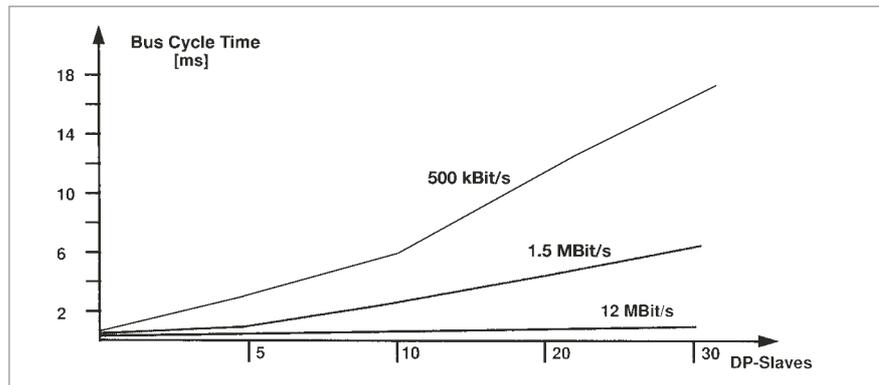

Bus cycle time of a PROFIBUS DP monomaster system

Boundary conditions: Each slave has 2 byte input and 2 byte output data; the minimum slave interval time amounts to 200 microseconds; TSDI = 37 bit times, TSDR = 11 bit times

### CONFIGURATION OF THE SYSTEM AND DEVICE TYPES

By means of PROFIBUS DP, mono- and multimaster systems can be realised. For this reason, a high level of flexibility in terms of the system configuration can be achieved. A maximum of 126 devices (master or slaves) may be connected to a bus. The definitions for the system configuration contain the number of stations, the assignment of the station address to the I/O addresses, the data consistency of the I/O data, the format of the diagnostic messages and the bus parameters used. Each PROFIBUS DP system consists of different device types. There are three device types to be distinguished:

#### DP master class 1 (DPM1)

These devices are central control systems exchanging information with the local stations (DP slaves) during a fixed message cycle. Typical devices of this kind are stored-program controllers (SPC), PC or VME systems.

#### DP master class 2 (DPM2)

Programming, configuration devices, and operator panels belong to this category. They are used for the initial operation procedures in order to establish the configuration of the DP system, or to operate the plants in the course of operation.


#### DP slave

A DP slave is a peripheral I/O rack (I/O, drives, HMI, valves) that reads the input information and sends output information to the peripheral equipment. Devices which provide only input or only output information might also be used.

The amount of input and output information is device specific and must not exceed 246 byte for the input and 246 byte for the output data.

# Basics of Absolute Encoders ACURO

## Profibus-DP

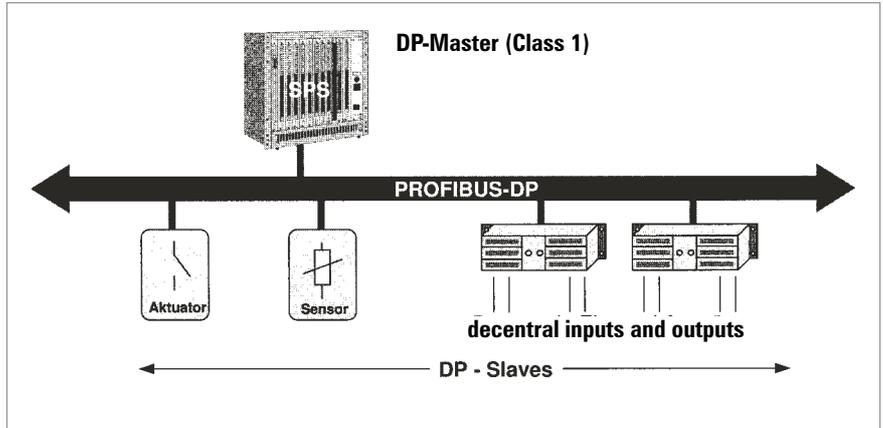


### PROFIBUS DP monomaster system

In the case of monomaster bus systems, there is only one master active at bus during the on-line phase of the bus system. The above diagram shows the system configuration of a monomaster system.

The SPC based control system is the central control element. By means of the transmission medium, the DP slaves are locally linked to the SPC control system. By using this system configuration, the shortest bus cycle time can be obtained.

In the multimaster mode, several masters are linked to a single bus. They either form independent subsystems consisting of one DPM1 and its corresponding DP slaves each, or additional configuration and diagnostic devices (see diagram below). The I/O maps of the DP slaves can be read by all DP masters, but only one DP master, the one which has been assigned DPM1 during project planning, is able to write the output information. Multimaster systems attain a medium bus cycle time.

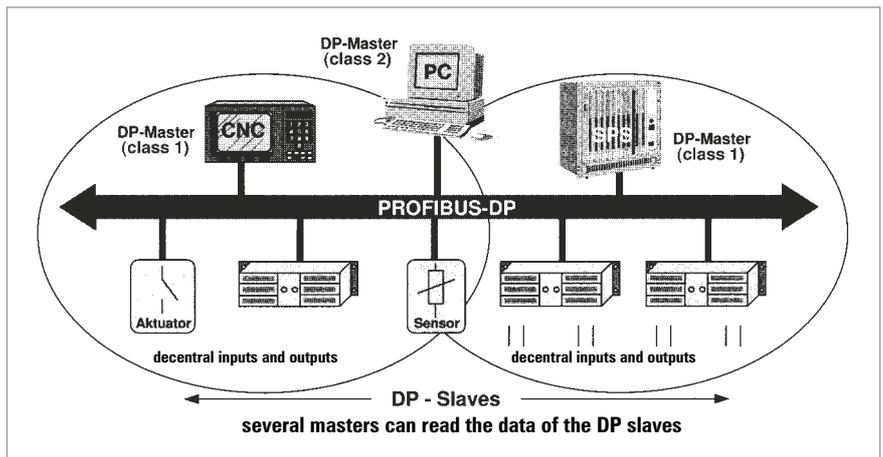

PROFIBUS-DP Multi-Master System

## Profibus-DP

### SYSTEM PERFORMANCE

In order to obtain a high level of exchangeability between the devices, the system performance of PROFIBUS DP has also been standardised. It is mainly determined by the operational status of the DPM1.

**The DPM1** can either be controlled locally or via the bus by the project planning device. The following three main states can be distinguished:

#### Stop

There is no data traffic between DPM1 and the DP slaves.

#### Clear

The DPM1 reads the input information of the DP slaves and maintains the safe status of the DP slaves' output.

#### Operate

The DPM1 has entered the data transfer phase. In case of a cyclical data traffic, the input is read by the DP slaves while the output is transferred to the DP slaves.

After an error has occurred during the data transfer phase of the DPM1, like for example, the failure of a DP slave, the response of the system is determined by the operating parameter "Auto Clear".

If this parameter has been set to true, the DPM1 will set the output of all the respective DP slaves to the safe status, as soon as a DP slave is no longer available for user data communication. Afterwards, the DPM1 changes to the clear status.

If this parameter is = false, the DPM1 remains, even if an error occurs, in the operate status, and the user can determine the response of the system at his own discretion.

### CYCLICAL DATA TRANSFER BETWEEN DPM1 AND THE DP SLAVES


The data traffic between the DPM1 and the respective DP slaves is automatically handled by the DPM1 in a fixed, recurring order. When configuring the bus system, the user assigns a DP slave to the DPM1. In addition, the slaves to be included in- or excluded from the user data communication are defined.

The data traffic between the DPM1 and the DP slaves is subdivided in parametrisation, configuration, and data transfer phases. Before including a DP slave in the data transfer phase, the DPM1 checks during the parametrisation and configuration phase, whether the planned set configuration corresponds to the actual configuration of the device.

For this check, the device type, the information on the format and the length as well as the number of input and output lines have to be correct. The user thus obtains a reliable protection against parametrisation errors. In addition to the user communication, which is automatically executed by the DPM1, the user may request the new parametrisation data to be sent to the DP slaves.

# Basics of Absolute Encoders ACURO

## Profibus-DP

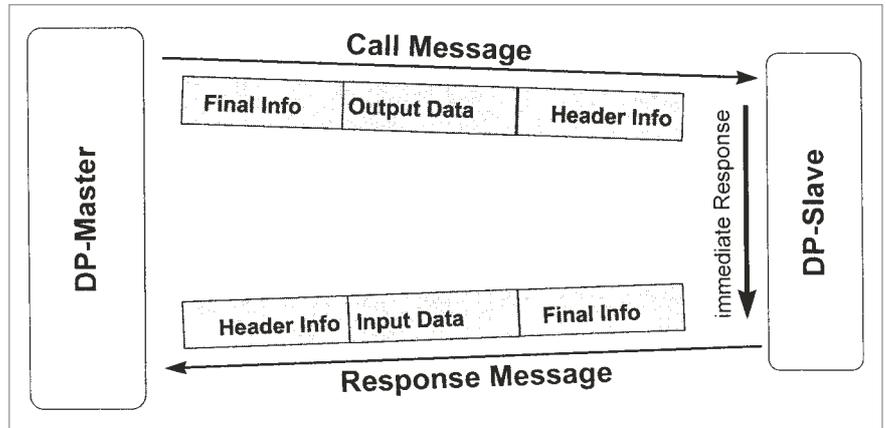

User data communication for PROFIBUS-DP

### DATA TRAFFIC BETWEEN DPM1 AND PROJECT PLANNING DEVICES

In addition to the functions between DP master and DP slaves, master-master communication functions are available, see table. They support the project planning and diagnostic devices in projecting the system via the bus.

Besides the upload and download functions, the master-master functions offer the opportunity to switch the user data transfer between the DPM1 and the single DP slaves dynamically on or off as well as to modify the operating status of the DPM1.

Function	Meaning	DPM1	DPM2
<b>Get_master_Diag</b>	reads the diagnostic data of the DPM1 or the collective diagnosis of the DP slaves.	M	0
<b>Download / Upload Group (Start_Seq, Down-/Upload, End_Seq)</b>	reads or writes the entire configuration data of a DPM1 and of the respective DP slaves.	0	0
<b>Act_Para_Brct</b>	activates the bus parameters for all operating DPM1 devices.	0	0
<b>Act_Param</b>	activates parameters or modifies the operating status of the operating DPM1 device.	0	0

M: mandatory, 0: optional

Functional overview for the master-master functions for PROFIBUS DP

## Profibus-DP

### SYNC MODE

In addition to the station-related user data communication being automatically handled by the DPM1, the masters may send control commands to a single slave, a group of slaves or all slaves at the same time. These control commands are transferred as multicast. It is only by means of this multicast that the sync and freeze operating modes for the event-controlled synchronisation of the DP slaves have been enabled.

The sync mode is started by the slaves, as soon as they receive a sync command from the respective master. The output lines of the addressed slaves will then be frozen in their current state. The output data will be stored at the slaves during the following user data transfers; the state of the output lines, however, will remain unchanged. Unless the next sync command has been received, the stored output data will not be connected to the output lines. By selecting unsync, the sync mode is terminated.

### PROTECTIVE MECHANISMS

For reasons of safety, it is necessary to equip PROFIBUS DP with powerful protective functions against false parametrisation or failure of the transmission equipment. For this purpose, control mechanisms at the DP master and the DP slave have been realised, taking the form of time-out circuits. The monitoring interval is determined during project planning.

#### At the DP master

The DPM1 controls the data traffic of the slaves by means of the Data\_Control\_Timer. For each slave, a special timer is used. The time-out circuit will respond, if no proper user data transfer occurs during a control interval. In this case, the user will be informed. If the automatic response to an error (Auto\_Clear = True) has been released, the DPM1 will quit the operate status, switch the output lines of the respective slaves to the safe status and change to the clear status.

#### At the DP slave

In order to recognise errors by the master or transmission errors, the slave executes the response control. If there is no data traffic during the response control interval, the slave will automatically switch the output lines to the safe status.

When operating in multimaster systems, a supplementary access protection for the I/O lines of the slaves will be necessary. This is to make sure that direct access can only be gained by an authorised master. For all the other masters, the slaves will provide an I/O map which can be also be read without access authorisation.

### COMMUNICATION INTERFACE

The communication interface corresponds to the PROFIBUS DP class 2 encoder profile.

Within this interface the class 1 functions are included.



For further information see:  
[www.profibus.de](http://www.profibus.de)

## Glossary of Technical Terms

Absolute shaft encoder	Shaft encoder that transmits unique coded data for each increment.
Accuracy	The difference between the actual and measured position.
Alarm signal	Serves to monitor the shaft encoder for malfunctions, such as glass breakage, fouling, short circuit, short circuit of signal line, and supply voltage too low.
Amplitude regulation	Current or voltage amplitude is constant through regulation
Analogue signal	A signal whose level alters continuously.
ASIC	Application specific integrated circuit
Axial loading	Maximum load on the shaft encoder's shaft in the axial direction
Bandwidth	Frequency range for output signals
Baud rate	Rate of data transfer (bits per second).
BCD	Binary-coded decimal; binary representation of a decimal number.
Binary	Two logical states (yes/no); the basis of binary data-processing systems.
Binary code	Code using binary numbering; often used for absolute measuring systems.
Bit	Abbreviation for "binary digit"; the smallest unit of information of a binary system, whose value can be 1 or 0 (yes-or-no decision).
Bus cycle	Time needed for polling every bus slave by the bus master.
Byte	Sequence of 8 bits.
CAL	Can application layer
CANopen	Layer 7 protocol based on CAN
CCW	Counter clockwise
Change of state	For CAN: Bus node (encoder) sends it's data automatically when a position change occurs.
Channel	Signal track on which 1 or 0 is outputted.
CiA	CAN in automation (CAN users and manufacturers group)
CiA DS	CAN in automation draft standard, communication profile
CiA DSP	CAN in automation draft standard proposal, communication profile
CIM	Computer Integrated Manufacturing; i. e. the linking of different computer-aided processes in production and related fields for general use of the data.
CMD	Software tool for configuration and diagnosis of Interbus networks
COB	Communication object
Code	Format in which data are transmitted.
Code switching frequency	Number of position steps per second. For absolute shaft encoders with parallel interface: The maximum output frequency of the LSB output driver ( $f_{max}$ ) also limits the maximum permissible code switching frequency: Code switching frequency max. = $2 \cdot f_{max}$ for Binary code Code switching frequency max. = $4 \cdot f_{max}$ for Gray code

## Glossary of Technical Terms

Coefficient of thermal expansion	Material expansion under influence of temperature change [ $\mu\text{m}/^\circ\text{K m}$ ], relevant for linear scales.
Complementary	Output circuit for which also the inverted signals are outputted (e.g. Channel A and Channel A). Electrically, the 1/0 levels are transmitted as voltage differences between two lines. In this way the information signal (the difference) remains pure as in general interferences are interspersed equally on both lines.
CRC	Cyclic redundancy check. Bit error protection method for data communication.
CW	Clockwise
Data bus	System of lines over which data are transferred electronically in parallel or serially.
Data consistency	Intrinsic coherence of data in respect of timing and logical aspects.
Data integrity	Correspondence of data with the reality that they describe.
Datavalid	Output for checking the validity of data.
DC	Direct current (not alternating)
Demodulator	Device that filters the original information out of an altered signal again.
DeviceNet - conformity and interoperability	Confirmation of agreement of a bus node with the DeviceNet specifications and correct interoperability with other DeviceNet nodes.
Differential line driver	Output circuit in which the difference between the two signals A and A is evaluated, thus providing high signal transmission reliability.
DIN	Deutsche Industrie Norm (German Industrial Standard)
Direction	Control input for determining the data sequence (whether ascending for clockwise or counterclockwise rotation).
Dual Code	Natural binary code
EDS - File	Electronic data sheet. This is a file with the device specific parameter description and is provided by the manufacturer of a DeviceNet or CANopen device.
EEPROM	"Electrically Erasable Programmable Read-Only Memory" chip (see EPROM).
EIA	Electronic Industries Association; U.S. umbrella organization of manufacturers of electronic equipment and facilities. It is responsible for maintenance and development of the industrial standards for interfaces between data-processing devices and data communications equipment.
EMC	Electromagnetic compatibility
ENCOM	User group of manufacturers of INTERBUS-S absolute shaft encoders
Encoder monitoring	See "Alarm signal"
Enable	Control input via which the data outputs can be activated.
Encoder power	Supply voltage to be provided for the shaft encoder.
EPROM	"Erasable Programmable Read-Only Memory" chip, which can be erased with ultraviolet light, after which new data can be written into it.
Gray code	A special binary code that changes only one data bit per measuring step at a time. It is used with absolute encoders.

## Glossary of Technical Terms

Hamming distance	Measure for data security in a data transmission. The higher the number the better the ability to detect data errors.																												
Harmonic Distortion	Measure for the signal quality of sinewave encoder [%]. It describes the content of harmonics in analogue signals. The lower the number the better the signal.																												
Hysteresis error	Measurement deviation for a position approached from opposite directions.																												
Identifier	Address of a message in a CAN network.																												
IEC	International Electrotechnical Commission; organization promoting international standardization of electrical components.																												
Immunity to interference	<p>Test procedure according to IEC 801, Part 4</p> <p>– A test of susceptibility to fast electrical transients (bursts) causing interference on lines.</p> <p>The test values are divided into 5 levels:</p> <table border="1"> <thead> <tr> <th>Level</th> <th>Mains line</th> <th>Data and control lines</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>0.5 kV</td> <td>0.25 kV</td> </tr> <tr> <td>2</td> <td>1.0 kV</td> <td>0.5 kV</td> </tr> <tr> <td>3</td> <td>2.0 kV</td> <td>1.0 kV</td> </tr> <tr> <td>4</td> <td>4.0 kV</td> <td>2.0 kV</td> </tr> <tr> <td>X</td> <td>special</td> <td>special</td> </tr> </tbody> </table> <p>– Test procedure according to IEC 801, Part 2</p> <p>Discharge of static electricity on the surface and in the surroundings of the specimen. The test values are divided into 4 classes:</p> <table border="1"> <thead> <tr> <th>Class</th> <th>test voltage</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2 kV</td> </tr> <tr> <td>2</td> <td>4 kV</td> </tr> <tr> <td>3</td> <td>8 kV</td> </tr> <tr> <td>4</td> <td>15 kV</td> </tr> </tbody> </table> <p>– Radio interference voltage test to VDE 0871.</p>	Level	Mains line	Data and control lines	1	0.5 kV	0.25 kV	2	1.0 kV	0.5 kV	3	2.0 kV	1.0 kV	4	4.0 kV	2.0 kV	X	special	special	Class	test voltage	1	2 kV	2	4 kV	3	8 kV	4	15 kV
Level	Mains line	Data and control lines																											
1	0.5 kV	0.25 kV																											
2	1.0 kV	0.5 kV																											
3	2.0 kV	1.0 kV																											
4	4.0 kV	2.0 kV																											
X	special	special																											
Class	test voltage																												
1	2 kV																												
2	4 kV																												
3	8 kV																												
4	15 kV																												
Incremental measuring system	Measuring method in which the variable is formed by counting increments (measuring steps).																												
Incremental shaft encoder	Shaft encoder which transmits an electrical signal (yes/no) for each increment, determined by the marked disc.																												
Integer	Integral values; range of values at n bit: 0 ... (2 <sup>n</sup> -1)																												
Integrated coupling	Flexible coupling built into shaft encoders																												
INTERBUS	Real time bus for the sensor-actor-level																												
Interbus-Loop	Two wire version of Interbus, transmitting data over the power supply lines and using Phoenix Contact "Quickon" cable plugs.																												
Interface	Transfer point with certain terminals, signals, or signal sequences. The interface serves for communication of the shaft encoder with other systems.																												
Interpolation	Scanning of a sinewave signal to increase resolution by generating intermediate position values.																												
IP	See "Protection class"																												
Jitter	Change in the phase angle between Channel A and B within one revolution (360°).																												
Latch	Control input for storing ("freezing") the data before they are read out.																												

## Glossary of Technical Terms

Linearity	Deviation of the reading from the actual value within one revolution (360°).																
Line driver	Output circuit that makes a larger current possible.																
LSB	Least Significant Bit																
Measuring wheel	A wheel that, mounted on a shaft encoder, converts a linear motion into a rotary motion.																
MSB	Most Significant Bit																
MTBF	“Mean Time Between Failures”, a measure of average service life.																
Multi-turn shaft encoder	Shaft encoder which transmits the number of shaft revolutions as well as the angular position of the shaft.																
NC machinery	Numerically Controlled machinery; their movements are programmed.																
NPN input/output	Transistor input/output circuit implemented with an npn transistor, and thus negative switching.																
Offset	For programmable absolute shaft encoders: the offset value is added to the value of physical position. As a result you get a relative shift of the output value (output value = position value + offset value).																
Parallel interface	Transfer point at which the data are transferred in parallel over several lines.																
Parity	Checkbit for error detection in data transfer																
PDO	Process data object (in CAN networks)																
P.L.C.	Programmable Logic Controller: control system whose program is stored in a program memory and can be changed.																
Phase discriminator	Sense-of-direction detector that functions by evaluating the phase angle between Signal A and Signal B.																
Phase tolerance	Deviation of the pulse-edge from Channel A to B, relative to the phase angle 90°.																
PNP input/output	Transistor input/output circuit implemented with a pnp transistor, and thus positive switching.																
Preset	For programmable absolute shaft encoders: The programmed numerical value is accepted as output value (output value = preset value).																
Protection class	The enclosure class is designated according to DIN 40050, by IP and a two-figure code number. <table> <tr> <td>1st digit</td> <td>Degree of protection against ingress of solid bodies:</td> </tr> <tr> <td>0</td> <td>no special protection</td> </tr> <tr> <td>1</td> <td>solid bodies with dia. &gt; 50 mm, no protection against intentional penetration</td> </tr> <tr> <td>2</td> <td>solid bodies with dia. &gt; 12 mm, warding off fingers etc.</td> </tr> <tr> <td>3</td> <td>solid bodies with dia. &gt; 2.5 mm, warding off tools, wires, etc. (thickness &gt; 2.5 mm)</td> </tr> <tr> <td>4</td> <td>solid bodies with dia. &gt; 1 mm, warding off tools, wires, etc. (thickness &gt; 1 mm)</td> </tr> <tr> <td>5</td> <td>dust in harmful quantities, complete shock-hazard protection</td> </tr> <tr> <td>6</td> <td>dust (dust-tight), complete shock-hazard protection</td> </tr> </table>	1st digit	Degree of protection against ingress of solid bodies:	0	no special protection	1	solid bodies with dia. > 50 mm, no protection against intentional penetration	2	solid bodies with dia. > 12 mm, warding off fingers etc.	3	solid bodies with dia. > 2.5 mm, warding off tools, wires, etc. (thickness > 2.5 mm)	4	solid bodies with dia. > 1 mm, warding off tools, wires, etc. (thickness > 1 mm)	5	dust in harmful quantities, complete shock-hazard protection	6	dust (dust-tight), complete shock-hazard protection
1st digit	Degree of protection against ingress of solid bodies:																
0	no special protection																
1	solid bodies with dia. > 50 mm, no protection against intentional penetration																
2	solid bodies with dia. > 12 mm, warding off fingers etc.																
3	solid bodies with dia. > 2.5 mm, warding off tools, wires, etc. (thickness > 2.5 mm)																
4	solid bodies with dia. > 1 mm, warding off tools, wires, etc. (thickness > 1 mm)																
5	dust in harmful quantities, complete shock-hazard protection																
6	dust (dust-tight), complete shock-hazard protection																

## Glossary of Technical Terms

Protection class (continued)	<p>2nd digit Degree of protection against water</p> <p>0 no special protection</p> <p>1 water dripping vertically</p> <p>2 water dripping at angles up to 15° from vertical</p> <p>3 water dripping at angles up to 60° from vertical (spraying water)</p> <p>4 water from all directions (splashing water)</p> <p>5 water from a nozzle from all directions (hose-water)</p> <p>6 heavy seas or strong jet of water (flooding)</p> <p>7 water, if the device is immersed in water under specified conditions of pressure and time (immersion)</p> <p>8 water, if the device is submerged constantly. The manufacturer must describe the conditions (submersion)</p> <p>(For numbers 1 to 8, water must not penetrate in harmful quantities.)</p> <p>Example: IP 65 A device thus designated is dust-tight, and protected against hose-water.</p>
PVC	Polyvinylchloride; plastic coating of device cable
PTB approval	Approval for use by the Physikalisch-Technische Bundesanstalt, the German government materials testing institute.
Pulse (repetition) frequency, max.	The maximum signal frequency achievable by the shaft encoder, the product of rotary speed and number of markings.
Radial load, max.	Maximum loading of shaft encoder shaft in radial direction.
Quickon	Connector with self contacting cable cutting contacts from Phoenix Contact used with Interbus Loop
RAM	“Random Access Memory” chip; this memory can be read from, written to, and erased freely. When the power goes off, it loses its information.
Reference mark	Irregular gradation pattern that generates a single signal peak, to provide an absolute reference for an incremental shaft encoder.
Reference pulse	Square-wave signal generated by a reference mark, usually only one increment wide, to provide an absolute reference for an incremental shaft encoder.
Repeatability	Degree of deviation for a point approached repeatedly under identical operating conditions.
Resolution	Number of increments per revolution (rotary) or distance between two increments (linear)
Resolver	Inductive angular measuring device that generates two alternating voltages, with amplitude a function of the angle.
Reversal error	Deviation in reading of a position when approached from different directions (hysteresis).
ROM	“Read-Only-Memory” chip, whose memory can only be read out.
RS 422	Standardized interface for unidirectional point-to-point connections (for description refer to “Complementary”); voltage difference 7 V DC max.
RS 422/485	Interfaces for serial data transfer with specifications to EIA standards.
RS 485	Like RS 422, however as a bidirectional bus interface
Sampling frequency	Number of signal periods per second. The maximum sampling frequency limits the speed of incremental measuring systems.
SDO	Service data object (in CAN networks)

## Glossary of Technical Terms

Sense	The Sense lines (Sense VCC and Sense GND) enable measurement of the factual encoder voltage without adulteration by voltage drop due to supply current and cable resistivity. With that e.g. supply voltage can automatically be adjusted.
Scaling	For programmable absolute shaft encoders the encoder actual value is multiplied by a scaling factor. Thus the resolution (increments per measuring distance or increments per revolution) is adaptable to the respective application.
SSI	Synchronous-serial Interface; standardized interface for serial data transfer
TPE	Thermo-plastic polyester elastomer; plastic coating of device cable
Tristate	Control input; switches the outputs either to active or to high impedance.
Two's complement	Number format for the representation of negative numbers; range of values at n bit: $-(2^n - 1) \dots 0 \dots (2^{n-1} - 1)$

## HENGSTLER INTERNATIONAL

---

### ■ GERMANY

Hengstler GmbH  
Uhlandstr. 49  
78554 Aldingen  
Tel. +49-74 24-8 90  
Fax +49-74 24-8 94 70/ 89 500  
<http://www.hengstler.com>  
[info@hengstler.de](mailto:info@hengstler.de)

---

### ■ FRANCE

Hengstler Contrôle Numérique  
S.A.R.L.  
Z.I. des Mardelles  
94-106, Rue Blaise Pascal, B.P. 71  
93602 Aulnay-sous-Bois, Cédex  
Tel. (01) 48795501  
Fax (01) 48795561  
<http://www.hengstler.fr>

---

### ■ GREAT BRITAIN

West Instruments  
The Hyde  
Brighton, East Sussex  
BN2 4JU, England  
Tel. +44 (0) 1273 606271  
Fax +44 (0) 1273 609990  
[info@west-inst.co.uk](mailto:info@west-inst.co.uk)  
<http://www.westinstruments.com>

---

### ■ ITALY

ICG Holding S.r.l.  
Via Leonardo da Vinci, 45/47  
20020 Lainate (MI)  
Tel. 0039-02 9330011  
Fax 0039-02 93300129  
[info@icg-holding.com](mailto:info@icg-holding.com)

---

### ■ SLOVAKIA

Hengstler sro  
Pradiaren 40  
060 01 Kezmarok  
Tel :+421 52 46803 19,  
Fax:+421 52 46803 99  
[milan.balla@hengstler.com](mailto:milan.balla@hengstler.com)

---

### ■ BRASIL

Veeder Root do Brasil  
Com. e. Ind. Ltda.  
Rua Ado Benatti, 92  
Sao Paulo SP  
CEP 05037-904  
Tel 0055 11 361 121 55  
Fax 0055 11 36 11 982  
[Antonio\\_Araujo@veeder.com](mailto:Antonio_Araujo@veeder.com)

---

### ■ CHINA

Danaher ICG China  
Shanghai Office  
Room.904,Tower 1,  
Kerry Everbright City  
No.218,Tian Mu Road(W)  
Shanghai 200070, China  
Tel:+86 21 63539541, 33030472  
Fax:+86 21 33030345  
[william.liu@danahericg.com.cn](mailto:william.liu@danahericg.com.cn)

---

### ■ CHINA

Danaher ICG - China  
Beijing Office  
Room 2202, Scitech Tower  
22 Jianguomen Wai Street  
Beijing 100004 PR China  
Tel: 86-10-6512-0195  
Fax: 86-10-6522-0887  
[frank.li@danahericg.com.cn](mailto:frank.li@danahericg.com.cn)

---

### ■ CHINA

Danaher ICG - China  
Guangzhou Office  
Room B2, 15th Floor,  
Gao Sheng Building  
No.109 Ti Yu Xi Road  
Guangzhou 510620, China  
Tel: +86 20-22646072  
Fax: +86 20-22646069  
[tourist.luo@danahericg.com.cn](mailto:tourist.luo@danahericg.com.cn)

---

### ■ AGENTS

Argentina, Australia, Austria, Belgium, Brazil, Chile, China, Czech Republic, Denmark, Finland, France, Germany, Guatemala, Great Britain, Greece, Hong Kong, Hungary, India, Indonesia, Israel, Italia, Japan, Korea, Lebanon, Luxemburg, Malaysia, Mexico, Netherlands, New Zealand, Norway, Peru, Philippines, Poland, Portugal, Singapore, Slovenia, South Africa, Spain, Sweden, Switzerland, Taiwan, Thailand, Turkey, United Arab Emirates, USA, Venezuela, Vietnam

---

### ■ JAPAN

Danaher ICG Japan Co. Ltd.  
2-12-23, Minamikaneden  
Suita-shi  
Osaka 564-0044  
Tel. (06) 63868001  
Fax (06) 63865022  
[csc@danaher.co.jp](mailto:csc@danaher.co.jp)  
<http://www.hengstler.co.jp/>

---

### ■ SINGAPORE

Danaher Industrial Control  
Group - Singapore  
246 MacPherson Road  
#08-01 Betime Building  
Singapore 348578  
Tel. 65-6-7459265,  
Fax 65-6-7461791  
Pager: 94158924  
[fredtay@singnet.com.sg](mailto:fredtay@singnet.com.sg)

---

### ■ USA

Danaher Controls  
1675 Delaney Road  
Gurnee, IL 60031-1282  
Tel. (847) 662.2666  
Fax (847) 662.6633  
[dancon@dancon.com](mailto:dancon@dancon.com)  
<http://www.dancon.com>

---

### ■ USA

HECON  
2100 West Broad Street  
P.O. Box 368  
Elizabethtown, NC 28337  
Tel. 910.879.5493  
Fax 910.862.5408  
[info.hecon@hecon.com](mailto:info.hecon@hecon.com)  
<http://www.hecon.com>  
- nur für Drucker + Abscheider  
- only for Printers + Cutters

---

## HENGSTLER

Hengstler GmbH  
Uhlandstr. 49  
78554 Aldingen  
Tel. +49-74 24-8 90  
Fax +49-74 24-8 94 70/ 89 500  
<http://www.hengstler.com>  
[info@hengstler.de](mailto:info@hengstler.de)



DQS certified according DIN EN ISO 9001  
Reg. No. 1540-01



**www.hengstler.de**  
**0800-HENGSTLER**  
**436478537**

DOC 1209.17 E

Encoders programme · 04/2005 / 2000 · HohlDruck  
printed in Germany on environmentally friendly paper  
from chlorine- and acid-free production