



Selection diagram

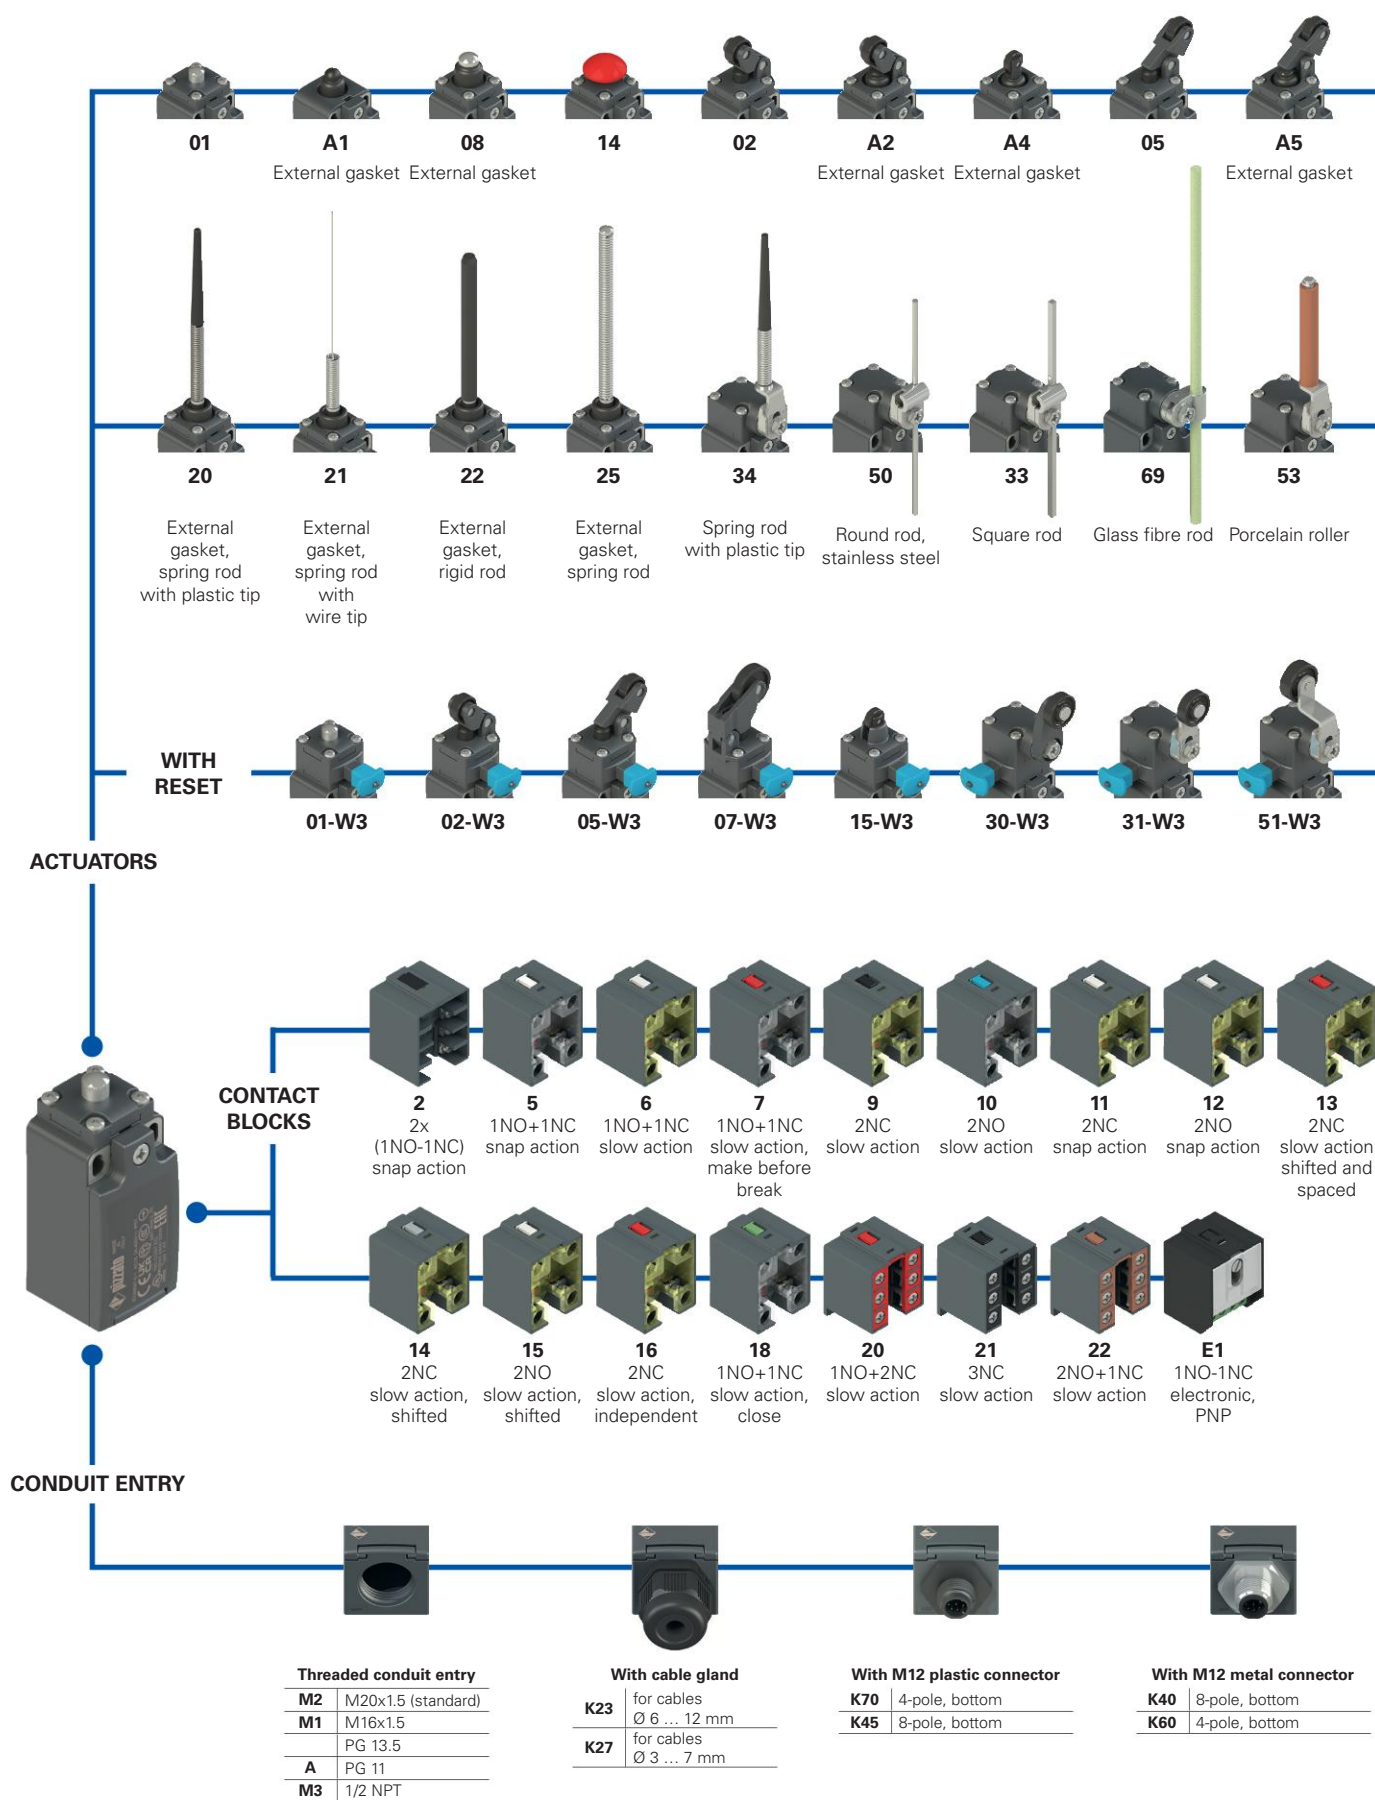

Product options

Sold separately as accessory

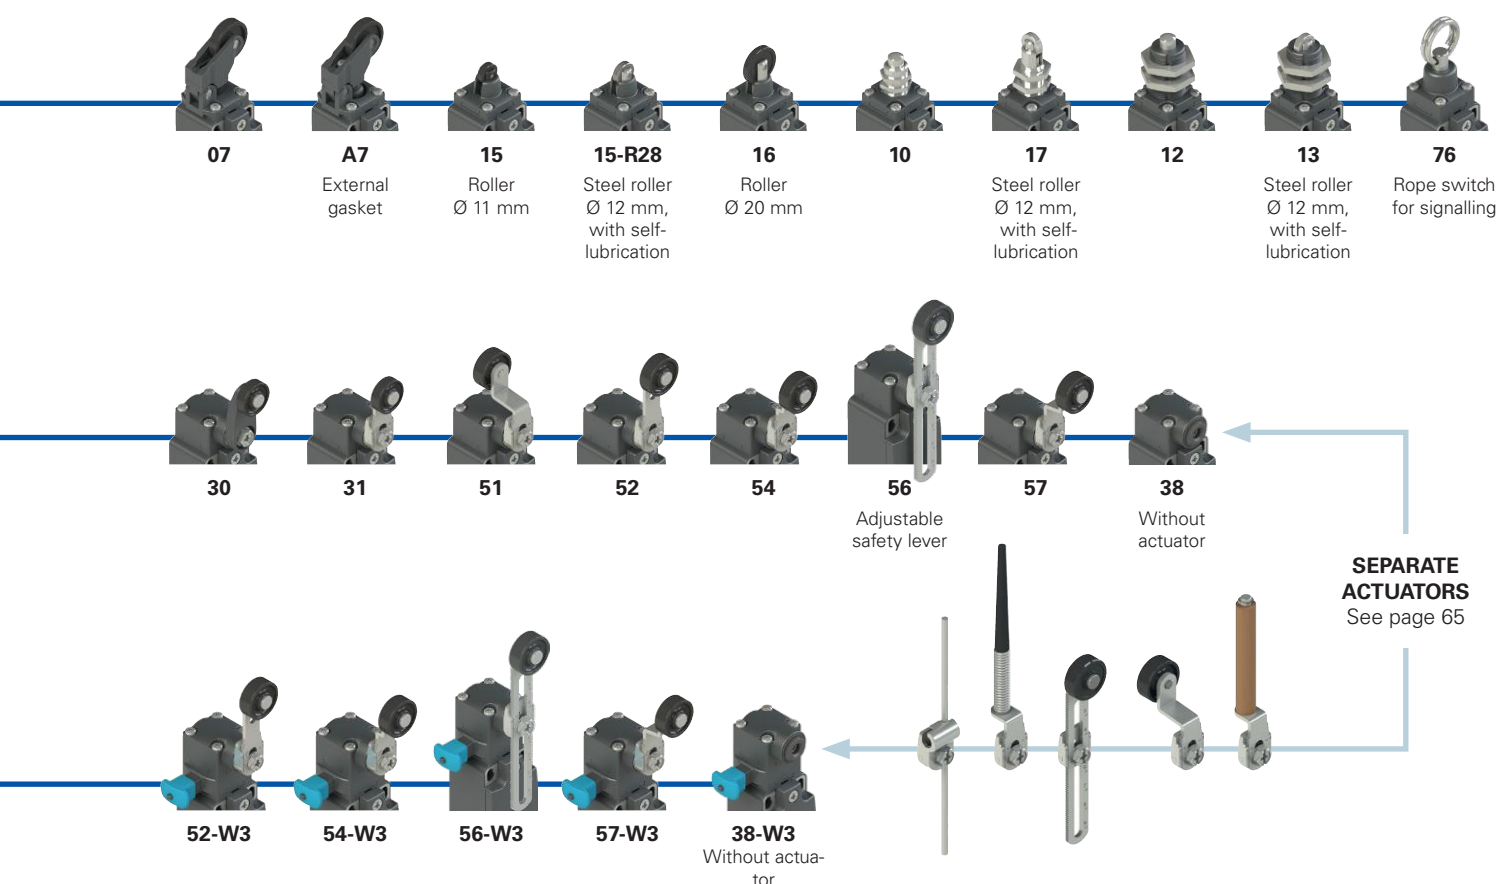

Code structure

Attention! The feasibility of a code number does not mean the effective availability of a product. Please contact our sales office.

article options options
FR 502-W3XGM2K70R23T6

Ambient temperature

-25°C ... +80°C (standard)

T6 -40°C ... +80°C

Housing

FR technopolymer, one conduit entry

Contact block

5 1NO+1NC, snap action
6 1NO+1NC, slow action
7 1NO+1NC, slow action, make before break
... ..

Actuators

01 short plunger
02 roller lever
05 angled lever with roller
... ..

Reset

without reset (standard)
W3 simultaneous reset
W4 simultaneous reset, increased force

External metallic parts

zinc-plated steel (standard)
X stainless steel

Pre-installed cable glands or connectors

no cable gland or connector (standard)
K23 cable gland for cables Ø 6 ... 12 mm
K70 M12 plastic connector, 4-pole

For the complete list of possible combinations please contact our technical department.

Threaded conduit entry

M2 M20x1.5 (standard)
M1 M16x1.5
PG 13.5
A PG 11
M3 1/2 NPT

Contact type

silver contacts (standard)
G silver contacts, 1 µm gold coating
silver contacts, 2.5 µm gold coating (not for contact block 2, 20, 21, 22)
G1

Rollers

standard roller
R28 steel, with self-lubrication, Ø 12 mm (for actuators A4, 15)
R44 316L stainless steel, Ø 12 mm (for actuators A4, 13, 15, 17)
R23 steel, with self-lubrication, Ø 14 mm (for actuators A2, 02, A5, 05, 30, 31, 51, 52, 54, 55, 56, 57)
R43 316L stainless steel, Ø 14 mm (for actuators A2, 02, A5, 05, 30, 31, 51, 52, 54, 55, 56, 57)
R24 steel, with self-lubrication, Ø 20 mm (for actuators 30, 31, 51, 52, 54, 55, 56, 57)
R41 316L stainless steel, Ø 20 mm (for actuators 30, 31, 51, 52, 54, 55, 56, 57)
R36 steel, with self-lubrication, Ø 16 mm (for actuators 30, 31, 51, 52, 54, 55, 56, 57)
R25 technopolymer, Ø 35 mm (for actuators 30, 31, 51, 52, 54, 55, 56, 57)
R5 rubber, Ø 40 mm (for actuators 30, 31, 51, 52, 54, 55, 56, 57)
R26 rubber, Ø 50 mm (for actuators 51, 52, 54, 55, 56, 57)
R27 rubber, protruding, Ø 50 mm (for actuators 55, 56)



Main features

- Technopolymer housing, one conduit entry
- Hinged cover, fixed with single captive screw
- Metal plates on mounting holes of the housing
- Protection degree IP67 and up to IP69K for actuators without external gasket
- 17 contact blocks available
- 48 actuators available
- Versions with external parts in stainless steel
- Versions with M12 connector
- Versions with gold-plated silver contacts

Quality marks:



IMQ approval: EG610
 UL approval: E131787
 CCC approval: 2024010305656753
 EAC approval: RU Д-IT.PA07.B.37848/24

Installation for safety applications:

Use only switches marked with the $\ominus$ symbol beside the product code. Always connect the safety circuit to the **NC contacts** (normally closed contacts: 11-12, 21-22 or 31-32) as required by **EN ISO 14119, paragraph 5.4** for specific interlock applications and **EN ISO 13849-2 tables D3** (well-tried components) and **D.8** (fault exclusions) for safety applications in general. Actuate the switch **at least up to the positive opening travel** shown in the travel diagrams on page 222. Actuate the switch **at least with the positive opening force**, reported in brackets below each article, next to the actuating force value.

⚠ If not expressly indicated in this chapter, for correct installation and utilization of all articles see chapter Utilization requirements from page 217 to page 232.

Technical data

Housing

Housing made of glass fibre reinforced technopolymer, self-extinguishing, shock-proof and with double insulation: $\square$

One threaded conduit entry:

M20x1.5 (standard)

Protection degree:

IP67 acc. to EN 60529 (with cable gland of equal or higher protection degree)

Protection degree with actuators 01, 02, 05, 07, 10, 12, 13, 14, 15, 15-R28, 16, 17, 30, 31, 33, 34, 38, 50, 51, 52, 53, 54, 56, 57, 69, 76

IP69K acc. to ISO 20653 (cable gland of equal or higher protection degree)

General data

Ambient temperature:

-25°C ... +80°C (standard)

-40°C ... +80°C (T6 option)

Max. actuation frequency:

3600 operating cycles/hour

Mechanical endurance:

20 million operating cycles

Mounting position:

any

Safety parameter B_{10D} :

40,000,000 for NC contacts

Mechanical interlock, not coded:

type 1 acc. to EN ISO 14119

Tightening torques for installation:

see page 221

Wire cross-sections and

wire stripping lengths:

see page 239

In compliance with standards:

IEC 60947-5-1, EN 60947-5-1, IEC 60947-1, EN 60947-1, EN 50047, IEC 60204-1, EN 60204-1, EN ISO 14119, EN ISO 12100, IEC 60529, EN 60529, EN IEC 63000, UL 508, CSA C22.2 No. 14.

Approvals:

IEC 60947-5-1, UL 508, CSA C22.2 No. 14, GB/T14048.5.

Compliance with the requirements of:

Low Voltage Directive 2014/35/EU, EMC Directive 2014/30/EU, RoHS Directive 2011/65/EU.

Positive contact opening in conformity with standards:

IEC 60947-5-1, EN 60947-5-1.

Electrical data

Utilization category

without connector	Thermal current (I_{th}):	10 A	Alternating current: AC15 (50÷60 Hz) Ue (V) 250 400 500 Ie (A) 6 4 1 Direct current: DC13 Ue (V) 24 125 250 Ie (A) 3 0.55 0.3			
	Rated insulation voltage (U):	500 Vac 600 Vdc 400 Vac 500 Vdc (contact blocks 2, 11, 12, 20, 21, 22)				
	Rated impulse withstand voltage (U_{imp}):	6 kV 4 kV (contact blocks 20, 21, 22)				
	Conditional short circuit current: Protection against short circuits: Pollution degree:	1000 A acc. to EN 60947-5-1 type aM fuse 10 A 500 V 3				
with M12 connector, 4-pole	Thermal current (I_{th}):	4 A	Alternating current: AC15 (50÷60 Hz) Ue (V) 24 120 250 Ie (A) 4 4 4 Direct current: DC13 Ue (V) 24 125 250 Ie (A) 3 0.55 0.3			
	Rated insulation voltage (U):	250 Vac 300 Vdc				
	Protection against short circuits:	type gG fuse 4 A 500 V				
	Pollution degree:	3				
with M12 connector, 8-pole	Thermal current (I_{th}):	2 A	Alternating current: AC15 (50÷60 Hz) Ue (V) 24 Ie (A) 2 Direct current: DC13 Ue (V) 24 Ie (A) 2			
	Rated insulation voltage (U):	30 Vac 36 Vdc				
	Protection against short circuits:	type gG fuse 2 A 500 V				
	Pollution degree:	3				



Features approved by IMO

Rated insulation voltage (U_i): 500 Vac
400 Vac (for contact blocks 2, 11, 12, 20, 21, 22, 28, 29, 30, 37, 33, 34)

Conventional free air thermal current (I_{th}): 10 A

Protection against short circuits: type aM fuse 10 A 500 V

Rated impulse withstand voltage (U_{imp}): 6 kV
4 kV (for contact blocks 20, 21, 22, 28, 29, 30, 33, 34)

Protection degree of the housing: IP67

MV terminals (screw terminals)

Pollution degree: 3

Utilization category: AC15

Operating voltage (U_e): 400 Vac (50 Hz)

Operating current (I_e): 3 A

Forms of the contact element: Za, Za+Za, X+X, Zb, Y+Y, Y+Y+X, Y+Y+Y, Y+X+X, Y, X.

Positive opening of contacts on contact blocks 5, 6, 7, 8, 9, 11, 13, 14, 16, 17, 18, 19, 20, 21, 22, 28, 29, 30, 33, 34, 37, 38, 39, 66.

In compliance with standards: EN 60947-1, EN 60947-5-1, fundamental requirements of the Low Voltage Directive 2014/35/EU.

Please contact our technical department for the list of approved products.

Features approved by UL

Electrical Ratings: Q300 pilot duty (69 VA, 125-250 V dc)
A600 pilot duty (720 VA, 120-600 V ac)

Environmental Ratings: Types 1, 4X

For all contact blocks except 2 and 3 use 60 or 75°C copper (Cu) conductors, rigid or flexible, wire size 12, 14 AWG. Tightening torque for terminal screws of 7.1 lb in (0.8 Nm).

For contact blocks 2 and 3 use 60 or 75°C copper (Cu) conductors, rigid or flexible, wire size 14 AWG. Tightening torque for terminal screws of 12 lb in (1.4 Nm).

The hub is to be connected to the conduit before the hub is connected to the enclosure.


Please contact our technical department for the list of approved products.

Wiring diagram for M12 connectors




Contact block 2 2x(1NO-1NC)	Contact block 5 1NO+1NC	Contact block 6 1NO+1NC	Contact block 7 1NO+1NC	Contact block 9 2NC	Contact block 10 2NO	Contact block 11 2NC	Contact block 12 2NO	Contact block 13 2NC
M12 connector, 8-pole	M12 connector, 4-pole	M12 connector, 4-pole	M12 connector, 4-pole	M12 connector, 4-pole	M12 connector, 4-pole	M12 connector, 4-pole	M12 connector, 4-pole	M12 connector, 4-pole
Contacts Pin no.	Contacts Pin no.	Contacts Pin no.	Contacts Pin no.	Contacts Pin no.	Contacts Pin no.	Contacts Pin no.	Contacts Pin no.	Contacts Pin no.
NO 3-4	NC 1-2	NC 1-2	NC 1-2	NC 1-2	NO 1-2	NC 1-2	NO 1-2	NC (1°) 1-2
NC 5-6	NO 3-4	NO 3-4	NO 3-4	NC 3-4	NO 3-4	NC 3-4	NO 3-4	NC (2°) 3-4
NO 7-8								
NC 1-2								




Contact block 14 2NC	Contact block 15 2NO	Contact block 16 2NC	Contact block 18 1NO+1NC	Contact block 20 1NO+2NC	Contact block 21 3NC	Contact block 22 2NO+1NC	Contact block 33 1NO+1NC	Contact block 34 2NC
M12 connector, 4-pole	M12 connector, 4-pole	M12 connector, 4-pole	M12 connector, 4-pole	M12 connector, 8-pole	M12 connector, 8-pole	M12 connector, 8-pole	M12 connector, 4-pole	M12 connector, 4-pole
Contacts Pin no.	Contacts Pin no.	Contacts Pin no.	Contacts Pin no.	Contacts Pin no.	Contacts Pin no.	Contacts Pin no.	Contacts Pin no.	Contacts Pin no.
NC (1°) 1-2	NO (1°) 1-2	NC, lever to the right 1-2	NC 1-2	NC 3-4	NC 3-4	NC 3-4	NC 1-2	NC 1-2
NC (2°) 3-4	NO (2°) 3-4	NC, lever to the left 3-4	NO 3-4	NC 5-6	NC 5-6	NO 5-6	NO 3-4	NC 3-4
				NO 7-8	NC 7-8	NO 7-8		

Contact block E1
PNP



Contacts	Pin no.
+	1
-	3
NC	2
NO	4

Contact type		External gasket		With steel roller with self-lubrication or 316L stainless steel on request		External gasket	
R = snap action L = slow action LO = slow action, make before break LS = slow action, shifted LV = slow action, shifted and spaced LI = slow action, independent LA = slow action, close ⚡ = electronic, PNP							
Contact block							
2	R	FR 201-M2	2x(1NO-1NC)	/		FR 202-M2	2x(1NO-1NC)
5	R	FR 501-M2	1NO+1NC	FR 5A1-M2	1NO+1NC	FR 502-M2	1NO+1NC
6	L	FR 601-M2	1NO+1NC	FR 6A1-M2	1NO+1NC	FR 602-M2	1NO+1NC
7	LO	FR 701-M2	1NO+1NC	FR 7A1-M2	1NO+1NC	FR 702-M2	1NO+1NC
9	L	FR 901-M2	2NC	FR 9A1-M2	2NC	FR 902-M2	2NC
10	L	FR 1001-M2	2NO	FR 10A1-M2	2NO	FR 1002-M2	2NO
11	R	FR 1101-M2	2NC	FR 11A1-M2	2NC	FR 1102-M2	2NC
12	R	FR 1201-M2	2NO	FR 12A1-M2	2NO	FR 1202-M2	2NO
13	LV	FR 1301-M2	2NC	FR 13A1-M2	2NC	FR 1302-M2	2NC
14	LS	FR 1401-M2	2NC	FR 14A1-M2	2NC	FR 1402-M2	2NC
15	LS	FR 1501-M2	2NO	FR 15A1-M2	2NO	FR 1502-M2	2NO
18	LA	FR 1801-M2	1NO+1NC	FR 18A1-M2	1NO+1NC	FR 1802-M2	1NO+1NC
20	L	FR 2001-M2	1NO+2NC	FR 20A1-M2	1NO+2NC	FR 2002-M2	1NO+2NC
21	L	FR 2101-M2	3NC	FR 21A1-M2	3NC	FR 2102-M2	3NC
22	L	FR 2201-M2	2NO+1NC	FR 22A1-M2	2NO+1NC	FR 2202-M2	2NO+1NC
E1	⚡	FR E101-M2	1NO-1NC	FR E1A1-M2	1NO-1NC	FR E102-M2	1NO-1NC
Max. speed		page 221 - type 4		page 221 - type 3		page 221 - type 3	
Actuating force		8 N (25 N $\rightarrow$)		6 N (25 N $\rightarrow$)		4.3 N (25 N $\rightarrow$)	
Travel diagrams		page 222 - group 1		page 222 - group 2		page 222 - group 2	

Contact type		External gasket		With steel roller with self-lubrication or 316L stainless steel on request		External gasket	
R = snap action L = slow action LO = slow action, make before break LS = slow action, shifted LV = slow action, shifted and spaced LI = slow action, independent LA = slow action, close ⚡ = electronic, PNP							
Contact block							
2	R	FR 2A4-M2	2x(1NO-1NC)	FR 205-M2	2x(1NO-1NC)	FR 2A5-M2	2x(1NO-1NC)
5	R	FR 5A4-M2	1NO+1NC	FR 505-M2	1NO+1NC	FR 5A5-M2	1NO+1NC
6	L	FR 6A4-M2	1NO+1NC	FR 605-M2	1NO+1NC	FR 6A5-M2	1NO+1NC
7	LO	FR 7A4-M2	1NO+1NC	FR 705-M2	1NO+1NC	FR 7A5-M2	1NO+1NC
9	L	FR 9A4-M2	2NC	FR 905-M2	2NC	FR 9A5-M2	2NC
10	L	FR 10A4-M2	2NO	FR 1005-M2	2NO	FR 10A5-M2	2NO
11	R	FR 11A4-M2	2NC	FR 1105-M2	2NC	FR 11A5-M2	2NC
12	R	FR 12A4-M2	2NO	FR 1205-M2	2NO	FR 12A5-M2	2NO
13	LV	FR 13A4-M2	2NC	FR 1305-M2	2NC	FR 13A5-M2	2NC
14	LS	FR 14A4-M2	2NC	FR 1405-M2	2NC	FR 14A5-M2	2NC
15	LS	FR 15A4-M2	2NO	FR 1505-M2	2NO	FR 15A5-M2	2NO
18	LA	FR 18A4-M2	1NO+1NC	FR 1805-M2	1NO+1NC	FR 18A5-M2	1NO+1NC
20	L	FR 20A4-M2	1NO+2NC	FR 2005-M2	1NO+2NC	FR 20A5-M2	1NO+2NC
21	L	FR 21A4-M2	3NC	FR 2105-M2	3NC	FR 21A5-M2	3NC
22	L	FR 22A4-M2	2NO+1NC	FR 2205-M2	2NO+1NC	FR 22A5-M2	2NO+1NC
E1	⚡	FR E1A4-M2	1NO-1NC	FR E105-M2	1NO-1NC	FR E1A5-M2	1NO-1NC
Max. speed		page 221 - type 5		page 221 - type 3		page 221 - type 3	
Actuating force		6 N (25 N $\rightarrow$)		6 N (25 N $\rightarrow$)		4.3 N (25 N $\rightarrow$)	
Travel diagrams		page 222 - group 1		page 222 - group 2		page 222 - group 3	




Contact type		External gasket		External gasket		Secured only by means of threaded head in vertical position	
R = snap action L = slow action LO = slow action, make before break LS = slow action, shifted LV = slow action, shifted and spaced LI = slow action, independent LA = slow action, close A = electronic, PNP							
Contact block							
2	R	FR 2A7-M2	2x(1NO-1NC)	FR 208-M2	2x(1NO-1NC)	FR 210-M2	2x(1NO-1NC)
5	R	FR 5A7-M2	1NO+1NC	FR 508-M2	1NO+1NC	FR 510-M2	1NO+1NC
6	L	FR 6A7-M2	1NO+1NC	FR 608-M2	1NO+1NC	FR 610-M2	1NO+1NC
7	LO	FR 7A7-M2	1NO+1NC	FR 708-M2	1NO+1NC	FR 710-M2	1NO+1NC
9	L	FR 9A7-M2	2NC	FR 908-M2	2NC	FR 910-M2	2NC
10	L	FR 10A7-M2	2NO	FR 1008-M2	2NO	FR 1010-M2	2NO
11	R	FR 11A7-M2	2NC	FR 1108-M2	2NC	FR 1110-M2	2NC
12	R	FR 12A7-M2	2NO	FR 1208-M2	2NO	FR 1210-M2	2NO
13	LV	FR 13A7-M2	2NC	FR 1308-M2	2NC	FR 1310-M2	2NC
14	LS	FR 14A7-M2	2NC	FR 1408-M2	2NC	FR 1410-M2	2NC
15	LS	FR 15A7-M2	2NO	FR 1508-M2	2NO	FR 1510-M2	2NO
18	LA	FR 18A7-M2	1NO+1NC	FR 1808-M2	1NO+1NC	FR 1810-M2	1NO+1NC
20	L	FR 20A7-M2	1NO+2NC	FR 2008-M2	1NO+2NC	FR 2010-M2	1NO+2NC
21	L	FR 21A7-M2	3NC	FR 2108-M2	3NC	FR 2110-M2	3NC
22	L	FR 22A7-M2	2NO+1NC	FR 2208-M2	2NO+1NC	FR 2210-M2	2NO+1NC
E1	A	FR E1A7-M2	1NO-1NC	FR E108-M2	1NO-1NC	FR E110-M2	1NO-1NC
Max. speed		page 221 - type 3		page 221 - type 4		page 221 - type 4	
Actuating force		3 N (25 N $\rightarrow$)		8 N (25 N $\rightarrow$)		8 N (25 N $\rightarrow$)	
Travel diagrams		page 222 - group 3		page 222 - group 1		page 222 - group 1	


Contact type		Roller, Ø 11 mm, technopolymer		Steel roller, Ø 12 mm, with self-lubrication With 316L stainless steel roller on request	
R = snap action L = slow action LO = slow action, make before break LS = slow action, shifted LV = slow action, shifted and spaced LI = slow action, independent LA = slow action, close A = electronic, PNP					
Contact block					
2	R	FR 213-M2	2x(1NO-1NC)	FR 214-M2	2x(1NO-1NC)
5	R	FR 513-M2	1NO+1NC	FR 514-M2	1NO+1NC
6	L	FR 613-M2	1NO+1NC	FR 614-M2	1NO+1NC
7	LO	FR 713-M2	1NO+1NC	FR 714-M2	1NO+1NC
9	L	FR 913-M2	2NC	FR 914-M2	2NC
10	L	FR 1013-M2	2NO	FR 1014-M2	2NO
11	R	FR 1113-M2	2NC	FR 1114-M2	2NC
12	R	FR 1213-M2	2NO	FR 1214-M2	2NO
13	LV	FR 1313-M2	2NC	FR 1314-M2	2NC
14	LS	FR 1413-M2	2NC	FR 1414-M2	2NC
15	LS	FR 1513-M2	2NO	FR 1514-M2	2NO
18	LA	FR 1813-M2	1NO+1NC	FR 1814-M2	1NO+1NC
20	L	FR 2013-M2	1NO+2NC	FR 2014-M2	1NO+2NC
21	L	FR 2113-M2	3NC	FR 2114-M2	3NC
22	L	FR 2213-M2	2NO+1NC	FR 2214-M2	2NO+1NC
E1	A	FR E113-M2	1NO-1NC	FR E114-M2	1NO-1NC
Max. speed		page 221 - type 2		page 221 - type 2	
Actuating force		8 N (25 N $\rightarrow$)		8 N (25 N $\rightarrow$)	
Travel diagrams		page 222 - group 1		page 222 - group 1	

Contact type


R = snap action
L = slow action
LO = slow action, make before break
LS = slow action, shifted
LV = slow action, shifted and spaced
LI = slow action, independent
LA = slow action, close
 = electronic, PNP




Secured only by means of threaded head in vertical position



External gasket
Spring rod



External gasket
Spring rod




Contact block


2	R	FR 216-M2	2x(1NO-1NC)	FR 217-M2	2x(1NO-1NC)	FR 220-M2	2x(1NO-1NC)	FR 221-M2	2x(1NO-1NC)
5	R	FR 516-M2	➔ 1NO+1NC	FR 517-M2	➔ 1NO+1NC	FR 520-M2	1NO+1NC	FR 521-M2	1NO+1NC
6	L	FR 616-M2	➔ 1NO+1NC	FR 617-M2	➔ 1NO+1NC	/	/	/	/
7	LO	FR 716-M2	➔ 1NO+1NC	FR 717-M2	➔ 1NO+1NC	/	/	/	/
9	L	FR 916-M2	➔ 2NC	FR 917-M2	➔ 2NC	/	/	/	/
10	L	FR 1016-M2	2NO	FR 1017-M2	2NO	FR 1020-M2	2NO	FR 1021-M2	2NO
11	R	FR 1116-M2	➔ 2NC	FR 1117-M2	➔ 2NC	/	/	/	/
12	R	FR 1216-M2	2NO	FR 1217-M2	2NO	FR 1220-M2	2NO	FR 1221-M2	2NO
13	LV	FR 1316-M2	➔ 2NC	FR 1317-M2	➔ 2NC	/	/	/	/
14	LS	FR 1416-M2	➔ 2NC	FR 1417-M2	➔ 2NC	/	/	/	/
15	LS	FR 1516-M2	2NO	FR 1517-M2	2NO	/	/	/	/
18	LA	FR 1816-M2	➔ 1NO+1NC	FR 1817-M2	➔ 1NO+1NC	FR 1820-M2	1NO+1NC	FR 1821-M2	1NO+1NC
20	L	FR 2016-M2	➔ 1NO+2NC	FR 2017-M2	➔ 1NO+2NC	FR 2020-M2	1NO+2NC	FR 2021-M2	1NO+2NC
21	L	FR 2116-M2	➔ 3NC	FR 2117-M2	➔ 3NC	FR 2120-M2	3NC	FR 2121-M2	3NC
22	L	FR 2216-M2	➔ 2NO+1NC	FR 2217-M2	➔ 2NO+1NC	FR 2220-M2	2NO+1NC	FR 2221-M2	2NO+1NC
E1		FR E116-M2	1NO-1NC	FR E117-M2	1NO-1NC	FR E120-M2	1NO-1NC	FR E121-M2	1NO-1NC
Max. speed		page 221 - type 2		page 221 - type 2		1 m/s		1 m/s	
Actuating force		8 N (25 N ➔)		8 N (25 N ➔)		0.07 Nm		0.07 Nm	
Travel diagrams		page 222 - group 1		page 222 - group 1		page 222 - group 4		page 222 - group 4	

Contact type


R = snap action
L = slow action
LO = slow action, make before break
LS = slow action, shifted
LV = slow action, shifted and spaced
LI = slow action, independent
LA = slow action, close
 = electronic, PNP




External gasket
Spring rod



With Ø 20 mm steel roller with self-lubrication or 316L stainless steel on request



Other rollers available. See page 66



Contact block









2	R	FR 222-M2	2x(1NO-1NC)	FR 225-M2	2x(1NO-1NC)	FR 230-M2	2x(1NO-1NC)	FR 231-M2	2x(1NO-1NC)
5	R	/	/	FR 525-M2	1NO+1NC	FR 530-M2	➔ 1NO+1NC	FR 531-M2	➔ 1NO+1NC
6	L	/	/	/	/	FR 630-M2	➔ 1NO+1NC	FR 631-M2	➔ 1NO+1NC
7	LO	/	/	/	/	FR 730-M2	➔ 1NO+1NC	FR 731-M2	➔ 1NO+1NC
9	L	/	/	/	/	FR 930-M2	➔ 2NC	FR 931-M2	➔ 2NC
10	L	FR 1022-M2	2NO	FR 1025-M2	2NO	FR 1030-M2	2NO	FR 1031-M2	2NO
11	R	/	/	/	/	FR 1130-M2	➔ 2NC	FR 1131-M2	➔ 2NC
12	R	FR 1222-M2	2NO	FR 1225-M2	2NO	FR 1230-M2	2NO	FR 1231-M2	2NO
13	LV	/	/	/	/	FR 1330-M2	➔ 2NC	FR 1331-M2	➔ 2NC
14	LS	/	/	/	/	FR 1430-M2	➔ 2NC	FR 1431-M2	➔ 2NC
15	LS	/	/	/	/	FR 1530-M2	2NO	FR 1531-M2	2NO
16	LI	/	/	/	/	FR 1630-M2	➔ 2NC	FR 1631-M2	➔ 2NC
18	LA	FR 1822-M2	➔ 1NO+1NC	FR 1825-M2	1NO+1NC	FR 1830-M2	➔ 1NO+1NC	FR 1831-M2	➔ 1NO+1NC
20	L	FR 2022-M2	➔ 1NO+2NC	FR 2025-M2	1NO+2NC	FR 2030-M2	➔ 1NO+2NC	FR 2031-M2	➔ 1NO+2NC
21	L	FR 2122-M2	➔ 3NC	FR 2125-M2	3NC	FR 2130-M2	➔ 3NC	FR 2131-M2	➔ 3NC
22	L	FR 2222-M2	➔ 2NO+1NC	FR 2225-M2	2NO+1NC	FR 2230-M2	➔ 2NO+1NC	FR 2231-M2	➔ 2NO+1NC
E1		FR E122-M2	1NO-1NC	FR E125-M2	1NO-1NC	FR E130-M2	1NO-1NC	FR E131-M2	1NO-1NC
Max. speed		1 m/s		1 m/s		page 221 - type 1		page 221 - type 1	
Actuating force		0.12 Nm (0.25 Nm ➔)		0.12 Nm		0.06 Nm (0.25 Nm ➔)		0.06 Nm (0.25 Nm ➔)	
Travel diagrams		page 222 - group 4		page 222 - group 4		page 222 - group 5		page 222 - group 5	

All values in the drawings are in mm

Accessories See page 195

➔ The 2D and 3D files are available at www.pizzato.com



Contact type			Square rod, 3x3 mm		Spring rod		Round rod, Ø 3 mm, stainless steel		Other rollers available. See page 66	
R	= snap action									
L	= slow action									
LO	= slow action, make before break									
LS	= slow action, shifted									
LV	= slow action, shifted and spaced									
LI	= slow action, independent									
LA	= slow action, close									
	= electronic, PNP									
Contact block										
2	R	FR 233-M2	2x(1NO-1NC)		FR 234-M2	2x(1NO-1NC)	FR 250-M2	2x(1NO-1NC)	FR 251-M2	2x(1NO-1NC)
5	R	FR 533-M2	1NO+1NC		FR 534-M2	1NO+1NC	FR 550-M2	1NO+1NC	FR 551-M2	1NO+1NC
6	L	FR 633-M2	1NO+1NC		FR 634-M2	1NO+1NC	FR 650-M2	1NO+1NC	FR 651-M2	1NO+1NC
7	LO	FR 733-M2	1NO+1NC		FR 734-M2	1NO+1NC	FR 750-M2	1NO+1NC	FR 751-M2	1NO+1NC
9	L	FR 933-M2	2NC		FR 934-M2	2NC	FR 950-M2	2NC	FR 951-M2	2NC
10	L	FR 1033-M2	2NO		FR 1034-M2	2NO	FR 1050-M2	2NO	FR 1051-M2	2NO
11	R	FR 1133-M2	2NC		FR 1134-M2	2NC	FR 1150-M2	2NC	FR 1151-M2	2NC
12	R	FR 1233-M2	2NO		FR 1234-M2	2NO	FR 1250-M2	2NO	FR 1251-M2	2NO
13	LV	FR 1333-M2	2NC		FR 1334-M2	2NC	FR 1350-M2	2NC	FR 1351-M2	2NC
14	LS	FR 1433-M2	2NC		FR 1434-M2	2NC	FR 1450-M2	2NC	FR 1451-M2	2NC
15	LS	FR 1533-M2	2NO		FR 1534-M2	2NO	FR 1550-M2	2NO	FR 1551-M2	2NO
16	LI	FR 1633-M2	2NC		FR 1634-M2	2NC	FR 1650-M2	2NC	FR 1651-M2	2NC
18	LA	FR 1833-M2	1NO+1NC		FR 1834-M2	1NO+1NC	FR 1850-M2	1NO+1NC	FR 1851-M2	1NO+1NC
20	L	FR 2033-M2	1NO+2NC		FR 2034-M2	1NO+2NC	FR 2050-M2	1NO+2NC	FR 2051-M2	1NO+2NC
21	L	FR 2133-M2	3NC		FR 2134-M2	3NC	FR 2150-M2	3NC	FR 2151-M2	3NC
22	L	FR 2233-M2	2NO+1NC		FR 2234-M2	2NO+1NC	FR 2250-M2	2NO+1NC	FR 2251-M2	2NO+1NC
E1		FR E133-M2	1NO-1NC		FR E134-M2	1NO-1NC	FR E150-M2	1NO-1NC	FR E151-M2	1NO-1NC
Max. speed			1.5 m/s		1.5 m/s		1.5 m/s		page 221 - type 1	
Actuating force			0.06 Nm		0.06 Nm		0.06 Nm		0.06 Nm (0.25 Nm)	
Travel diagrams			page 222 - group 5		page 222 - group 5		page 222 - group 5		page 222 - group 5	
Contact type			Other rollers available. See page 66		Porcelain roller		Other rollers available. See page 66		Other rollers available. See page 66	
R	= snap action									
L	= slow action									
LO	= slow action, make before break									
LS	= slow action, shifted									
LV	= slow action, shifted and spaced									
LI	= slow action, independent									
LA	= slow action, close									
	= electronic, PNP									
Contact block										
2	R	FR 252-M2	2x(1NO-1NC)		FR 253-E0M2	2x(1NO-1NC)	FR 254-M2	2x(1NO-1NC)	FR 256-M2	2x(1NO-1NC)
5	R	FR 552-M2	1NO+1NC		FR 553-E0M2V9	1NO+1NC	FR 554-M2	1NO+1NC	FR 556-M2	1NO+1NC
6	L	FR 652-M2	1NO+1NC		FR 653-E0M2V9	1NO+1NC	FR 654-M2	1NO+1NC	FR 656-M2	1NO+1NC
7	LO	FR 752-M2	1NO+1NC		FR 753-E0M2V9	1NO+1NC	FR 754-M2	1NO+1NC	FR 756-M2	1NO+1NC
9	L	FR 952-M2	2NC		FR 953-E0M2V9	2NC	FR 954-M2	2NC	FR 956-M2	2NC
10	L	FR 1052-M2	2NO		FR 1053-E0M2V9	2NO	FR 1054-M2	2NO	FR 1056-M2	2NO
11	R	FR 1152-M2	2NC		/		FR 1154-M2	2NC	FR 1156-M2	2NC
12	R	FR 1252-M2	2NO		FR 1253-E0M2V9	2NO	FR 1254-M2	2NO	FR 1256-M2	2NO
13	LV	FR 1352-M2	2NC		FR 1353-E0M2V9	2NC	FR 1354-M2	2NC	FR 1356-M2	2NC
14	LS	FR 1452-M2	2NC		FR 1453-E0M2V9	2NC	FR 1454-M2	2NC	FR 1456-M2	2NC
15	LS	FR 1552-M2	2NO		FR 1553-E0M2V9	2NO	FR 1554-M2	2NO	FR 1556-M2	2NO
16	LI	FR 1652-M2	2NC		/		FR 1654-M2	2NC	FR 1656-M2	2NC
18	LA	FR 1852-M2	1NO+1NC		FR 1853-E0M2V9	1NO+1NC	FR 1854-M2	1NO+1NC	FR 1856-M2	1NO+1NC
20	L	FR 2052-M2	1NO+2NC		FR 2053-E0M2V9	1NO+2NC	FR 2054-M2	1NO+2NC	FR 2056-M2	1NO+2NC
21	L	FR 2152-M2	3NC		FR 2153-E0M2V9	3NC	FR 2154-M2	3NC	FR 2156-M2	3NC
22	L	FR 2252-M2	2NO+1NC		FR 2253-E0M2V9	2NO+1NC	FR 2254-M2	2NO+1NC	FR 2256-M2	2NO+1NC
E1		FR E152-M2	1NO-1NC		FR E153-E0M2V9	1NO-1NC	FR E154-M2	1NO-1NC	FR E156-M2	1NO-1NC
Max. speed			page 221 - type 1		0.5 m/s		page 221 - type 1		page 221 - type 1	
Actuating force			0.06 Nm (0.25 Nm)		0.03 Nm (0.25 Nm)		0.06 Nm (0.25 Nm)		0.06 Nm (0.25 Nm)	
Travel diagrams			page 222 - group 5		page 222 - group 6		page 222 - group 5		page 222 - group 5	

All values in the drawings are in mm

Accessories See page 195

The 2D and 3D files are available at www.pizzato.com

Contact type




- R** = snap action
L = slow action
LO = slow action, make before break
LS = slow action, shifted
LV = slow action, shifted and spaced
LI = slow action, independent
LA = slow action, close
 = electronic, PNP

Contact block

Other rollers available. See page 66

Glass fibre rod

Rope switch for signalling



2	R	FR 257-M2	2x(1NO-1NC)	FR 269-M2	2x(1NO-1NC)	FR 276-M2	2x(1NO-1NC)
5	R	FR 557-M2	1NO+1NC	FR 569-M2	1NO+1NC	FR 576-M2	1NO+1NC
6	L	FR 657-M2	1NO+1NC	FR 669-M2	1NO+1NC	FR 676-M2	1NO+1NC
7	LO	FR 757-M2	1NO+1NC	FR 769-M2	1NO+1NC	FR 776-M2	1NO+1NC
9	L	FR 957-M2	2NC	FR 969-M2	2NC	FR 976-M2	2NO
10	L	FR 1057-M2	2NO	FR 1069-M2	2NO	FR 1076-M2	2NC
11	R	FR 1157-M2	2NC	FR 1169-M2	2NC	FR 1176-M2	2NO
12	R	FR 1257-M2	2NO	FR 1269-M2	2NO	FR 1276-M2	2NC
13	LV	FR 1357-M2	2NC	FR 1369-M2	2NC	FR 1376-M2	2NO
14	LS	FR 1457-M2	2NC	FR 1469-M2	2NC	FR 1476-M2	2NO
15	LS	FR 1557-M2	2NO	FR 1569-M2	2NO	FR 1576-M2	2NC
16	LI	FR 1657-M2	2NC	FR 1669-M2	2NC	/	
18	LA	FR 1857-M2	1NO+1NC	FR 1869-M2	1NO+1NC	FR 1876-M2	1NO+1NC
20	L	FR 2057-M2	1NO+2NC	FR 2069-M2	1NO+2NC	FR 2076-M2	2NO+1NC
21	L	FR 2157-M2	3NC	FR 2169-M2	3NC	FR 2176-M2	3NO
22	L	FR 2257-M2	2NO+1NC	FR 2269-M2	2NO+1NC	FR 2276-M2	1NO+2NC
E1		FR E157-M2	1NO-1NC	FR E169-M2	1NO-1NC	/	
Max. speed	page 221 - type 1			1.5 m/s	0.5 m/s		
Actuating force	0.06 Nm (0.25 Nm )			0.06 Nm	initial 20 N - final 40 N		
Travel diagrams	page 222 - group 5			page 222 - group 5	page 222 - group 7		

FR series position switches with reset



The majority of switches can be equipped with a reset device (option W3) which enables the simultaneous actuation of actuator and contact block. The device is a module that is mounted between the body and the head of the switch that can be rotated independently from the head. The reset device has the following advantages:





- can be integrated into the majority of standard actuator heads;
- contact blocks with snap action are no more necessary because the tripping movement is executed by the reset device itself;
- can be rotated independently from the head ensuring maximum flexibility during installation;
- can be delivered with two different actuating forces: standard and increased for vibration applications;
- mechanical endurance: 1 million operating cycles.

Contact type

- R** = snap action
L = slow action

With steel roller with self-lubrication or 316L stainless steel on request

With steel roller with self-lubrication or 316L stainless steel on request



Contact block

2	R	FR 201-W3M2	2x(1NO-1NC)	FR 202-W3M2	2x(1NO-1NC)	FR 205-W3M2	2x(1NO-1NC)	FR 207-W3M2	2x(1NO-1NC)
6	L	FR 601-W3M2	1NO+1NC	FR 602-W3M2	1NO+1NC	FR 605-W3M2	1NO+1NC	FR 607-W3M2	1NO+1NC
9	L	FR 901-W3M2	2NC	FR 902-W3M2	2NC	FR 905-W3M2	2NC	FR 907-W3M2	2NC
10	L	FR 1001-W3M2	2NO	FR 1002-W3M2	2NO	FR 1005-W3M2	2NO	FR 1007-W3M2	2NO
20	L	FR 2001-W3M2	1NO+2NC	FR 2002-W3M2	1NO+2NC	FR 2005-W3M2	1NO+2NC	FR 2007-W3M2	1NO+2NC
21	L	FR 2101-W3M2	3NC	FR 2102-W3M2	3NC	FR 2105-W3M2	3NC	FR 2107-W3M2	3NC
22	L	FR 2201-W3M2	2NO+1NC	FR 2202-W3M2	2NO+1NC	FR 2205-W3M2	2NO+1NC	FR 2207-W3M2	2NO+1NC
Max. speed	page 221 - type 4			page 221 - type 3	page 221 - type 3			page 221 - type 3	
Actuating force	4.5 N (25 N )			4 N (25 N )	4 N (25 N )			2.5 N (25 N )	
Travel diagrams	page 223 - group 1			page 223 - group 2	page 223 - group 2			page 223 - group 3	

All values in the drawings are in mm

Accessories See page 195


→ The 2D and 3D files are available at www.pizzato.com



Contact type		With Ø 12 mm steel roller with self-lubrication or 316L stainless steel on request		With Ø 20 mm steel roller with self-lubrication or 316L stainless steel on request		Other rollers available. See page 66		Other rollers available. See page 66	
R = snap action L = slow action									
Contact block									
2	R	FR 215-W3M2	2x(1NO-1NC)	FR 230-W3M2	2x(1NO-1NC)	FR 231-W3M2	2x(1NO-1NC)	FR 251-W3M2	2x(1NO-1NC)
6	L	FR 615-W3M2	1NO+1NC	FR 630-W3M2	1NO+1NC	FR 631-W3M2	1NO+1NC	FR 651-W3M2	1NO+1NC
9	L	FR 915-W3M2	2NC	FR 930-W3M2	2NC	FR 931-W3M2	2NC	FR 951-W3M2	2NC
10	L	FR 1015-W3M2	2NO	FR 1030-W3M2	2NO	FR 1031-W3M2	2NO	FR 1051-W3M2	2NO
20	L	FR 2015-W3M2	1NO+2NC	FR 2030-W3M2	1NO+2NC	FR 2031-W3M2	1NO+2NC	FR 2051-W3M2	1NO+2NC
21	L	FR 2115-W3M2	3NC	FR 2130-W3M2	3NC	FR 2131-W3M2	3NC	FR 2151-W3M2	3NC
22	L	FR 2215-W3M2	2NO+1NC	FR 2230-W3M2	2NO+1NC	FR 2231-W3M2	2NO+1NC	FR 2251-W3M2	2NO+1NC
Max. speed		page 221 - type 2		page 221 - type 1		page 221 - type 1		page 221 - type 1	
Actuating force		4.5 N (25 N $\rightarrow$)		0.07 Nm (0.25 Nm $\rightarrow$)		0.07 Nm (0.25 Nm $\rightarrow$)		0.07 Nm (0.25 Nm $\rightarrow$)	
Travel diagrams		page 223 - group 1		page 223 - group 4		page 223 - group 4		page 223 - group 4	

Contact type		Other rollers available. See page 66		Other rollers available. See page 66		Other rollers available. See page 66		Other rollers available. See page 66	
R = snap action L = slow action									
Contact block									
2	R	FR 252-W3M2	2x(1NO-1NC)	FR 254-W3M2	2x(1NO-1NC)	FR 256-W3M2	2x(1NO-1NC)	FR 257-W3M2	2x(1NO-1NC)
6	L	FR 652-W3M2	1NO+1NC	FR 654-W3M2	1NO+1NC	FR 656-W3M2	1NO+1NC	FR 657-W3M2	1NO+1NC
9	L	FR 952-W3M2	2NC	FR 954-W3M2	2NC	FR 956-W3M2	2NC	FR 957-W3M2	2NC
10	L	FR 1052-W3M2	2NO	FR 1054-W3M2	2NO	FR 1056-W3M2	2NO	FR 1057-W3M2	2NO
20	L	FR 2052-W3M2	1NO+2NC	FR 2054-W3M2	1NO+2NC	FR 2056-W3M2	1NO+2NC	FR 2057-W3M2	1NO+2NC
21	L	FR 2152-W3M2	3NC	FR 2154-W3M2	3NC	FR 2156-W3M2	3NC	FR 2157-W3M2	3NC
22	L	FR 2252-W3M2	2NO+1NC	FR 2254-W3M2	2NO+1NC	FR 2256-W3M2	2NO+1NC	FR 2257-W3M2	2NO+1NC
Max. speed		page 221 - type 1		page 221 - type 1		page 221 - type 1		page 221 - type 1	
Actuating force		0.07 Nm (0.25 Nm $\rightarrow$)		0.07 Nm (0.25 Nm $\rightarrow$)		0.07 Nm (0.25 Nm $\rightarrow$)		0.07 Nm (0.25 Nm $\rightarrow$)	
Travel diagrams		page 223 - group 4		page 223 - group 4		page 223 - group 4		page 223 - group 4	

Increased actuating force



The switch can be delivered with increased actuating force (option W4). Ideal for vibration applications.

Actuators	Actuating force
01, 14, 15, 16	7 N
02, 05	6 N
07	3.5 N
30 ... 57	0.08 Nm

To order the switch with reset and increased actuating force, replace the -W3 option with -W4 in the order code.

Example: FR 601-W3M2 $\rightarrow$ FR 601-W4M2

Position switches with swivelling lever without actuator

Contact type

- R** = snap action
L = slow action
LO = slow action, make before break
LS = slow action, shifted
LV = slow action, shifted and spaced
LI = slow action, independent
LA = slow action, close
 = electronic, PNP

Contact block

2	R	FR 238-M2	2x(1NO-1NC)	FR 238-W3M2	2x(1NO-1NC)
5	R	FR 538-M2	1NO+1NC	/	
6	L	FR 638-M2	1NO+1NC	FR 638-W3M2	1NO+1NC
7	LO	FR 738-M2	1NO+1NC	/	
9	L	FR 938-M2	2NC	FR 938-W3M2	2NC
10	L	FR 1038-M2	2NO	FR 1038-W3M2	2NO
11	R	FR 1138-M2	2NC	/	
12	R	FR 1238-M2	2NO	/	
13	LV	FR 1338-M2	2NC	/	
14	LS	FR 1438-M2	2NC	/	
15	LS	FR 1538-M2	2NO	/	
16	LI	FR 1638-M2	2NC	/	
18	LA	FR 1838-M2	1NO+1NC	/	
20	L	FR 2038-M2	1NO+2NC	FR 2038-W3M2	1NO+2NC
21	L	FR 2138-M2	3NC	FR 2138-W3M2	3NC
22	L	FR 2238-M2	2NO+1NC	FR 2238-W3M2	2NO+1NC
E1		FR E138-M2	1NO-1NC	/	
Actuating force		0.06 Nm (0.25 Nm →)		0.07 Nm (0.25 Nm →)	
Travel diagrams		page 222 - group 5		page 223 - group 4	

With manual reset knob



















IMPORTANT

For safety applications: join only switches and actuators marked with symbol  next to the product code.

For more information about safety applications see details on page 217.

Separate actuators

IMPORTANT: These separate actuators can be used only with items of the FR, FM, FX, FK, NA, NB and NF series.

Technopolymer roller Ø 18 mm	Technopolymer roller Ø 18 mm	Technopolymer roller Ø 14 mm	Technopolymer roller Ø 14 mm	Technopolymer roller Ø 20 mm	Technopolymer roller Ø 20 mm
					
VN A00KA →	VN A00KB →	VN A00KC →	VN A00KD →	VN A00KE →	VN A00KF →
Technopolymer roller Ø 20 mm	Technopolymer roller Ø 20 mm	Adjustable safety actuator with technopolymer roller	Adjustable square rod, 3x3x125 mm	Adjustable round rod Ø 3x125 mm	Adjustable glass fibre rod
					
VN A00KG →	VN A00KH →	VN A00KP →	VN A00LB	VN A00LE	VN A00LH
Spring rod with plastic tip	Porcelain roller	Technopolymer roller Ø 18 mm	Technopolymer roller Ø 20 mm	Technopolymer roller Ø 20 mm	Adjustable safety lever with Ø 20 mm technopolymer roller
		With metallic parts in stainless steel			
					
VN A00LL	VN A00LP → (2)	VN A00KB-V38 →	VN A00KE-V38 →	VN A00KG-V38 →	VN A00KP-V38 →

All values in the drawings are in mm

Accessories See page 195

→ The 2D and 3D files are available at www.pizzato.com

Special separate actuators

IMPORTANT: These separate actuators can be used only with items of the FR, FM, FX, FK, NA, NB and NF series.

Steel rollers, Ø 20 mm, with self-lubrication

VN A00KB-R24 (1)	VN A00KE-R24 (1)	VN A00KF-R24 (1)	VN A00KG-R24 (1)	VN A00KH-R24 (1)	VN A00KP-R24 (1)

Note: To order with 316L stainless steel roller: replace R24 with R41 in the order numbers.

Technopolymer rollers, Ø 35 mm

VN A00KB-R25 (1)	VN A00KE-R25 (1)	VN A00KF-R25 (1)	VN A00KG-R25 (1)	VN A00KH-R25 (1)	VN A00KP-R25 (1)

Rubber rollers, Ø 40 mm

VN A00KB-R5 (1)	VN A00KE-R5 (1)	VN A00KF-R5 (1)	VN A00KG-R5 (1)	VN A00KH-R5 (1)	VN A00KP-R5 (1)

Rubber rollers, Ø 50 mm

VN A00KE-R26 (1)	VN A00KF-R26 (1)	VN A00KG-R26 (1)	VN A00KH-R26 (1)	VN A00KP-R26 (1)

Protruding rubber rollers, Ø 50 mm

VN A00KP-R27 (1)

(1) The actuator cannot be rotated to the inside because it will hit the switch head upon actuation.

(2) The position switch obtained by assembling switch FR •38-M2 (e.g. FR 538-M2, FR 638-M2, ...) with actuator VN A00LP will not present the same travel diagrams and actuating forces as switch FR •53-E0M2V9 (e.g. FR 553-E0M2V9, FR 653-E0M2V9, ...).

Note: To check the correspondence with previous lever codes, please consult the table "Changed article codes" on page 277. Example: VF LE30 -> VN A00KA